


Feeder Breakers

Product Line

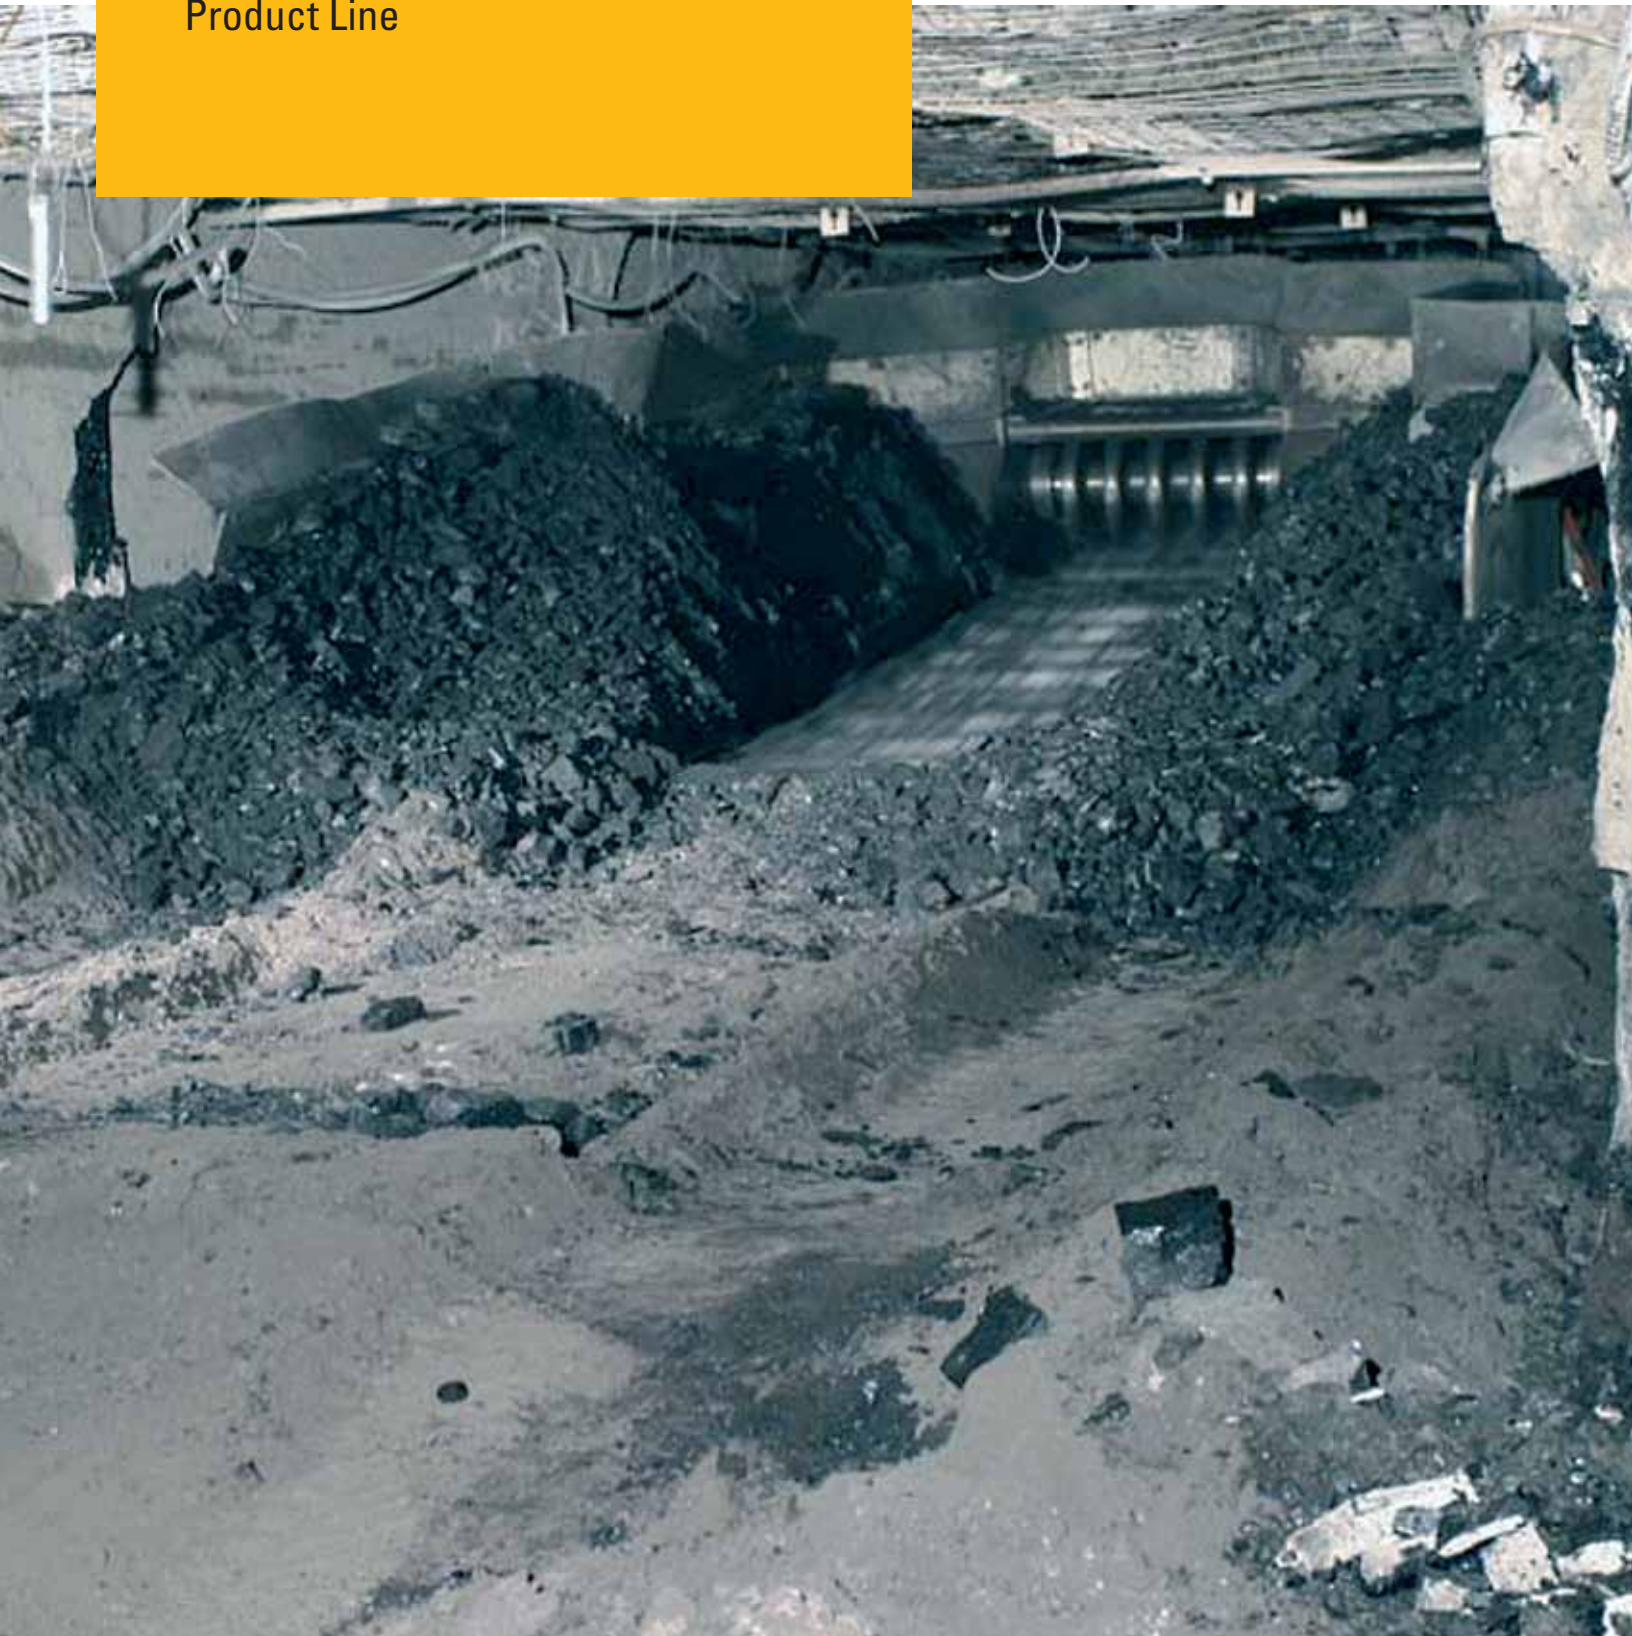

Feeder Breakers

Feeder breakers allow haulage vehicles to quickly discharge their payloads. They break mined material down to belt size and the ratio chains feed the broken material onto a conveyor belt, reducing the risk of conveyor belt jams and spillage. Cat® feeder breakers do the job with a large intake hopper capacity and high throughput rate. The high-speed/high-torque traction system has torque hubs instead of the hydraulic motors used on competitive models, delivering higher tram speeds for section moves and higher torque-to-ground for greater tractive effort.


Features

- Up to 1 633 tonnes/hour (1,800 tons/hour) discharge rate
- 27 200 kg (60,000 lb) pick force
- 126 980 kg/strand (280,000 lb/strand) ultimate strength, engineering class, rollertype conveyor chain
- 25 mm (1.0 in) AR 400 frame side steel 25 mm (1.0 in) plate fabricated hopper
- Hydraulically-adjustable ground clearance
- High tractive effort achieved with torque hub planetary crawler drive
- 14 m/min (47 ft/min) tram speed

Optional Features

- Shear pin or torque-limiting coupling breaker drivetrain protection
- Hydraulic, hydro-mechanical or electro-mechanical conveyor drives are available depending on application parameters and operation's preference
- Chromium Carbide Overlay coal line
- Customer hopper capacity design to suit application
- Hopper sideboards
- Shovelnose, 3-way dump, or face hauler hopper end
- Integral mounted belt tail roller with stabilizing hydraulic cylinders
- Ansul™ dry-chemical fire suppression system
- Electric solenoid-controlled dust suppression system
- Direct drive breakershaft and headshaft



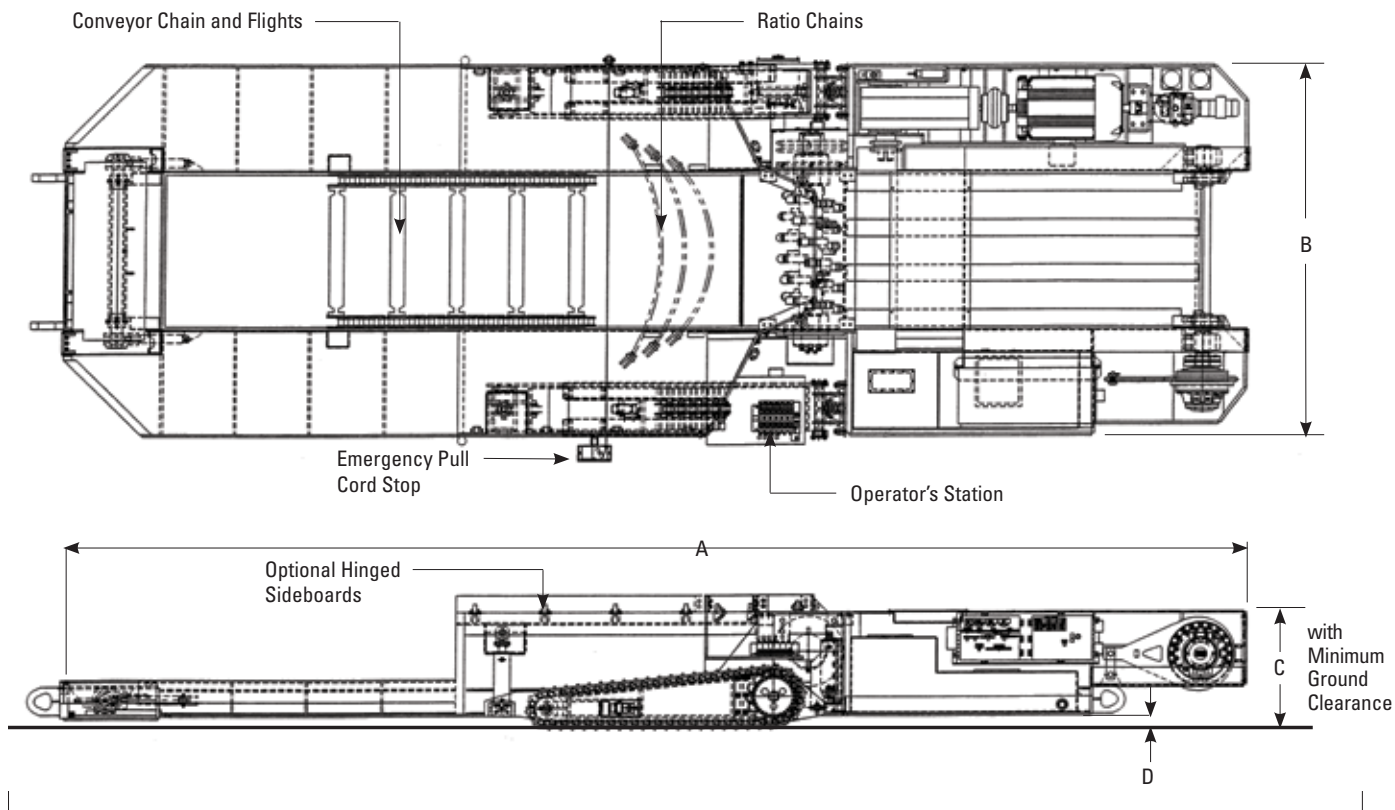

Model	A		B		C		D
FB75	10.36 m	34 ft	3.23 m	10 ft 7 in	0.73 m	28-5/8 in	Ground clearance is customer-specified from 75 mm (3 in) to 610 mm (24 in)
FB85	10.36 m	34 ft	3.43 m	11 ft 3 in	0.73 m	28-5/8 in	
FB110	10.28 m	33 ft 9 in	3.17 m	10 ft 4-3/4 in	0.94 m	36-13/16 in	
FB140	10.28 m	33 ft 9 in	3.37 m	11 ft 3/4 in	0.94 m	36-13/16 in	

Feeder Breaker – Product Line

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at mining.cat.com and www.cat.com

© 2011 Caterpillar Inc.

All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, their respective logos, “Caterpillar Yellow” and the “Power Edge” trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ0610

