


303.5E CR Mini Hydraulic Excavator

303.5E CR Dimensions

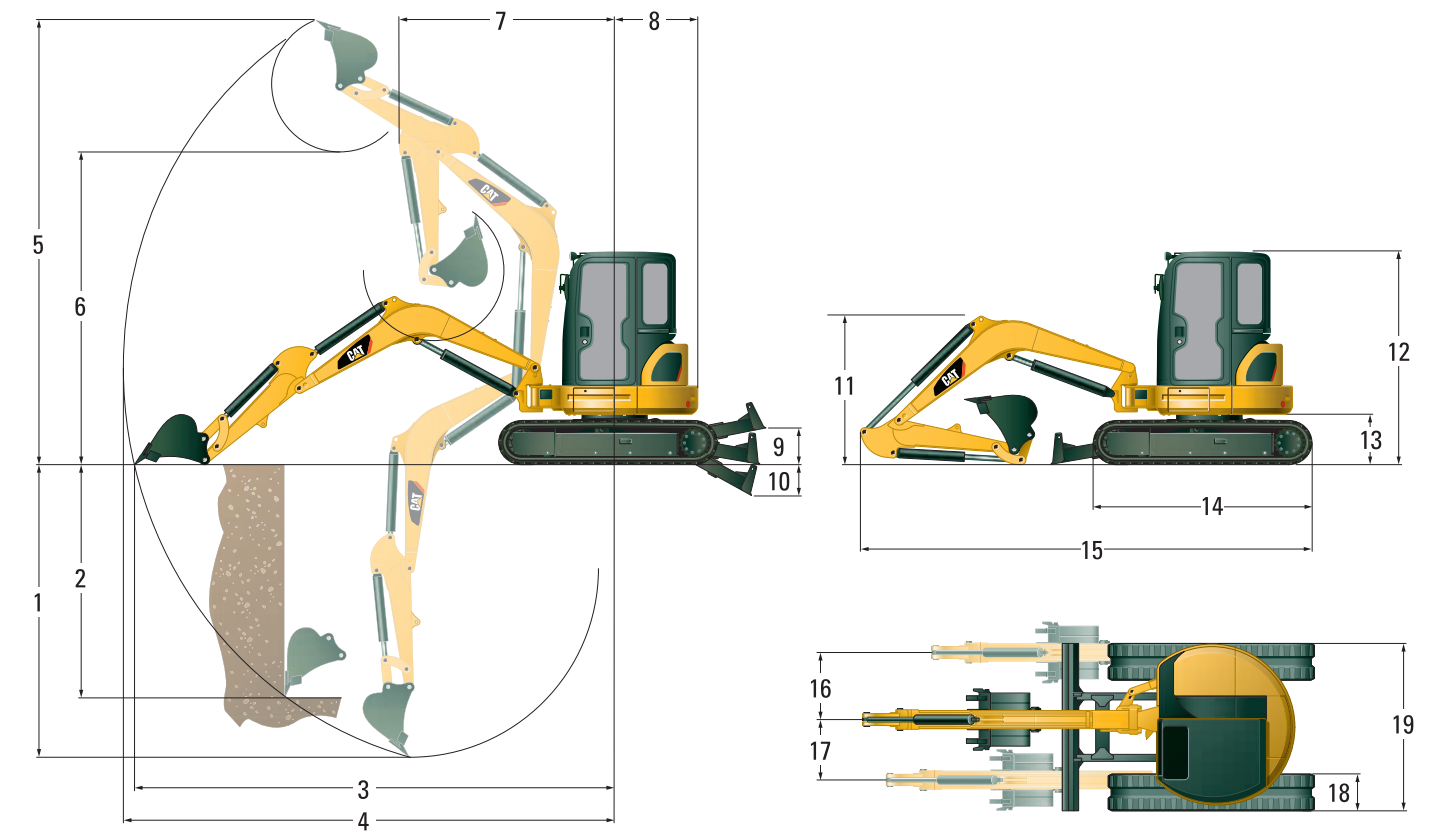

	Standard Stick		Long Stick	
1	2880 mm	9'6"	3180 mm	10'4"
2	2320 mm	7'8"	2470 mm	8'2"
3	5060 mm	16'8"	5320 mm	17'6"
4	5200 mm	17'1"	5440 mm	17'10"
5	4920 mm	16'2"	5030 mm	16'6"
6	3520 mm	11'6"	3640 mm	11'11"
7	2060 mm	6'9"	2180 mm	7'2"
8	890 mm	2'11"	890 mm	2'11"
9	400 mm	1'4"	400 mm	1'4"
10	470 mm	1'7"	470 mm	1'7"

	Standard Stick		Long Stick	
11	1420 mm	4'8"	1650 mm	5'4"
12	2500 mm	8'2"	2500 mm	8'2"
13	565 mm	1'10"	565 mm	1'10"
14	2220 mm	7'3"	2220 mm	7'3"
15	4730 mm	15'6"	4790 mm	15'9"
16	765 mm	2'6"	765 mm	2'6"
17	670 mm	2'2"	670 mm	2'2"
18	300 mm	1'0"	300 mm	1'0"
19	1780 mm	5'10"	1780 mm	5'10"

303.5E CR Lift Capacities at Ground Level*

Lift Point Radius		3000 mm (9'8")		4000 mm (13'1")	
		Front	Side	Front	Side
Blade Down	kg	1370	740	880	470
	lb	2,940	1,590	1,890	1,010
Blade Up	kg	770	680	490	440
	lb	1,698	1,499	1,080	970

* The above loads are in compliance with hydraulic excavator lift capacity rating standard ISO 10567:2007 and they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. The excavator bucket weight is not included on this chart. Lifting capacities are for standard stick.