
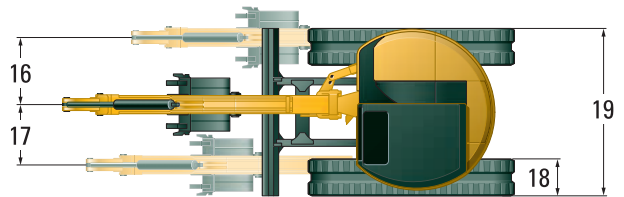
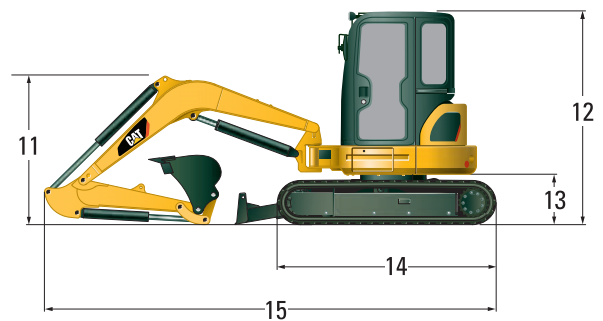


# 304E CR Mini Hydraulic Excavator

## 304E CR Dimensions

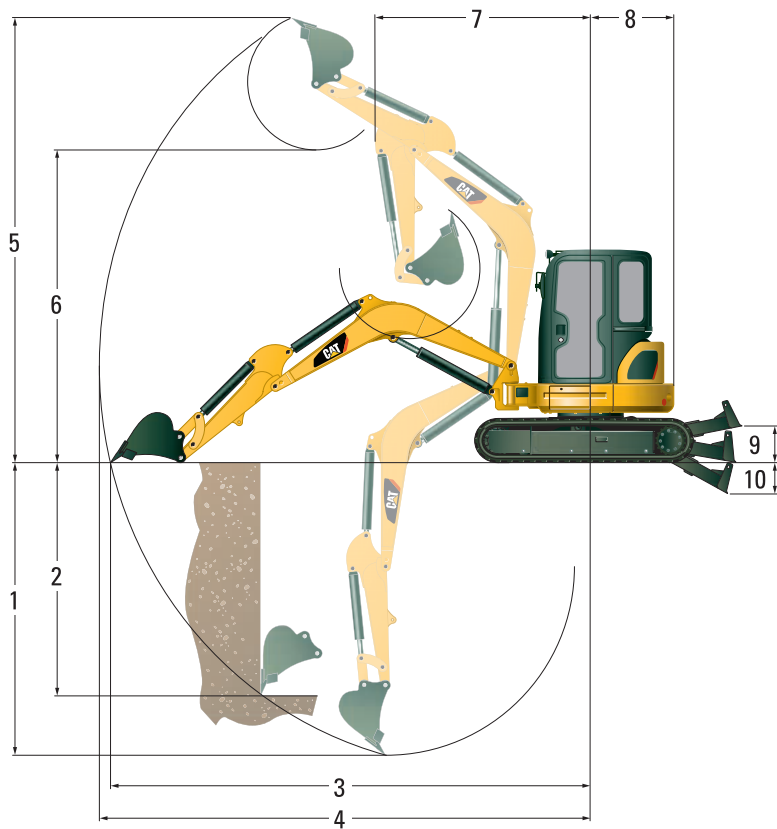

	Standard Stick		Long Stick	
<b>1</b>	3130 mm	10'3"	3430 mm	11'3"
<b>2</b>	2420 mm	8'0"	2560 mm	8'5"
<b>3</b>	5220 mm	17'1"	5470 mm	18'0"
<b>4</b>	5350 mm	17'7"	5590 mm	18'4"
<b>5</b>	4980 mm	16'5"	5070 mm	16'8"
<b>6</b>	3590 mm	11'9"	3690 mm	12'1"
<b>7</b>	2110 mm	6'11"	2220 mm	7'3"
<b>8</b>	975 mm	3'2"	975 mm	3'2"
<b>9</b>	400 mm	1'4"	400 mm	1'4"
<b>10</b>	470 mm	1'7"	470 mm	1'7"

	Standard Stick		Long Stick	
<b>11</b>	1480 mm	4'10"	1770 mm	5'9"
<b>12</b>	2500 mm	8'2"	2500 mm	8'2"
<b>13</b>	565 mm	1'10"	565 mm	1'10"
<b>14</b>	2220 mm	7'3"	2220 mm	7'3"
<b>15</b>	4820 mm	15'10"	4930 mm	16'2"
<b>16</b>	735 mm	2'5"	735 mm	2'5"
<b>17</b>	670 mm	2'2"	670 mm	2'2"
<b>18</b>	350 mm	1'1"	350 mm	1'1"
<b>19</b>	1950 mm	6'5"	1950 mm	6'5"

## 304E CR Lift Capacities at Ground Level\*

Lift Point Radius		3000 mm (9'8")		4500 mm (14'9")	
		Front	Side	Front	Side
Blade Down	<b>kg</b>	1610	920	1040	590
	<b>lb</b>	3,549	2,028	2,292	1,301
Blade Up	<b>kg</b>	830	830	530	530
	<b>lb</b>	1,830	1,830	1,168	1,168

\* The above loads are in compliance with hydraulic excavator lift capacity rating standard ISO 10567:2007 and they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. The excavator bucket weight is not included on this chart. Lifting capacities are for standard stick.