


# 308E2 CR SB Mini Hydraulic Excavator

## Dimensions

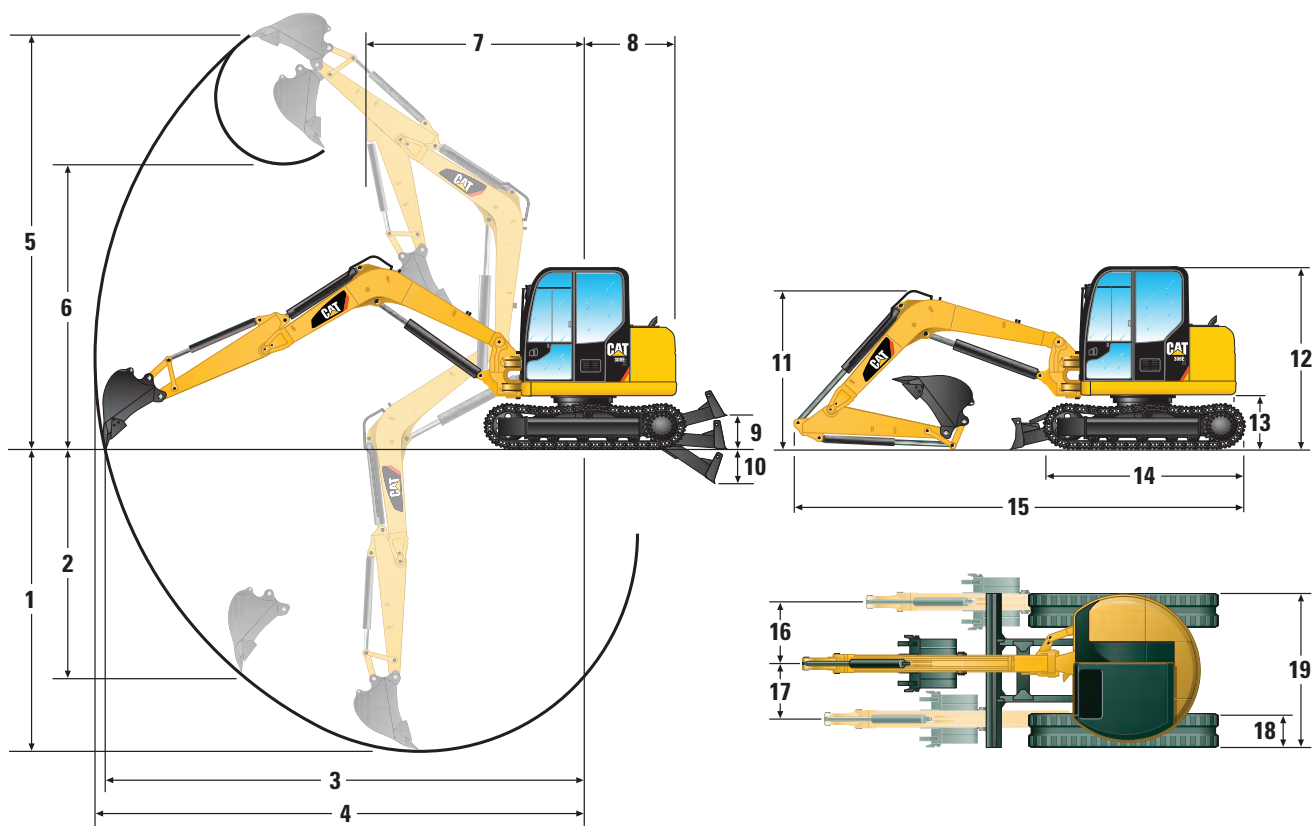

	Standard Stick		Long Stick	
<b>1</b>	4150 mm	13'7"	4690 mm	15'5"
<b>2</b>	2980 mm	9'9"	3550 mm	11'8"
<b>3</b>	6820 mm	22'9"	7350 mm	24'1"
<b>4</b>	7020 mm	23'0"	7540 mm	24'9"
<b>5</b>	6640 mm	21'9"	6990 mm	22'11"
<b>6</b>	4670 mm	15'4"	5010 mm	16'5"
<b>7</b>	2800 mm	9'2"	3280 mm	10'9"
<b>8</b>	1450 mm	4'9"	1450 mm	4'9"
<b>9</b>	420 mm	1'5"	420 mm	1'5"
<b>10</b>	320 mm	1'1"	320 mm	1'1"

	Standard Stick		Long Stick	
<b>11</b>	2280 mm	7'6"	2230 mm	7'4"
<b>12</b>	2550 mm	8'4"	2550 mm	8'4"
<b>13</b>	735 mm	2'5"	735 mm	2'5"
<b>14</b>	2903 mm	9'6"	2903 mm	9'6"
<b>15</b>	6380 mm	20'11"	6340 mm	20'10"
<b>16</b>	1010 mm	3'4"	1010 mm	3'4"
<b>17</b>	635 mm	2'1"	635 mm	2'1"
<b>18</b>	450 mm	1'6"	450 mm	1'6"
<b>19</b>	2320 mm	7'7"	2320 mm	7'7"

## Lift Capacities at Ground Level\*

Lift Point Radius		4000 mm (13'1")		6050 mm (19'10")	
		Front	Side	Front	Side
Blade Down	kg	3650	1710	1880	920
	lb	8,046	3,770	4,144	2,028
Blade Up	kg	1840	1530	970	820
	lb	4,056	3,373	2,138	1,808

\* The above loads are consistent with hydraulic excavator lift capacity rating standard ISO 10567:2007 and they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. The excavator bucket weight is not included on this chart. Lifting capacities are for standard stick.