

MD6420

Rotary Blasthole Drill



10 Meter Mast Configuration

Hole diameter	Up to 311 mm	Up to 12.25 in
Depth single pass	Up to 10.29 m	Up to 33 ft 9 in
Depth multi-pass	Up to 63.40 m	Up to 208 ft

Operating Temperature

Minimum ambient rating (standard)	-28° C	-20° F
Maximum ambient rating (standard)	52° C	125° F
Altitude	Up to 4572 m	Up to 15,000 ft

Pull-down/Hoisting Capacity

Bit Load (10 m)	41 347 kg	91,152 lb
Pull-down capacity	Up to 383 kN	Up to 86,000 lbf
Hoist capacity	Up to 383 kN	Up to 86,000 lbf
Drilling feed rate	0-33.5 m/min	0-110 ft/min
Retract rate	0-33.5 m/min	0-110 ft/min
Head travel	12.2 m	480 in

Rotary Drive System

Torque	0-15 185 N·m	0-11, 200 lbf-ft
Horsepower capacity	216 kW	290 hp

Compressor (Standard)

Type	Oil-flooded, single-stage screw	
Discharge air flow (sea level)	56.6 m ³ /min	2,000 ft ³ /min
Maximum operating pressure	6.9 bar	100 psi

Compressor (Optional)

Type	Oil-flooded, single-stage screw	
Discharge air flow (sea level)	67.9 m ³ /min	2,400 ft ³ /min
Maximum operating pressure	6.9 bar	100 psi

Type (high-pressure)	Oil-flooded, two-stage screw	
Discharge air flow (sea level)	42.5 m ³ /min	1,500 ft ³ /min
Maximum operating pressure	10.3/24.1 bar	150/350 psi

Type (high-pressure)	Oil-flooded, two-stage screw	
Discharge air flow (sea level)	42.5 m ³ /min	1,500 ft ³ /min
Maximum operating pressure	10.3/24.1/ 34.4 bar	150/350/ 500 psi

MD6420 Rotary Blasthole Drill Specifications

Engine (Standard)

Manufacturer	Caterpillar	
Model	C27 Tier 2	
Rated horsepower	597 kW	800 hp
Full load	2,100 rpm	
Fuel tank	1514 L	400 gal
Optional	1703 L	450 gal

Engine (Optional)

Manufacturer	Cummins	
Model	QST-30	
Rated horsepower	(Non-Cert) 634 and 783 kW (850 and 1,050 hp) (Tier 2) 783 kW (1,050 hp)	
Full load	2,100 rpm	
Fuel tank	1514 L	400 gal
optional	1703 L	450 gal

Engine (Optional)

Manufacturer	Caterpillar	
Model	C27 (Tier 2)	
Rated horsepower	634 kW	875 hp
Full load	2,100 rpm	
Fuel tank	1514 L	400 gal
Optional	1703 L	450 gal

Operator's Cab

Location	To the right from the mast if facing rear deck from the rear end	
Type	Shock-mounted; two-man, integrated FOPS certified	
Floor area	3 m ²	32.40 ft ²
Height inside	1943 mm	76.50 in
Windows (tinted safety glass in rubber mounting)	6.4 mm	0.25 in
Number of windows	10	
Number of doors	2 with windows (included in above)	
Operator's seat	One swivel-type with armrests, headrest and retractable seat belt	
Helper's seat	Fixed folding jump seat	
Climate control	Wall-mounted, AC/heating/pressurizing unit	
Other	Window wipers and washers	

Undercarriage

Number of rollers on each side	13	
Rock guards/chain guards	Standard full-length guards	
Drive horsepower per track – maximum	216 kW	290 hp
Brakes	Spring set, hydraulic release	
Brake release	Automatic	
Tram speed maximum	2.14 km/h	1.33 mph
Gradeability mast down	17%	
Front	Three-point oscillating type	
Track adjustment means	Hydraulic with grease gun	
Track drive disconnect	Standard (manual)	

Mainframe, Decks and Walkways

Jacks, mast pivot and deck	Welded integrally to mainframe	
Tool box	Lockable door	
Machine deck	Access both sides	
Tow hooks	Welded, two (2) front	

Leveling Jacks

Number	4	
Location	2 front, 2 rear	
Pad diameter		
Non-drill end	762 mm	30 in
Drill end	914 mm	36 in

Drill Table and Work Deck

Table height off ground	1448 mm	57 in
Wide walkways	Around the drill deck	
Viewing hatch	In the rear deck; hydraulically operated from the cab	

Dust Curtain

(Optional Hydraulic Lifters, Front and Rear)

MD6420 Rotary Blasthole Drill Specifications

Accessories, Tools and Handling Equipment

Drill Pipe (optional)

Diameter	178 mm	7.0 in
	194 mm	7.625 in
	219 mm	8.625 in
Wall thickness	25 mm	1 in
Length	10.67 m	35 ft
Threads	Depends on pipe outside diameter	

Diameter	Wall Thickness	Thread	Pipe Length
178 mm (7.0 in)	25 mm (1 in)	4.25 Beco	10.67 m (35 ft)
184 mm (7.625 in)	25 mm (1 in)	6 Beco	10.67 m (35 ft)
219 mm (8.625 in)	25 mm (1 in)	6 Beco	10.67 m (35 ft)

Top Adaptor Sub

Diameter	Depends on pipe diameter	
Wall thickness	25 mm	1 in
Length	914 mm	36 in
Top thread – API reg.	140 mm	5.5 in
Bottom thread	Depends on pipe diameter	

Bit Sub

Diameter	Depends on pipe diameter	
Wall thickness	25 mm	1 in
Length	762 mm	30 in
Top thread	Depends on pipe diameter	
Bottom thread	Depends on bit diameter	
Table bushing	Roller-type or two-piece with replaceable liner	

Accessories, Tools and Handling Equipment (continued)

Pipe Rack (Inside the Mast)

Type	Carousel, with stationary pods and breaker plates	
Size of drill pipe		
5 pipes	178 mm	7.0 in
	194 mm	7.625 in
	219 mm	8.625 in
Length of drill	10.67 m	35 ft
Pipe rack swing	Hydraulic cylinders (2)	
Pipe rack index	Hydraulic cylinder with locking pin	


Winch

Rating	1587 kg	3,500 lb
Cable size	13 mm	0.5 in

MD6420 Rotary Blasthole Drill Specifications

Dimensions

All dimensions are approximate.

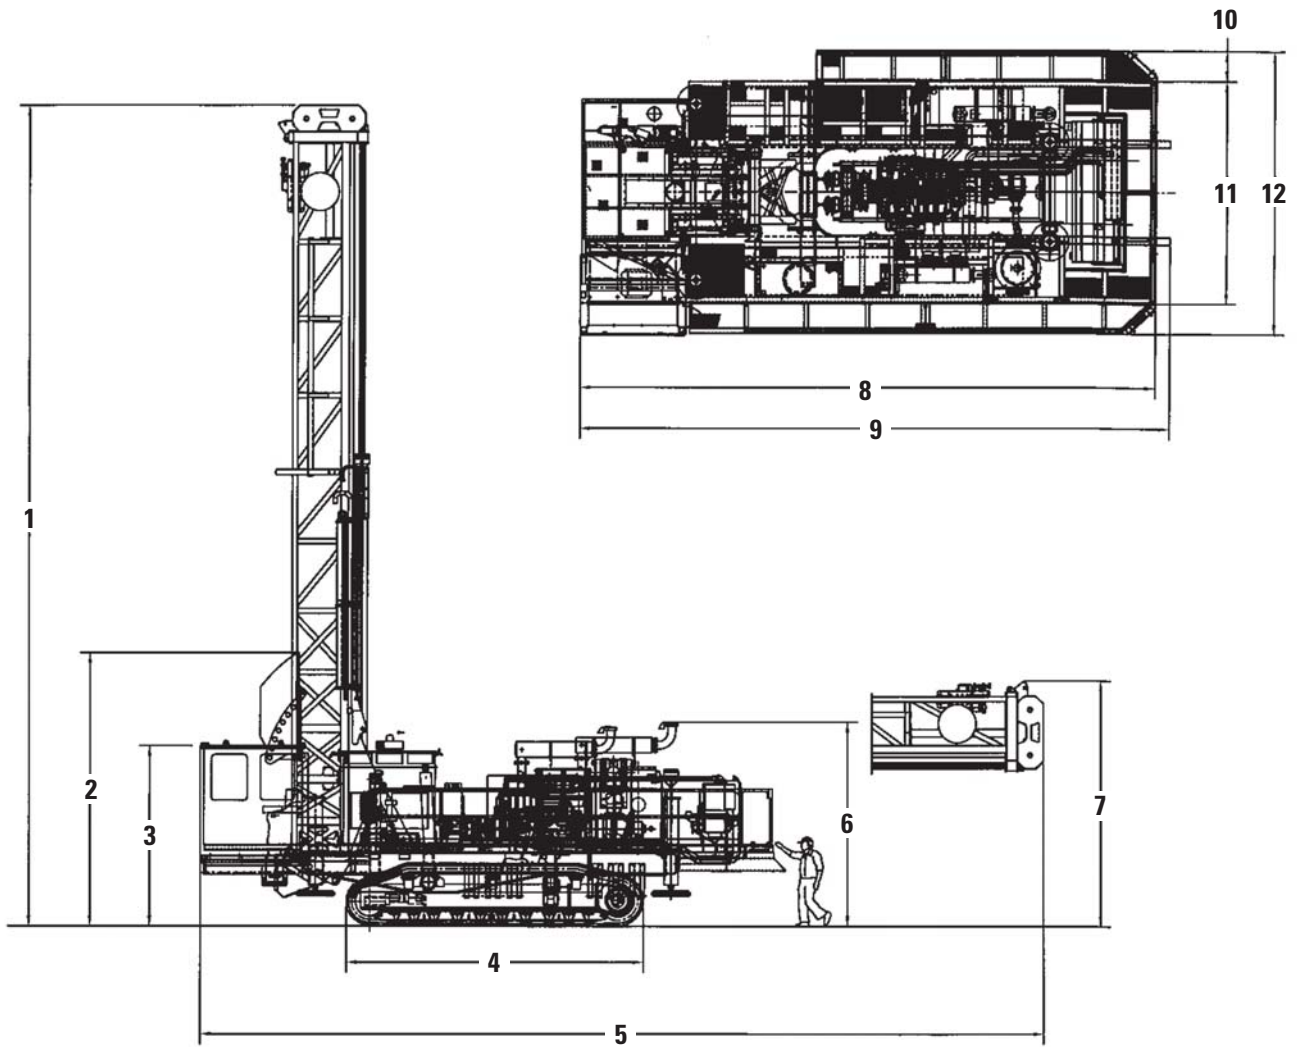

1	16.31 m	642.19 in	7	4.89 m	192.44 in
2	5.44 m	214.32 in	8	11.46 m	451.33 in
3	3.59 m	141.28 in	9	11.73 m	461.89 in
4	5.95 m	234.71 in	10	0.60 m	23.63 in
5	16.88 m	664.65 in	11	4.43 m	174.37 in
6	4.06 m	160.00 in	12	5.63 m	221.62 in

MD6420 Rotary Blasthole Drill Standard Equipment

Standard Equipment

The MD6420 with 10 meter mast arrangement, crawler-mounted blasthole drills are designed to drill up to 311 mm (12¼ in) diameter holes with rated pulldown and hoist capacity up to 39 009 kg (86,000 lb).

ENGINE

- Metal turbo and exhaust manifold covers
- Engine pre-lube
- Additional filtration
- Coolant conditioner

MAST

- Up to 311 mm (12¼ in) hole diameter
- Up to 39 009 kg (86,000 lb) rated capacity single cylinder pulldown/hoist system
- Up to 41 347 kg (91,152 lb) bit load with one pipe in the drill string
- Patented HOBBO (Hydraulically Operated Break Out) wrench operated from the cab
- 30 degree angle drilling package and mast locks and lock/unlock indicator in cab
- Winch system 1587 kg (3,500 lb) capacity

TOP DRIVE

- Two (2) motors
- Rotation speed 0-137 rpm
- Torque up to 15 185 N·m (11,200 lbf-ft)

OPERATOR'S CAB

- Integrated FOPS
- Totally enclosed, insulated, two-man cab
- Two (2) hinged doors with heavy duty freezer type door latch system
- Ten (10) windows (safety glass, tinted)
- Windshield wiper and washer kit
- Ergonomic operator's console with full instrumentation
- Ergonomic operator's seat with head and arm rests, retractable seat belt, air suspension mount
- Electric over hydraulic drill functions
- Auxiliary functions operated by fingertip toggle switches
- More than 3 m² (32.4 ft²) of floor space
- Excellent visibility
- dB(A) rating of 80 or less
- Wall mounted air conditioner/heater/pressurizer, belt driven
- Rubber shock-mounts to absorb vibration
- Electric horn operated by push button in the cab

UNDERCARRIAGE

- Crawler mounted, excavator type
- 750 mm (29.5 in) triple grousers
- Full length chain guides/rock guards

MAINFRAME, DECKS AND WALKWAYS

- Rear deck is stationary during both angle and vertical drilling modes
- Viewing hatch in rear deck, hydraulically operated from cab to help with spotting holes
- Walkway around the cab
- Wide access ladder with platform in front of the cab
- Four (4) hydraulic leveling jacks (122 cm/48 in)
- Centralized lubrication system
- Total 3217 L (850 gal) fuel tanks with isolation valves
- 4 × 8D maintenance free batteries

CAROUSEL

- Hydraulically operated from the cab
- No moveable parts
- Automatic indexing

COOLING (SINGLE, FRONT-END MOUNTED)

- Maximum ambient cooling capacity of 52° C (125° F)

HYDRAULIC SYSTEM

- Two (2) variable displacement axial piston pumps, in closed loop, that operate the drill rotation pulldown/hoist and tram
- Two (2) high pressure gear pumps, in open loop, for all auxiliary functions
- Double pump drive
- Fan circuit pump
- Dual filtration

DRILL ACCESSORIES (TRICONE/ROTARY)

- Top sub adaptor
- Roller deck bushing
- Bit sub (76 cm/30 in S-S)
- Horseshoe bushing
- Bit basket
- Lifting bail
- Auto tool wrench (deck wrench)

DUST SYSTEM

- See Optional Equipment and select the required system

PAINT

- Standard Caterpillar colors

MISCELLANEOUS

- Backup alarm
- Filter kit for 50-hour preventive maintenance.
- Seven (7) 60-watt LED lights for night drilling
- Side walkways and handrails with side boarding ladder
- Outside cab platform for easy access
- Tool box, mounted under walkway (tools not included)
- Lift lugs
- Towing hooks (front end)
- Battery disconnect

MD6420 Rotary Blasthole Drill Mandatory Attachments

Mandatory Attachments (Installed at Factory)

Select one from each group. Mandatory attachments may vary. Consult your Cat® dealer for specifics.

ENGINE/COMPRESSOR (must select one)

- MD6420W-1
 - Cat electronic diesel engine C27, Tier 2, 597 kW (800 hp) @ 2,100 rpm with NC single stage Sullair compressor 56.6 m³/min @ 6.9 bar (2,000 ft³/min @ 100 psi)
- MD6420W-4
 - Cat electronic diesel engine model C27, Tier 2, 652 kW (875 hp) @ 2,100 rpm with two stage Sullair compressor 42.5 m³/min @ 10.3/24.1 bar (1,500 ft³/min @ 150/350 psi)
 - Front end coolers
- MD6420W-5
 - Cummins QST-30C electronic diesel engine (jacket water), 783 kW (1,050 hp) @ 2,100 rpm with single stage Sullair compressor 67.9 m³/min @ 6.9 bar (2,400 ft³/min @ 100 psi)
 - Split coolers
- MD6420W-6
 - Cummins QST-30 electronic diesel engine Tier 2 (air-to-air), 783 kW (1,050 hp) @ 2,100 rpm with single stage Sullair compressor 67.9 m³/min @ 6.9 bar (2,400 ft³/min @ 100 psi)
 - Split coolers
- MD6420W-7
 - Cummins QST-30C electronic diesel engine (jacket water), 783 kW (1,050 hp) @ 2,100 rpm with two stage Sullair compressor 42.5 m³/min @ 10.3/34.4 bar (1,500 ft³/min @ 150/500 psi)
 - Split coolers (outside U.S.A., Canada, EU)
- MD6420W-8
 - Cummins QST-30 electronic diesel engine Tier 2 (air-to-air), 783 kW (1,050 hp) @ 2,100 rpm with two stage Sullair compressor 42.5 m³/min @ 10.3/34.4 bar (1,500 ft³/min @ 150/500 psi)
 - Split coolers

MAST/CAROUSEL GROUP (must select one)

- MD6420W-93
 - Mast: Up to 10.29 m (33'9") single pass hole depth, drill on tracks, changing bit above deck
 - Five (5) pipe capacity carousel allowing 63.4 m (208') total hole depth with 178 mm (7 in) diameter × 10.67 m (35 ft) S-S drill pipe (drill pipe not included)
- MD6420W-9
 - Mast: Up to 10.29 m (33'9") single pass hole depth, drill on tracks, changing bit above deck
 - Five (5) pipe capacity carousel allowing 63.4 m (208 ft) total hole depth with 194 mm (7⁷/₈ in) diameter × 10.67 m (35 ft) S-S drill pipe (drill pipe not included)
- MD6420W-10
 - Mast: Up to 10.29 m (33'9") single pass hole depth, drill on tracks, changing bit above deck
 - Five (5) pipe capacity carousel allowing 63.4 m (208 ft) total hole depth with 219 mm (8⁵/₈ in) diameter × 10.67 m (35 ft) S-S drill pipe (drill pipe not included)

MD6420 Rotary Blasthole Drill Optional Attachments

Optional Attachments (Installed at Factory)

Optional attachments may vary. Consult your Cat dealer for details.

DRILLING ACCESSORIES KIT FOR HAMMER DRILLING (in lieu of rotary drill accessories)

- Heavy duty shock sub and adapter, bit sub, two-piece table bushing, horseshoe bushing, lifting ball, bit basket, 113.5 L/30 gal hammer oil injection system

DUST COLLECTION OPTIONS

- Dust Collector 4500 Series
- Water injection system for dust suppression with 1374 L (363 gal) tank mounted below front deck
- Water injection system with 2271 L (600 gal) tank mounted on the top-deck (mounted in place of Dry Dust Collector)

Note: Dry Dust Collector and Water Injection on the same drill can be selected only with below deck tanks.

DRILLING

- Drill pipe (see Drill Pipe Price List)
- Two-piece split bushing
- Rotary head RPM gauge, digital
- Rotary torque control
- Rotation speed 0-173 rpm
- Rotary/hammer shock sub
- Rock oiler injection system (for Tricone); 113.56 L (30 gal)
- Pipe guide roller assembly mounted on drill deck
- Dual purpose carousel (hammer – Tricone pipe rack/4-pod only)

FLUIDS

- Fast fill fuel only
- Fast fill full service center (fuel, hydraulic oil, coolant, engine oil)
- Automatic lubrication system
- Drilling pipe thread lube system, activated from inside the cab

SYSTEM PROTECTION

- Additional loop filters between pumps and motors
- Hydraulic diagnostic test station
- Engine mounted stop
- Ground level engine shutdown
- Rotating beacons (one on mast crown, one on cab, one on front-end)

COLD WEATHER AIDS

- Diesel fired heating system (self-contained heater for engine coolant, water, hydraulic oil, fuel) – runs during engine operation
- Cab floor heater (electric fan with heater core utilizing engine coolant)

INDICATOR SYSTEMS

- Jack retract indicators
- Tram interlock, jacks (includes indicator)
- Tram interlock, head-position
- Pipe rack interlock
- Filter indicators, centrally mounted in cab (hydraulic, compressor, air intake)

MISCELLANEOUS

- Additional fuel tank 1374 liter (363 gal), under front end
- 24 to 12 volt converter
- Extra lighting package (five additional 60 watt LED lights)
- Blowdown hose with nozzle
- Hydraulic rear dust curtain lifting system
- Hydraulic front dust curtain lifting system
- Closed circuit camera system with two cameras for front and rear mounting and a monitor in cab
- Radio AM/FM, CD player and USB port for iPod
- Radio CB with antenna
- XIR cab glass upgrade
- Thermal double-pane glass upgrade
- Cab window shades
- Remote jump start terminals
- Main drill window cage
- Lanyard attachment – cable with traveling hook on mast, and personnel harness
- Tram remote control (pendant/cable) for operation of tram controls from ground
- Winch remote control (pendant/cable) for operation of winch while on rear deck
- 24V to 110V or 220V AC inverter
- 152 cm (60 in) leveling jacks (front end only)
- Jib crane with pedestal control mounted on rear deck
- Mechanical tool kit (reference TV014590)
- Three-point harness kit for operator's seat
- Water injection flow meter
- Cab manometer
- Extreme hot weather lubricant upgrade (compressor oil)
- Extreme hot weather lubricant upgrade (hydraulic oil)
- Basic engine shut down timer
- Cat EMS panel with Engine Data Link Connector
- Mirror kit (includes three bolt-on mirrors)
- Slope indicator mounted in cab to indicate forward and lateral angle
- Hydraulic oil temperature gauge mounted in dash
- Document holder mounted inside the cab

MD6420 Rotary Blasthole Drill

Materials and specifications are subject to change without notice.

Featured machines in photos may include additional equipment.

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com.

© 2015 Caterpillar
All Rights Reserved.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Product ID: MD6420

AEHQ6542-02
Replaces AEHQ6542-01

January 2015

