

# PAVING PRODUCT LINE





# VIBRATORY SOIL COMPACTORS

Cat® vibratory soil compactors are durable and reliable. They offer high compaction performance, speed and gradeability to maximize productivity on a wide range of applications.

MODEL	DRUM TYPE	EMISSIONS	ENGINE POWER	OPERATING WEIGHT WITH CAB	COMPACTION WIDTH
CS5	Smooth	Tier 4 Final	55.5 kW (74.4 hp)	4445 kg (9,800 lb)*	1270 mm (50 in)
CP5	Padfoot	Tier 4 Final	55.5 kW (74.4 hp)	4675 kg (10,307 lb)*	1270 mm (50 in)
CS7	Smooth	Tier 4 Final, EU Stage V	74.4 kW (99.8 hp)	7383 kg (16,276 lb)	1676 mm (66 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	74.5 kW (99.9 hp)	7210 kg (15,895 lb)	
CP7	Padfoot	Tier 4 Final, EU Stage V	74.4 kW (99.8 hp)	7707 kg (16,990 lb)	1676 mm (66 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	74.5 kW (99.9 hp)	7471 kg (16,471 lb)	
CS10 GC	Smooth	Tier 4 Final, EU Stage V, Korea Stage V	90 kW (121 hp)	10 494 kg (23,136 lb)	2134 mm (84 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	83 kW (111.3 hp)	10 492 kg (23,131 lb)	
CS11	Smooth	Tier 4 Final	97.9 kW (131.3 hp)	10 806 kg (23,823 lb)	2134 mm (84 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	96.5 kW (129.4 hp)	10 806 kg (23,823 lb)	
CS11 GC	Smooth	Tier 4 Final, EU Stage V, Korea Stage V, Japan 2014	90 kW (120.7 hp)	11 238 kg (24,775 lb)	2134 mm (84 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	83 kW (111.3 hp)	11 235 kg (24,769 lb)	
CP11 GC	Padfoot	Tier 4 Final, EU Stage V, Korea Stage V	90 kW (121 hp)	11 389 kg (25,109 lb)	2134 mm (84 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	83 kW (111.3 hp)	11 387 kg (25,104 lb)	
CP11	Padfoot	Tier 4 Final	97.9 kW (131.3 hp)	11 383 kg (25,095 lb)	2134 mm (84 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	96.5 kW (129.4 hp)	11 383 kg (25,095 lb)	
CS12	Smooth	Tier 4 Final, Japan 2014	117 kW (156.9 hp)	11 500 kg (25,353 lb)	2134 mm (84 in)
		EU Stage V	117 kW (156.9 hp)	11 953 kg (26,351 lb)	
		Tier 3 / EU Stage IIIA equivalent	116.1 kW (155.7 hp)	11 743 kg (25,889 lb)	
CP12	Padfoot	Tier 4 Final	117 kW (156.9 hp)	11 914 kg (26,266 lb)	2134 mm (84 in)
		EU Stage V	117 kW (156.9 hp)	12 261 kg (27,030 lb)	
		Tier 3 / EU Stage IIIA equivalent	116.1 kW (155.7 hp)	11 914 kg (26,266 lb)	

\* Operating weight listed with ROPS/FOPS canopy. Not available in a cab configuration.

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat® dealer or visit [www.cat.com](http://www.cat.com).

hp = Imperial horsepower





MODEL	DRUM TYPE	EMISSIONS	ENGINE POWER	OPERATING WEIGHT WITH CAB	COMPACTION WIDTH
<b>CS13 GC</b>	Smooth	Tier 4 Final, EU Stage V, Korea Stage V	90 kW (121 hp)	12 655 kg (27,900 lb)	2134 mm (84 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	83 kW (111.3 hp)	12 653 kg (27,895 kg)	
<b>CP13 GC</b>	Padfoot	Tier 4 Final, EU Stage V, Korea Stage V	90 kW (121 hp)	12 641 kg (27,869 lb)	2134 mm (84 in)
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	83 kW (111.3 hp)	12 485 kg (27,524 lb)	
<b>CS13</b>	Smooth	EU Stage V	117 kW (156.9 hp)	12 791 kg (28,199 lb)	2134 mm (84 in)
<b>CS14</b>	Smooth	Tier 4 Final	117 kW (156.9 hp)	14 245 kg (31,405 lb)	2134 mm (84 in)
		EU Stage V	117 kW (156.9 hp)	14 336 kg (31,605 lb)	
<b>CP14</b>	Padfoot	Tier 3 / EU Stage IIIA equivalent	116.1 kW (155.7 hp)	14 245 kg (31,405 lb)	2134 mm (84 in)
		Tier 4 Final	117 kW (156.9 hp)	14 607 kg (32,203 lb)	
<b>CS16</b>	Smooth	EU Stage V	129.4 kW (173.5 hp)	16 143 kg (35,589 lb)	2134 mm (84 in)
		Tier 3 / EU Stage IIIA equivalent	129 kW (173 hp)	15 999 kg (35,272 lb)	
<b>CP16</b>	Padfoot	Tier 4 Final	129.4 kW (173.5 hp)	16 506 kg (36,390 lb)	2134 mm (84 in)
		EU Stage V	129 kW (173 hp)	16 339 kg (36,022 lb)	
<b>CS17</b>	Smooth	Tier 3 / EU Stage IIIA equivalent	129 kW (173 hp)	16 506 kg (36,390 lb)	2134 mm (84 in)
<b>CP17</b>	Padfoot	EU Stage V	129.4 kW (173.5 hp)	17 420 kg (38,405 lb)	2134 mm (84 in)
<b>CS19</b>	Smooth	Tier 3 / EU Stage IIIA equivalent	129 kW (173 hp)	17 677 kg (38,971 lb)	2134 mm (84 in)
		Tier 4 Final, Japan 2014	129.4 kW (173.5 hp)	18 888 kg (41,641 lb)	
<b>CS20</b>	Smooth	EU Stage V	129.4 kW (173.5 hp)	18 888 kg (41,641 lb)	2134 mm (84 in)
		Tier 3 / EU Stage IIIA equivalent	129 kW (173 hp)	18 780 kg (41,403 lb)	
		Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	129 kW (173 hp)	20 220 kg (44,577 lb)	2134 mm (84 in)

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).

hp = Imperial horsepower



## WHEEL ASPHALT PAVERS

Cat pavers feature intuitive, accessible technologies, and quick-heating screeds. These features combined with local dealer support make Cat pavers a great investment.

MODEL	EMISSIONS	ENGINE POWER	TRACTOR WEIGHT	PAVING RANGE	MAXIMUM THROUGHPUT CAPACITY
AP300 <sup>1,2</sup>	EU Stage V, Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent, Tier 2 / EU Stage II equivalent	55 kW (74.8 hp)	6600 kg (14,550 lb)	1.75 m - 4.0 m (5 ft 9 in - 13 ft 1 in)	406 tonnes/h (447 tons/h)
AP400 <sup>1</sup>	Tier 4 Final	90 kW (120 hp)	10 581 kg (23,327 lb)	2.4 m - 6.1 m (8 ft - 20 ft)	774 tonnes/h (853 tons/h)
AP400 <sup>1,2</sup>	EU Stage V, Brazil MAR-1, UN ECE R96 Stage IIIA, Tier 3 / EU Stage IIIA equivalent		11 256 kg (24,819 lb)	2.4 m - 6 m (8 ft - 19 ft 8 in)	
AP500 <sup>1</sup>	Tier 4 Final	110 kW (148 hp)	11 481 kg (25,311 lb)	2.4 m - 6.2 m (8 ft - 20 ft 6 in)	1000 tonnes/h (1,100 tons/h)
AP500 <sup>1,2</sup>	EU Stage V Brazil MAR-1, UN ECE R96 Stage IIIA, Tier 3 / EU Stage IIIA equivalent	110 kW (148 hp) 106 kW (142 hp)	12 026 kg (26,513 lb)	2.55 m - 6.77 m (8 ft 4 in - 22 ft 3 in)	
AP600 <sup>1,2</sup>	Tier 4 Final	129 kW (173 hp)	13 556 kg (29,391 lb)	2.44 m - 6.5 m (8 ft - 21 ft 4 in)	1300 tonnes/h (1,433 tons/h)
	EU Stage V, Korea Stage V	129 kW (173 hp)	14 018 kg (30,904 lb)	2.55 m - 8.0 m (8 ft 4 in - 26 ft 4 in)	
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	151 kW (202 hp)			
AP1000 <sup>1,2</sup>	Tier 4 Final	168 kW (225 hp)	15 526 kg (34,228 lb)	3.0 m - 7.8 m (10 ft - 25 ft 6 in)	1602 tonnes/h (1,766 tons/h)

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).

<sup>1</sup>Vibratory Screed  
<sup>2</sup>Tamper Bar Screed

hp = Imperial horsepower



# TRACK ASPHALT PAVERS


MODEL	EMISSIONS	ENGINE POWER	TRACTOR WEIGHT	PAVING RANGE	MAXIMUM THROUGHPUT CAPACITY
<b>AP355<sup>1,2</sup></b> <b>Mobil-Trac™</b>	Tier 4 Final, EU Stage V, Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent, Tier 2 / EU Stage II equivalent, China Off-Road Stage III	55 kW (74.8 hp)	7100 kg (16,094 lb)	1.75 m - 4.6 m (5 ft 9 in - 15 ft 1 in)	406 tonnes/h (447 tons/h)
<b>AP455<sup>1</sup></b> <b>Mobil-Trac</b>	Tier 4 Final		11 266 kg (24,837 lb)	2.4 m - 6.1 m (8 ft - 20 ft)	
<b>AP455<sup>1,2</sup></b> <b>Mobil-Trac</b>	EU Stage V, Brazil MAR-1, UN ECE R96 Stage IIIA, Tier 3 / EU Stage IIIA equivalent	90 kW (120 hp)	11 604 kg (25,582 lb)	2.4 m - 6 m (8 ft - 19 ft 8 in)	774 tonnes/h (853 tons/h)
<b>AP455<sup>2</sup></b> <b>Steel Track</b>			12 252 kg (27,011 lb)		
<b>AP555<sup>1</sup></b> <b>Mobil-Trac</b>	Tier 4 Final	110 kW (148 hp)	12 244 kg (26,993 lb)	2.4 m - 6.2 m (8 ft - 20 ft 6 in)	
<b>AP555<sup>1,2</sup></b> <b>Mobil-Trac</b>	EU Stage V Brazil MAR-1, UN ECE R96 Stage IIIA, Tier 3 / EU Stage IIIA equivalent	110 kW (148 hp) 106 kW (142 hp)	12 589 kg (27,754 lb)	2.55 m - 7.64 m (8 ft 4 in - 25 ft)	1000 tonnes/h (1,100 tons/h)
<b>AP555<sup>2</sup></b> <b>Steel Track</b>	EU Stage V Brazil MAR-1, UN ECE R96 Stage IIIA, Tier 3 / EU Stage IIIA equivalent	110 kW (148 hp) 106 kW (142 hp)	12 892 kg (28,422 lb)		
<b>AP655<sup>1,2</sup></b> <b>Mobil-Trac</b>	Tier 4 Final EU Stage V, China Nonroad Stage IV Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	129 kW (173 hp) 129 kW (173 hp) 151 kW (202 hp)	15,292 kg (33,730 lb) 15 754 kg (34,731 lb)	2.44 m - 6.5 m (8 ft - 21 ft 4 in) 2.55 m - 10 m (8 ft 4 in - 33 ft)	1300 tonnes/h (1,433 tons/h)
<b>AP655<sup>2</sup></b> <b>Steel Track</b>	EU Stage V Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	129 kW (173 hp) 151 kW (202 hp)	15 754 kg (34,731 lb)	2.55 m - 10 m (8 ft 4 in - 33 ft)	
<b>AP655 L<sup>2</sup></b> <b>Steel Track</b>	China Nonroad Stage IV	129 kW (173 hp)	17 154 kg (37,825 lb)	3.0 m - 10 m (10 ft - 33 ft)	
<b>AP1055<sup>1,2</sup></b> <b>Mobil-Trac</b>	Tier 4 Final, EU Stage V Tier 3 / EU Stage IIIA equivalent	168 kW (225 hp) 186 kW (249 hp)	16 691 kg (36,800 lb) 17 015 kg (37,513 lb)	3.0 m - 10 m (10 ft - 33 ft)	1602 tonnes/h (1,766 tons/h)

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).

<sup>1</sup>Vibratory Scream  
<sup>2</sup>Tamper Bar Scream

hp = Imperial horsepower



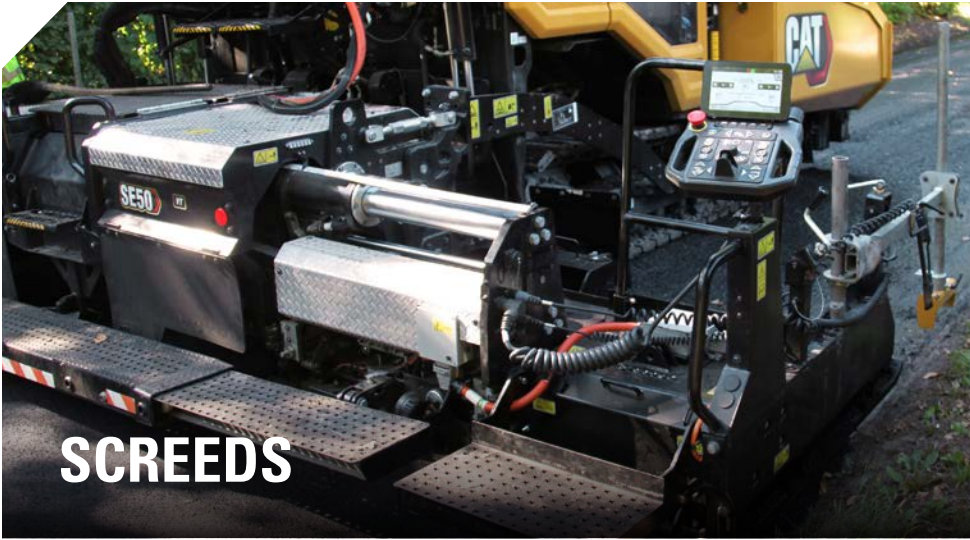

Cat screeds provide excellent durability, easy adjustment, and simple maintenance. Simple heating element replacement and machined screed frames facilitate quick service and reduce operating costs.

MODEL	PAVER COMPATIBILITY	WEIGHT	STANDARD PAVING RANGE	MAXIMUM PAVING WIDTH	MINIMUM PAVING WIDTH
<b>SE34 V</b> Vibratory	AP300, AP355	1400 kg (3,086 lb)	1.75 - 3.42 m (5 ft 9 in - 11 ft 2 in)	4.6 m (15 ft 1 in)	700 mm (27.5 in)
<b>SE34 VT</b> Tamper	AP300, AP355	1450 kg (3,196 lb)	1.75 - 3.42 m (5 ft 9 in - 11 ft 2 in)	4.6 m (15 ft 1 in)	700 mm (27.5 in)
<b>SE47 FM</b> Front-Mount (4B5)	AP400, AP455, AP500, AP555	2755 kg (6,073 lb)	2.44 m - 4.7 m (8 ft - 15 ft 6 in)	6.25 m (20 ft 6 in)	1.22 m (4 ft)
<b>SE47 FM</b> Front-Mount (411)	AP600, AP655	2812 kg (6,200 lb)			
<b>SE47 V</b> Vibratory	AP400, AP455, AP500, AP555	2654 kg (5,850 lb)	2.44 m - 4.7 m (8 ft - 15 ft 6 in)	6.1 m (20 ft)	1.22 m (4 ft)
<b>SE47 VT</b> Tamper	AP400, AP455, AP455 Steel Track, AP500, AP555, AP555 Steel Track	3050 kg (6,724 lb)	2.4 m - 4.68 m (7 ft 10 in - 15 ft 4 in)	6 m (19 ft 8 in)	1.18 m (3 ft 10 in)
<b>SE50 V</b> Vibratory	AP600, AP655	3284 kg (7,239 lb)	2.55 - 5 m (8 ft 4 in - 16 ft 4 in)	6.5 m (21 ft 4 in)	1.32 m (4 ft 4 in)
<b>SE50 VT</b> Tamper (A42)	AP500, AP555, AP555 Steel Track	3129 kg (6,898 lb)	2.55 - 5 m (8 ft 4 in - 16 ft 4 in)	7.64 m (25 ft)	1.32 m (4 ft 4 in)
<b>SE50 VT</b> Tamper (B86)	AP600, AP655, AP655 L	3295 kg (7,264 lb)			
<b>SE60 FM</b> Front-Mount	AP600, AP655, AP1000, AP1055	3538 kg (7,800 lb)	3.05 - 5.94 m (10 ft - 19 ft 6 in)	7.77 m (25 ft 6 in)	1.83 m (6 ft)
<b>SE60 V</b> Vibratory	AP600, AP655, AP1000, AP1055	3550 kg (7,826 lb)	3 - 6 m (9 ft 10 in - 19 ft 6 in)	7.65 m (25 ft)	1.78 m (5 ft 10 in)
<b>SE60 V XW</b> Vibratory	AP655, AP1000, AP1055	4225 kg (9,314 lb)	3 - 6 m (9 ft 10 in - 19 ft 6 in)	10 m (33 ft)	1.78 m (5 ft 10 in)
<b>SE60 VT XW</b> Tamper	AP655, AP655 L, AP1000, AP1055	4660 kg (10,273 lb)	3 - 6 m (9 ft 10 in - 19 ft 6 in)	10 m (33 ft)	1.78 m (5 ft 10 in)

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).

Cat tandem vibratory rollers are available in a range of sizes and configurations to meet any application. Large double-drum rollers are simple to set up for maximum compaction efficiency on any type of mix.



MODEL	EMISSIONS	ENGINE POWER	OPERATING WEIGHT	STANDARD COMPACTION WIDTH	MAXIMUM COMPACTION WIDTH
<b>CB7</b>	Tier 4 Final, EU Stage V	74.4 kW (100 hp)	8885 kg (19,588 lb)	1500 mm (59 in)	1670 mm (66 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent, China Stage III	82 kW (111.5 hp)	7990 kg (17,615 lb)		
<b>CB8</b>	Tier 4 Final, EU Stage V	74.4 kW (100 hp)	9335 kg (20,580 lb)	1700 mm (67 in)	1870 mm (73 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent, China Stage III	82 kW (111.5 hp)	8720 kg (19,224 lb)		
<b>CB10</b>	Tier 4 Final, EU Stage V	90 kW (120 hp)	10 095 kg (22,255 lb)	1700 mm (67 in)	1870 mm (73 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent, China Stage III	97 kW (131.8 hp)	9710 kg (21,407 lb)		
<b>CB13</b>	Tier 4 Final, Tier 3 / EU Stage IIIA equivalent	106 kW (142 hp)	12 900 kg (28,440 lb)	2000 mm (79 in)	2170 mm (85 in)
<b>CB15</b>	Tier 4 Final, Tier 3 / EU Stage IIIA equivalent	106 kW (142 hp)	13 535 kg (29,840 lb)	2130 mm (84 in)	2300 mm (90 in)
<b>CB16</b>	Tier 4 Final, Tier 3 / EU Stage IIIA equivalent	106 kW (142 hp)	14 950 kg (32,959 lb)	2130 mm (84 in)	2300 mm (90 in)

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).  
hp = Imperial horsepower



## UTILITY ROLLERS

Cat utility-sized asphalt compactors are easy to operate, simple to transport, and quick to service.

MODEL	EMISSIONS	ENGINE POWER	OPERATING WEIGHT	OPERATING WEIGHT WITH BALLAST	COMPACTION WIDTH
<b>CB1.7</b>	Tier 4 Final, EU Stage V	18.4 kW (24.7 hp)	1605 kg (3,538 lb)	–	900 mm (35 in)
<b>CB1.8</b>	Tier 4 Final, EU Stage V	18.4 kW (24.7 hp)	1735 kg (3,825 lb)	–	1000 mm (39 in)
<b>CB2.5</b>	Tier 4 Final, EU Stage V	36 kW (48.2 hp)	2521 kg (5,546 lb)	3021 kg (6,646 lb)	1000 mm (39 in)
<b>CB2.5 GC</b>	Tier 4 Final, EU Stage V, Brazil MAR-1	18.4 kW (24.7 hp)	2521 kg (5,546 lb)	3021 kg (6,646 lb)	1000 mm (39 in)
<b>CB2.7</b>	Tier 4 Final, EU Stage V	36 kW (48.2 hp)	2698 kg (5,936 lb)	3198 kg (7,036 lb)	1200 mm (47 in)
<b>CB2.7 GC</b>	Tier 4 Final, EU Stage V, Brazil MAR-1	18.4 kW (24.7 hp)	2698 kg (5,936 lb)	3198 kg (7,036 lb)	1200 mm (47 in)
<b>CB2.9</b>	Tier 4 Final, EU Stage V	36 kW (48.2 hp)	2916 kg (6,415 lb)	3416 kg (7,515 lb)	1300 mm (51 in)
<b>CB4.0</b>	Tier 4 Final, EU Stage V	36 kW (48.2 hp)	3623 kg (7,971 lb)	4315 kg (9,493 lb)	1300 mm (51 in)
	Brazil MAR-1, Tier 4 Interim / EU Stage IIIA equivalent	36.6 kW (49.1 hp)	3700 kg (8157 lb)	4313 kg (9,508 lb)	
<b>CB4.4</b>	Tier 4 Final, EU Stage V	36 kW (48.2 hp)	3801 kg (8,362 lb)	4493 kg (9,885 lb)	1400 mm (55 in)
	Brazil MAR-1, Tier 4 Interim / EU Stage IIIA equivalent	36.6 kW (49.1 hp)	3803 kg (8,385 lb)	4417 kg (9,738 lb)	
<b>CC2.7 Combi</b>	Tier 4 Final, EU Stage V	36 kW (48.2 hp)	2599 kg (5,718 lb)	2779 kg (6,114 lb)	1200 mm (47 in)
<b>CC2.7 GC Combi</b>	Tier 4 Final, EU Stage V, Brazil MAR-1	18.4 kW (24.7 hp)	2599 kg (5,718 lb)	2779 kg (6,114 lb)	1200 mm (47 in)
<b>CC4.0 Combi</b>	Tier 4 Final, EU Stage V	36 kW (48.2 hp)	3586 kg (7,889 lb)	3936 kg (8,659 lb)	1300 mm (51 in)
	Brazil MAR-1, Tier 4 Interim / EU Stage IIIA equivalent	36.3 kW (48.7 hp)	3378 kg (7,446 lb)	3792 kg (8,342 lb)	

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).

hp = Imperial horsepower



Cat pneumatic compactors offer a wide range of operating weights to meet specific application needs. Steel, sand, and water provide versatile ballast options.



## PNEUMATIC ROLLERS

MODEL	EMISSIONS	ENGINE POWER	MAXIMUM WEIGHT	COMPACTION WIDTH	MAXIMUM WEIGHT PER WHEEL
<b>CW12</b>	Tier 3, EU Stage IIIA, China Stage III	75 kW (100.5 hp)	9200 kg (20,282 lb)	2090 mm (82 in)	1260 kg (2,778 lb)
<b>CW16</b>	Tier 4 Final, EU Stage V, Tier 3 / EU Stage IIIA equivalent	75 kW (100.6 hp)	15 000 kg (33,000 lb)	1754 mm (69 in)	1670 kg (3,680 lb)
<b>CW34</b>	Tier 4 Final, EU Stage IV Tier 3 / EU Stage IIIA equivalent, China Stage III	98 kW (131 hp) 96.5 kW (129 hp)	27 000 kg (59,525 lb)	2090 mm (82 in)	3380 kg (7,452 lb)

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).  
hp = Imperial horsepower



Cat road reclaimers/soil stabilizers pulverize the asphalt layer and mix it with the underlying base or mix additives and aggregates into the soil to stabilize deteriorated roadways or soil for a strong base.

MODEL	EMISSIONS	GROSS POWER	MAXIMUM WEIGHT	CUTTING WIDTH
RM400	Tier 4 Final, EU Stage V, Korea Stage V	314 kW (421 hp)	26 164 kg (57,682 lb)	2438 mm (96 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	313 kW (419.7 hp)	25 960 kg (57,232 lb)	
RM500	Tier 4 Final, EU Stage V, Korea Stage V	407 kW (546 hp)	31 533 kg (69,518 lb)	2438 mm (96 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	406 kW (544.4 hp)	29 372 kg (64,753 lb)	
RM600	Tier 4 Final, EU Stage V, Korea Stage V	474 kW (636 hp)	36 302 kg (80,032 lb)	2438 mm (96 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	470 kW (630 hp)	35 958 kg (79,274 lb)	
RM800	Tier 4 Final, EU Stage V	568 kW (762 hp)	36 124 kg (79,640 lb)	2438 mm (96 in)
	Tier 2 / EU Stage II equivalent	576 kW (772 hp)	36 118 kg (79,627 lb)	

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).  
hp = Imperial horsepower

## ROTOR SELECTION GUIDE

ROTOR	RM400	RM500	RM600	RM800
Universal 16	•	•		
Universal 18*	•	•		
Combination	•	•		
Soil		•		
Spade*	•			
System K			•	•

\*Rotor is not available in all regions for this machine model. Please consult your local dealer for detailed rotor specifications and availability.

Cat cold planers remove worn or deteriorated pavement to a specified grade and slope, leaving a textured surface that can be immediately opened to traffic or overlaid with new asphalt. They can also remove entire road surfaces up to a depth of 330 mm (13 in).



MODEL	EMISSIONS	GROSS POWER	OPERATING WEIGHT	CUTTING WIDTH
PM310	Tier 4 Final, EU Stage V, Korea Stage V	256 kW (343 hp)	21 215 kg (46,770 lb)	1000 mm (39.4 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent		20 924 kg (46,131 lb)	
PM312	Tier 4 Final, EU Stage V, Korea Stage V	256 kW (343 hp)	21 503 kg (47,407 lb)	1225 mm (48.2 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent		21 213 kg (46,766 lb)	
PM313	Tier 4 Final, EU Stage V, Korea Stage V	256 kW (343 hp)	21 556 kg (47,522 lb)	1300 mm (51.2 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent		21 267 kg (46,886 lb)	
PM620	Tier 4 Final, EU Stage V, Korea Stage V, China Nonroad Stage IV	474 kW (636 hp)	33 330 kg (73,480 lb)	2010 mm (79 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	470 kW (630 hp)	33 115 kg (73,006 lb)	
PM622	Tier 4 Final, EU Stage V, Korea Stage V, China Nonroad Stage IV	474 kW (636 hp)	33 900 kg (74,737 lb)	2235 mm (88 in)
	Brazil MAR-1, Tier 3 / EU Stage IIIA equivalent	470 kW (630 hp)	33 685 kg (74,263 lb)	
PM820	Tier 4 Final, EU Stage V	601 kW (806 hp)	36 130 kg (79,653 lb)	2010 mm (79 in)
	Tier 2 / EU Stage II equivalent	576 kW (772.4 hp)		
PM822	Tier 4 Final, EU Stage V	601 kW (806 hp)	36 700 kg (80,910 lb)	2235 mm (88 in)
	Tier 2 / EU Stage II equivalent	576 kW (772.4 hp)		
PM825	Tier 4 Final, EU Stage V	601 kW (806 hp)	37 500 kg (82,673 lb)	2505 mm (98.6 in)
	Tier 2 / EU Stage II equivalent	576 kW (772.4 hp)		

Max cutting depth 330 mm (13 in).

PM310, PM312 and PM313 track undercarriage weights listed.

Weights are approximate. Options may vary by region. Some models are not offered in all areas. For availability and configurations, please contact your local Cat dealer or visit [www.cat.com](http://www.cat.com).

hp = Imperial horsepower



# CAT® PAVING RIGHT THERE WITH YOU



Every day brings new challenges and tight deadlines. You're not alone in tackling what lies ahead—we're at your side, just like always. With market-leading paving and construction equipment that helps you complete every job on time and on spec. Unmatched parts and dealer support that keeps you running efficiently. Real-world, hands-on training and resources that help your crew master the latest techniques and technologies. In an ever-changing industry, one thing remains the same: our commitment to be right there with you.

Find us online at [www.cat.com](http://www.cat.com)

 [facebook.com/CatPaving](https://facebook.com/CatPaving)

 [instagram.com/CatPaving](https://instagram.com/CatPaving)

 [youtube.com/CatPaving](https://youtube.com/CatPaving)



オフロド法2014年  
基準適合



For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2024 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

QEDQ1055-23 (03-2024)  
Global

