

Cat[®] CST115

GEARBOX



Specifications

Typical Application

Chain Type Longwall Machinery like Armored Face Conveyors (AFC)

Maximum Output Torque (for 3 sec) T_{max} [N·m]

KP-115 CST/P-115 CST 1 150 000 N·m 848,196 lb/ft

Rated Power P

Ratio i [-]	Rated Power P (n = 1,485 rpm)	Rated Power P (n = 1,782 rpm)
39	1800 kW	2,937 hp
46	1800 kW	2,480 hp

Dimensions

KP-115 CST

Length	3600 mm	141.6 in
Width	2029 mm	79.8 in
Height	1300 mm	51.1 in

P-115 CST

Length	2811 mm	110.6 in
Width	1400 mm	55.1 in
Height	1300 mm	51.1 in

Capacity

KP-115 CST

Oil Quantity	1300 L	212 gal
Gearbox Weight (without oil)	23 980 kg	52,851 lb

P-115 CST


Oil Quantity	700 L	132 gal
Gearbox Weight (without oil)	16 400 kg	36,145 lb

Requirements of Cooling Water

Required Cooling Water Quantity	90 L/min	23.8 gal/min
Maximum Water Inlet Temperature	25° C/298.15 K	77° F/298.15 K

Shaft Design

Input Shaft (cylindrical)	DIN 5480-W 140×4
Output Shaft with Internal Toothing	DIN 5480-N 360×10

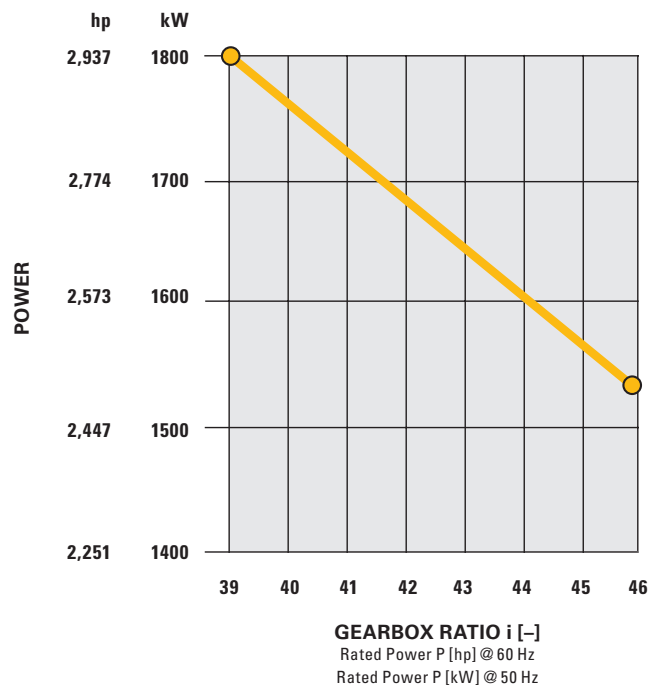

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2020 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ6880-02 (11-2020)
Replaces AEHQ6880-01

