

# 400 Series 404D-22G ElectropaK

32.7 kWm @ 3000 rpm

The Perkins® 400 Series engine family continues to set new standards in the compact engine market. Developed alongside customers to fulfill their needs in the generator set, compressor, agricultural and general industrial markets.

These new ElectropaKs provide compact power, from a robust family of 3 and 4 cylinder diesel engines designed to provide economic and durable operation at prime and standby duties, hitting the key power nodes required by the power generation industry.



## Emissions statement

Constant Speed Engines for use in Industrial, IOPU and ElectropaK applications: Certified against the requirements of EU Stage IIIA (Directives 97/68/EC, as last amended, for mobile applications).

Specification		
Number of cylinders	4 vertical in-line	
Bore and stroke	84 x 100 mm	3.3 x 3.9 in
Displacement	2.216 litres	135.2 in <sup>3</sup>
Aspiration	Naturally aspirated	
Cycle	4 stroke	
Combustion system	Indirect injection	
Compression ratio	23.3:1	
Rotation	Anti-clockwise, viewed on flywheel	
Total lubricating capacity	10.6 litres	2.8 US gal
Cooling system	Water cooled	
Total coolant capacity	7.0 litres	1.8 US gal

[www.perkins.com](http://www.perkins.com)

Photographs are for illustrative purposes only and may not reflect final specification.  
All information in this document is substantially correct at time of printing and may be altered subsequently.  
Final weight and dimensions will depend on completed specification.

Publication No. PN1912C/09/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins®**

THE HEART OF EVERY GREAT MACHINE

# 400 Series 404D-22G ElectropaK

32.7 kWm @ 3000 rpm

## Features and benefits

### Powered by your needs

- The 404D-22G ElectropaK is a powerful but quiet 2.2 litre naturally aspirated 4-cylinder compact package

### Compact, clean, efficient power

- Design features on the 400D range of ElectropaKs ensures clean rapid starting in all conditions whilst delivering impressive performance with low operating costs in a small, efficient package size

### Lower operating costs

- Approved for operation on biodiesel\* concentrations of up to 20%
- Oil and filter changes are 500 hours, dependent on load factor
- Engine durability and reliability, the warranty offering and ease of installation combine to drive down the cost of ownership

### Long-term power solution

- The 400D range of ElectropaKs has been designed to fully comply with stringent EU emissions regulations, providing an emissions compliant power solution for the future

### Product support

- With highly trained Perkins distributors in thousands of communities in over 180 countries, you are never far away from expert product knowledge, genuine parts and a range of advanced diagnostic technology for keeping your engine in peak condition
- To find your local distributor: [www.perkins.com/distributor](http://www.perkins.com/distributor)

\*Subject to conformance with ASTM D6751 and EN14214

[www.perkins.com](http://www.perkins.com)

Photographs are for illustrative purposes only and may not reflect final specification.  
All information in this document is substantially correct at time of printing and may be altered subsequently.  
Final weight and dimensions will depend on completed specification.

Publication No. PN1912C/09/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins**<sup>®</sup>

THE HEART OF EVERY GREAT MACHINE

# 400 Series 404D-22G Electropak

32.7 kWm @ 3000 rpm

## Technical information

### Air inlet

- Mounted air filter

### Fuel system

- Mechanically governed cassette type fuel injection pump
- Split element fuel filter

### Lubrication system

- Wet steel sump with filler and dipstick
- Spin-on full-flow lub oil filter

### Cooling system

- Thermostatically-controlled system with belt driven coolant pump and pusher fan
- Mounted radiator, piping and guards

### Electrical equipment

- 12 volt starter motor and 12 volt 65 amp alternator with DC output
- Oil pressure and coolant temperature switches
- 12 volt shut-off solenoid energised to run
- Glow plug cold start aid and heater/starter switch

### Flywheel and housing

- High inertia flywheel to SAE J620 Size 7½ Light
- Flywheel housing SAE 4 Short

### Mountings

- Front and rear engine mounting bracket

### Optional equipment

- Parts book

### Option groups

A selection of optional items is available to enable you to prepare a specification precisely matched to your needs.

[www.perkins.com](http://www.perkins.com)

Photographs are for illustrative purposes only and may not reflect final specification.  
All information in this document is substantially correct at time of printing and may be altered subsequently.  
Final weight and dimensions will depend on completed specification.


Publication No. PN1912C/09/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins**<sup>®</sup>

THE HEART OF EVERY GREAT MACHINE

# 400 Series 404D-22G Electropak

32.7 kWm @ 3000 rpm

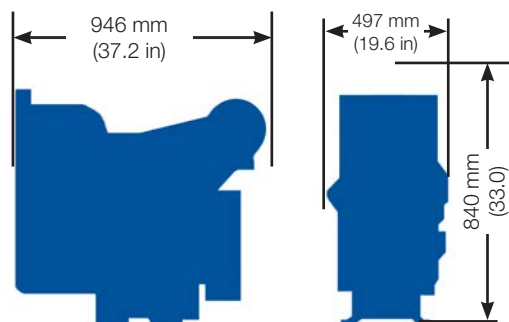

Engine package weights and dimensions

Engine package weights and dimensions		
Length	948 mm	37.3 in
Width	498 mm	19.6 in
Height	841 mm	33.1 in
Weight (dry)	242 kg	533 lb

[www.perkins.com](http://www.perkins.com)

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN1912C/09/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins**<sup>®</sup>

THE HEART OF EVERY GREAT MACHINE

# 400 Series 404D-22G Electropak

32.7 kWm @ 3000 rpm

Speed rpm	Type of operation	Typical generator output (Net)		Engine power				Low idle
				Gross		Net		
		kVA	kWe	kWm	hp	kWm	hp	
3000	Prime power	33.1	26.5	31.2	41.8	29.7	39.9	1600 ± 25
	Standby power	36.4	29.1	34.4	46.1	32.7	43.9	1600 ± 25

The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS 5514/1. **Derating** may be required for conditions outside these; consult Perkins Engines Company Limited.

Generator powers are typical and are based on typical alternator efficiencies and a power factor (cos  $\theta$ ) of 0.8. **Fuel specification:** BS 2869: Part 2 1998 Class A2 or ASTM D975 D2.

**Rating definitions:** Prime power: Power available at variable load in lieu of a main power network. Overload of 10% is permitted for 1 hour in every 12 hours operation. Standby (maximum): Power available at variable load in the event of a main power network failure. No overload is permitted.

Percent of prime power	Fuel consumption at 3000 rpm g/kWh	Fuel consumption at 3000 rpm l/hr
Standby power	235	6.9
Prime power	233	6.2
75%	240	4.8
50%	262	3.5

[www.perkins.com](http://www.perkins.com)

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN1912C/09/16 Produced in England ©2016 Perkins Engines Company Limited



THE HEART OF EVERY GREAT MACHINE