


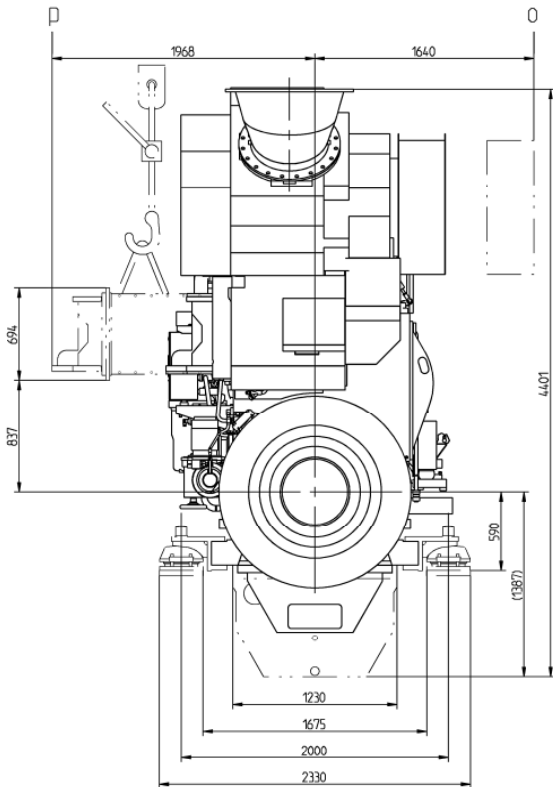


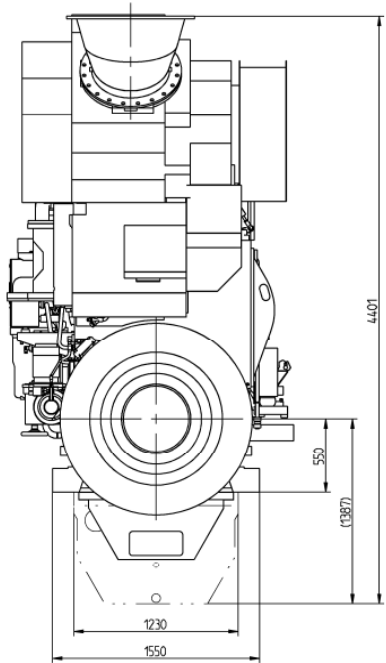



BEARING WET SUMP

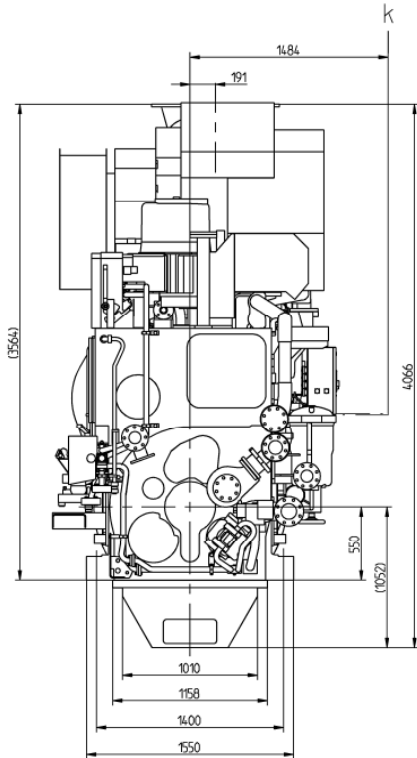

WET SUMP

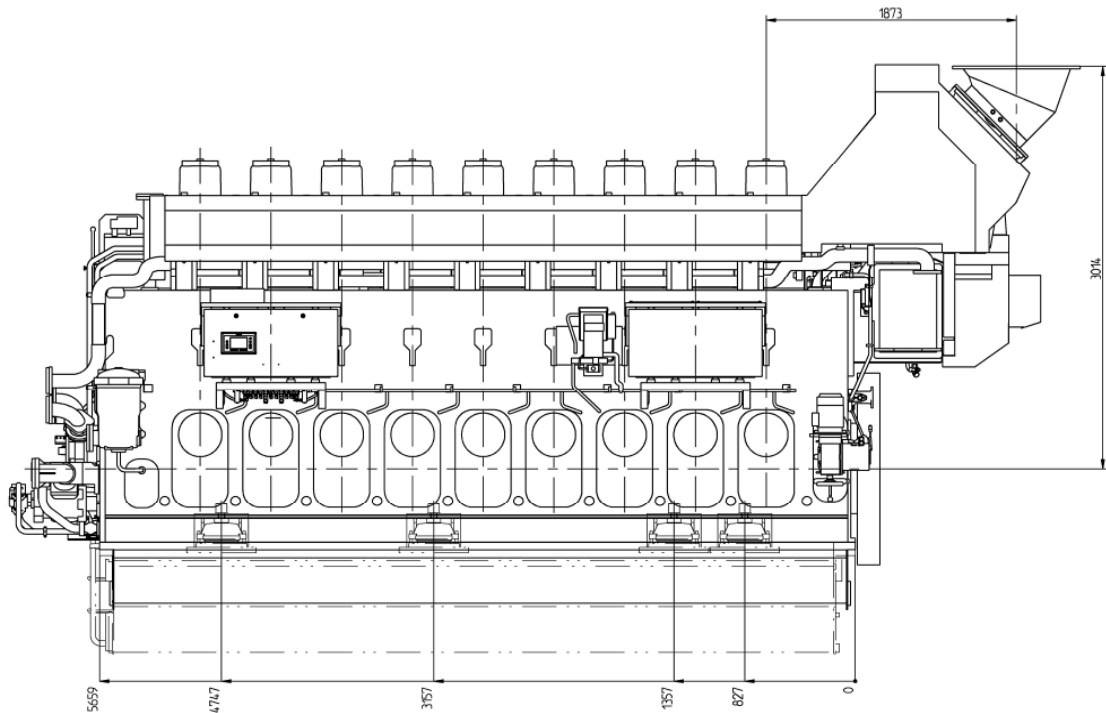

DRY SUMP

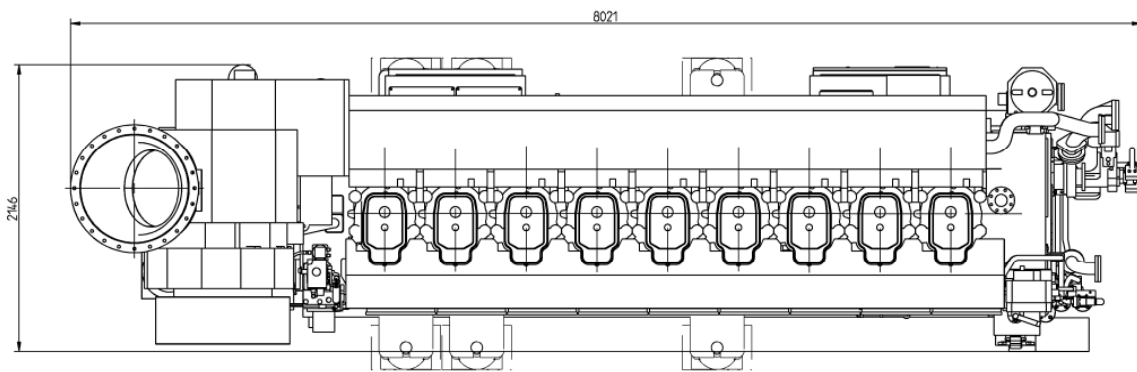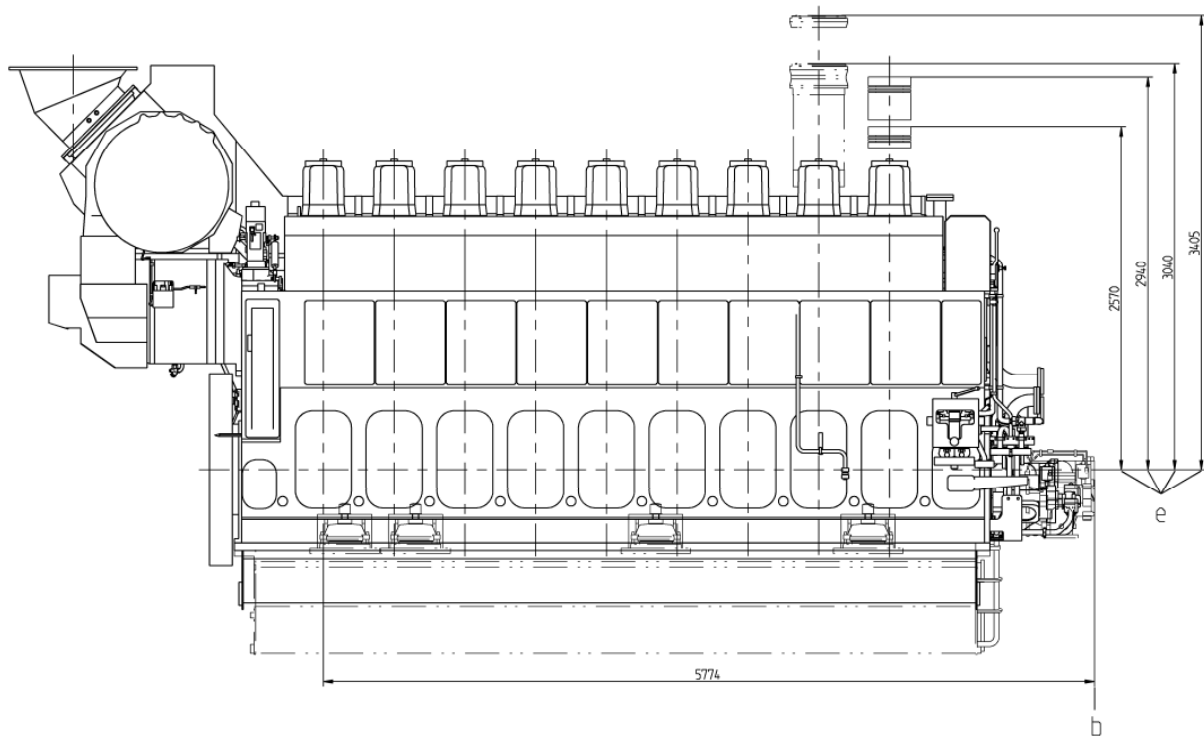

Anmerkung / REMARKS			
b SPACE REQUIRED FOR MEASURING TORSIONAL VIBRATIONS, AND/OR FOR REMOVAL OF THE VIBRATION DAMPER AND/OR LUBOIL PUMP			
e SPACE REQUIRED FOR REMOVAL OF PISTON AND CYLINDER LINER			
REDUCED REMOVAL HEIGHT FOR CYLINDER LINER 2940mm			
k SPACE REQUIRED FOR TERMINAL SET			
o SPACE REQUIRED FOR TURBOCHARGER SHAFT			
p SPACE REQUIRED FOR CHARGE AIR COOLER REMOVING			

Gewicht trocken mit flacher Ölwanne
WEIGHT DRY WITH DRY SUMP

CATERPILLAR MOTOREN GmbH & Co. KG RESERVES THE RIGHT TO
MODIFY AND AMEND DATA AT ANY TIME. ANY LIABILITY FOR
ACCURACY OF INFORMATION PROVIDED IS EXCLUDED.
WE WILL SUPPLY FURTHER BINDING DATA IN CONNECTION WITH A CORRESPONDING ORDER.

ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION
MAY BE REPRODUCED OR COPIED IN ANY FORM.
WITHOUT PRIOR WRITTEN PERMISSION OF CATERPILLAR MOTOREN GmbH & Co. KG.

CATERPILLAR		Modell 9M32E_FWS 1.3	
Zeichnung 9M32E_FWS 1.2		Gewicht (toll Weight (kg)	
Überflächen Surfaces	ISO 1802	Allgemeinskizzen General. Surfaces	ISO 2768 - mK
Drawings Contours	W 882	Verstärkung Material	1:20
Benennung Name		Motor - Einbauezeichnung ENGINE INSTALLATION DRAWING	
Änd.-Stand Change Level	—	Freigabe-Nr. Release No.	UKZ Doc Code
Zeichnungs-Nr. Drawing No.		Blatt Sheet	
9M32E FWS		1	