



FB15-2SA

Prime rating

Meets latest India CPCBI as per G.S.R 771(E) dated 11/12/2013 and its further amendments.

Meets CPCB / MOEF norms as per G.S.R 371(T) dated 17/05/2002 and its further amendments.



Genset Technical Data

Genset Rating (kVA)	15
No of Phases	1
Power Factor	0.8
Voltage (V)	230
Frequency (Hz)	50
Current (A)	65
Controller Type	SEDEMAC GC902
Starting System	12V / 90 AH
Genset Weight (kg)	825
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528)
Genset Dimensions (LxWxH) (mm)	1864X900X1371
Battery Type	Lead Acid
Circuit Breaker Rating (A)	80

Engine Technical Data

Engine Model	AL2CDG1
Engine Speed (rpm)	1500
Engine Volume (l)	1.92
Rated Power (kW)	12
No. of cylinder	2
Bore (mm)	104
Stroke (mm)	113
Compression Ratio	17.5 : 1
Aspiration	NA
Cooling System	Liquid Cooled
Cooling System Capacity (l)	8
Governing	Mechanical A1

Alternator Technical Data

Alternator Make	Leroy Somer
No of Bearings	1
Alternator model	LSAP 42.3 A
Alternator rating	15
Class of insulation	H
Coupling details	SAE 10
Voltage Variation (%)	1
Rated Full Load Current (A)	65

Fuel & Oil Systems Technical Data


Fuel System	Inline FIP
Type Of Fuel	Diesel
Genset Fuel Tank Capacity (l)	45
Fuel Consumption - @ 100% Load (l/hr)*	4.5
Fuel Consumption - @ 75% Load (l/hr)*	3.4
Fuel Consumption - @ 50% Load (l/hr)*	2.4
Fuel Consumption Tolerance	5%
Lube Oil change period (hrs)	600 Hrs. or 1 Year
Oil Type	15W40
Oil Capacity (l)	6.5
Oil Consumption @100% load	< 0.1% of FC

*sp.gr of fuel - 0.835kg/litre

Standard operating conditions as per ISO3046 / ISO8528

Prime Rating as per ISO8528

FB15-2SA

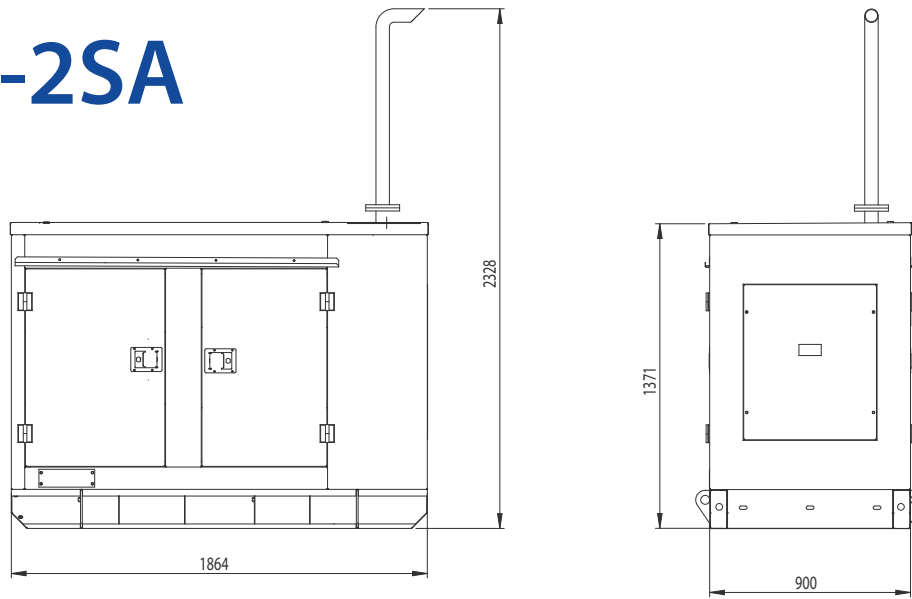

Caterpillar (NI) Limited is the manufacturer of FG Wilson brand diesel generating sets, and our facilities manufacture products in the following locations:
Brazil • China • India

With headquarters in Northern Ireland, FG Wilson products are distributed through a Global Dealer Network.
To contact your local Sales Office, please visit the FG Wilson website at www.fgwilson.com

In line with our policy of continuous product development, we reserve the right to change specification without notice.