

# Cat® Portable Generators



RP2500 • RP3100 • RP4400



## Features

- Reliable power when you need it for home, work and play
- Easy to set up and operate
- Built tough with a heavy-duty frame, never-flat wheels and a hinged handle
- All-steel construction
- Engineered to run cool and quiet
- Enhanced safety features, including recessed sockets with snapfit protective covers

## Specifications

Product Series	RP Generators		
Model Configuration	RP2500	RP3100	RP4400
Maximum Output (Watts)	2500	3100	4400
Rated Output (Watts)	2300	2800	4000
AC Voltage (Volts)	230      *115/230	230      *115/230	230      *115/230
AC Frequency (Hz)	50	50	50
Engine Displacement (cc)	212	212	300
Engine Type	OHV	OHV	OHV
Engine Speed (RPM)	3000	3000	3000
Recommended Oil	SAE30/10W-30	SAE30/10W-30	SAE30/10W-30
Lubrication Method	Splash	Splash	Splash
Automatic Voltage Regulation (AVR)	Yes	Yes	Yes
Starting Method	Recoil	Recoil	Recoil
Low-Oil Shutdown Method	Low Level	Low Level	Low Level
Battery Type	N/A	N/A	N/A
Fuel Gauge	On Tank	On Tank	On Tank
Fuel Tank Nominal Capacity Gal (ltr)	4.5 (17)	4.5 (17)	7.9 (30)
Handle Style	Double Folding	Double Folding	Double Folding
Wheel Type	Never-Flat	Never-Flat	Never-Flat
Warranty	3-Year Limited*	3-Year Limited*	3-Year Limited*


\* 115/230 switchable voltage as standard on UK model only.

\*\* Longer-term 3-year limited warranty applies when registered within 30 days. Standard 2-year limited warranty applies if not registered within 30 days.



## Dimensions and Weights

Product Series	RP Generators		
Model Configuration	RP2500	RP3100	RP4400
Length in (mm)	28.4 (721)	28.4 (721)	32.9 (835)
Width in (mm)	25.2 (639)	25.2 (639)	27.4 (696)
Height in (mm)	23.0 (583)	23.0 (583)	24.7 (628)
Extended Length in (mm)	38.7 (982)	38.7 (982)	45.2 (1148)
Carton Length in (mm)	28.5 (725)	28.5 (725)	33.9 (860)
Carton Width in (mm)	18.9 (480)	18.9 (480)	21.7 (550)
Carton Height in (mm)	21.7 (550)	21.7 (550)	23.4 (593)
Unit Weight lbs (kg)	112.2 (51)	112.2 (51)	163.0 (74)
Shipping Weight lbs (kg)	123.2 (56)	123.2 (56)	176.2 (80)

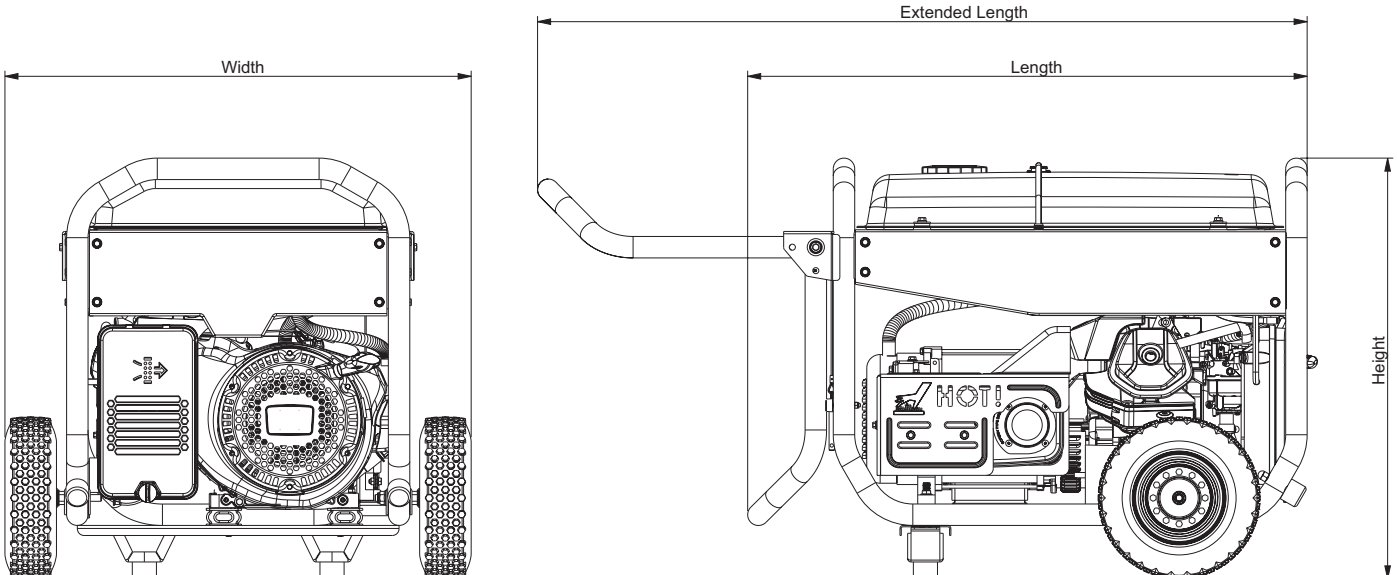

Dealer Contact Information