RP2500 Portable Generator




2500 W Running | 2300 W Starting

Features

- Reliable power when you need it for home, work and play
- Easy to set up and operate
- Built tough with a heavy-duty frame, never-flat wheels and a hinged handle
- All-steel construction
- Enhanced safety features, including sockets with snapfit protective covers



Control Panel

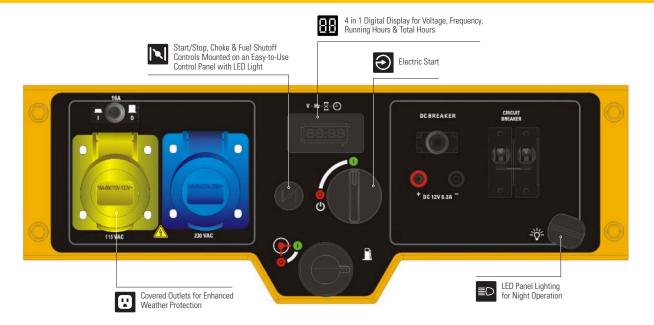

RP2500 Portable Generator




Specifications


Product Series	RP Generators
Model Configuration	RP2500
Maximum Output (Watts)	2500
Rated Output (Watts)	2300
AC Voltage (Volts)	115/230*
AC Frequency (Hz)	50
Engine Displacement (cc)	212
Engine Type	OHV
Engine Speed (RPM)	3000
Recommended Oil	SAE30/10W-30
Lubrication Method	Splash
Automatic Voltage Regulation (AVR)	Yes
Starting Method	Recoil
Low-Oil Shutdown Method	Low Level
Battery Type	N/A
Fuel Gauge	On Tank
Fuel Tank Nominal Capacity Gal (Itr)	4.5 (17)
Handle Style	Double Folding
Wheel Type	Never-Flat
Warranty	3-Year Limited**

^{* 115/230} switchable voltage as standard on UK model only.

Dimensions and Weights

Length in (mm)	28.4 (721)
Width in (mm)	25.2 (639)
Height in (mm)	23.0 (583)
Extended Length in (mm)	38.7 (982)
Carton Length in (mm)	28.5 (725)
Carton Width in (mm)	18.9 (480)
Carton Height in (mm)	21.7 (550)
Unit Weight lbs (kg)	112.2 (51)
Shipping Weight lbs (kg)	123.2 (56)





Dealer Contact Information

CATERPILLAR®

^{**} Longer-term 3-year warranty applies when registered within 30 days. Standard 2-year limited warranty applies if not registered within 30 days.