

336D2 L

Hydraulic Excavator



Engine

Engine Model	Cat® C9 ACERT™	
Engine Power (ISO 14396)	209 kW	280 hp
Net Power (SAE J1349/ISO 9249)	208 kW	279 hp

Weights

Operating Weight	37 086 kg	81,761 lb
Drive		
Maximum Travel Speed	4.6 km/h	2.9 mph
Maximum Drawbar Pull	300.5 kN	67,555 lbf

336D2 L Differentiating Features

Engine and Hydraulics

A powerful Cat C9 ACERT engine that meets U.S. EPA Tier 3, EU Stage IIIA equivalent and Brazil MAR-1 emission standards combined with a highly efficient hydraulic system deliver excellent performance with low fuel consumption.

Structures

Caterpillar design and manufacturing techniques assure you get outstanding durability and service life in the toughest applications.

Operator Station

The spacious ROPS (Roll Over Protective Structure) cab features excellent visibility and easy-to-access switches. The monitor features a full-color graphical display that is easy to see and use. Overall, the new cab provides you with a comfortable working environment for maximum production and efficiency.

Reduced Service and Maintenance Cost

Routine service and maintenance can be completed quickly and easily to help you reduce ownership costs. Convenient access points, extended service intervals, and advanced filtration help keep downtime to a minimum.

Complete Customer Support

Your Cat dealer offers a wide range of services that can be set up under a customer support agreement when you purchase your equipment.

Cat 336D2 L Total Solutions

Caterpillar and its extensive dealer network offer a wide variety of solutions designed to meet the unique needs of your business.

Contents

Operator Station.....	4
Engine	6
Hydraulics	7
Structures and Undercarriage	8
Front Linkage	9
Service and Maintenance	10
Complete Customer Support.....	11
Work Tools.....	12
Specifications.....	14
Standard Equipment.....	29
Optional Equipment.....	30
Notes.....	31





The 336D2 L incorporates innovations to improve your job site efficiency through low owning and operating costs, excellent performance, and high versatility.

Operator Station

Ergonomically designed to keep you comfortable and productive all day long.



Cab Structure and Mounts

The cab shell is attached to the frame with viscous rubber mounts, which dampen vibrations and sound levels while enhancing your comfort. Thick steel tubing along the bottom perimeter improves the cab's resistance to fatigue and vibration.

ROPS Certified Operator Station

The 336D2 features a ROPS (Roll Over Protective Structure) cab structure as standard.

This design also allows for a Falling Object Guard System (FOGS) or front windshield guard to be bolted directly to the cab, either at the factory or in the field, enabling the machine to meet all job site requirements.

- More glass versus previous non-ROPS cab to improve visibility
- Volume increase: more interior head room space
- Improved cab pressurization
- ROPS cab air filter accessible at ground level

Seat

The air suspension seat provides a variety of adjustments to accommodate a wide range of operators. The seat includes a seat heater to meet your needs for comfort and productivity.

Joystick Control and Console

Low-effort pilot-operated joystick controls are designed to match your natural wrist and arm position for maximum comfort and minimum fatigue. The right and left joystick console can be adjusted to meet your individual preferences, improving overall comfort and productivity during the course of a long work day.

Climate Control

Positive filtered ventilation with a pressurized cab is standard. Fresh air or re-circulated air can be selected with a switch on the left console.

Windows and Wipers

All glass is affixed directly to the cab to maximize visibility, eliminating window frames. The upper front windshield opens, closes, and stores on the roof above the operator with a one-touch action release system. Pillar-mounted wipers increase your viewing area and offer continuous and intermittent modes.



Monitor

The new monitor features a 40 percent larger screen with four times increased resolution display.

The LCD monitor is equipped with a warning lamp and buzzer for critical engine oil pressure, coolant temperature and oil temperature. Programmable in up to 42 languages to meet today's diverse workforce, the monitor clearly displays critical information needed to operate efficiently and effectively.

Filters and fluid change intervals are available in the main menu which also projects the image from the optional rearview camera, further enhancing your job site safety and productivity.

Engine

Powerful, reliable, and fuel efficient to deliver more to your bottom line.



Emission Standards

The Cat C9 ACERT engine meets Tier 3/Stage IIIA equivalent and Brazil MAR-1 emission standards. The engine incorporates proven robust components and precision manufacturing you can count on for reliable and efficient operation.

Filtration System

The C9 ACERT engine features an improved filtration system to ensure reliability even with less-than-quality fuel. Service intervals have been extended and the number of filters reduced to maximize your profit potential.

Automatic Engine Speed Control

Automatic engine speed control is activated during no-load or light-load conditions to reduce engine speed – all to help minimize fuel consumption.

Low Sound and Vibration

The Cat C9 ACERT engine is built to run quietly with limited vibration, which contributes to improving your comfort.

Hydraulics

Uncanny power and control for multiple applications.



Hydraulic System

Hydraulic system pressure from the two-pump system delivers terrific digging performance and productivity. The hydraulic system and component locations have been designed to provide a high level of system efficiency. The main pumps, control valves, and hydraulic tank are located close together to allow for shorter tubes and lines between components, reducing friction loss and pressure drops.

Pilot System

An independent pilot pump enables smooth, precise control for the front linkage, swing, and travel operations.

Hydraulic Cross-Sensing System

The hydraulic cross-sensing system utilizes each of two hydraulic pumps to 100 percent of engine power under all operating conditions. This improves productivity with faster implement speeds and quicker, stronger pivot turns.

Auxiliary Hydraulic Valve

Control circuits are available as attachments to improve versatility. They allow operation of high- and medium-pressure tools such as shears, grapples, hammers, pulverizers, multiprocessors, and vibratory plate compactors.

Boom and Stick Regeneration Circuit

Boom and stick regeneration circuits save energy during boom-down and stick-in operation to increase efficiency and reduce cycle times and pressure loss for higher productivity, lower operating costs, and increased fuel efficiency.

Hydraulic Cylinder Snubbers

Snubbers are located at the rod end of the boom cylinders and both ends of the stick cylinders to cushion shocks while reducing sound levels and extending component life.

Hydraulic Activation Control Lever

With the hydraulic activation lever in the neutral position, all front linkage, swing, and travel functions are isolated.



Structures and Undercarriage

Strong and durable like you expect from Cat excavators.

Main Frame

The rugged main frame is built to perform in the toughest applications. The X-shaped, box-section carbody provides excellent resistance to torsional bending, and press-formed, robot-welded track roller frames provide exceptional strength and durability.

Rollers and Idlers

Sealed and lubricated track rollers, carrier rollers, and idlers provide excellent service life to keep your machine in the field and working longer.

Counterweights


A 6.0 mt (6.6 t) weight works well in applications that require heavy lifting. It's bolted directly to the main frame for extra rigidity.


Long Undercarriage

Wide and sturdy long undercarriage offers an excellent platform for applications that require maximum stability and lift capacity.

Undercarriage

Durable Cat undercarriage absorbs stress and provides excellent stability. The 336D2 L comes standard with grease lubricated tracks. The track links are assembled and sealed with grease to decrease internal bushing wear, reduce travel noise and extend service life lowering operating costs.

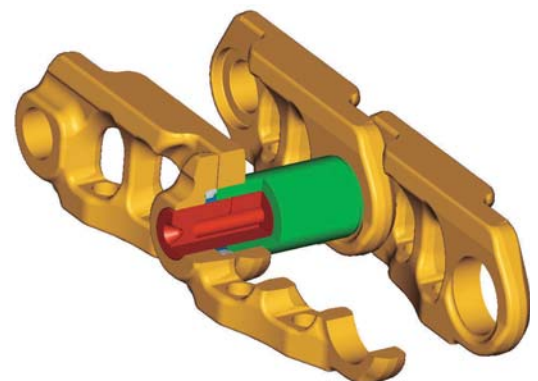

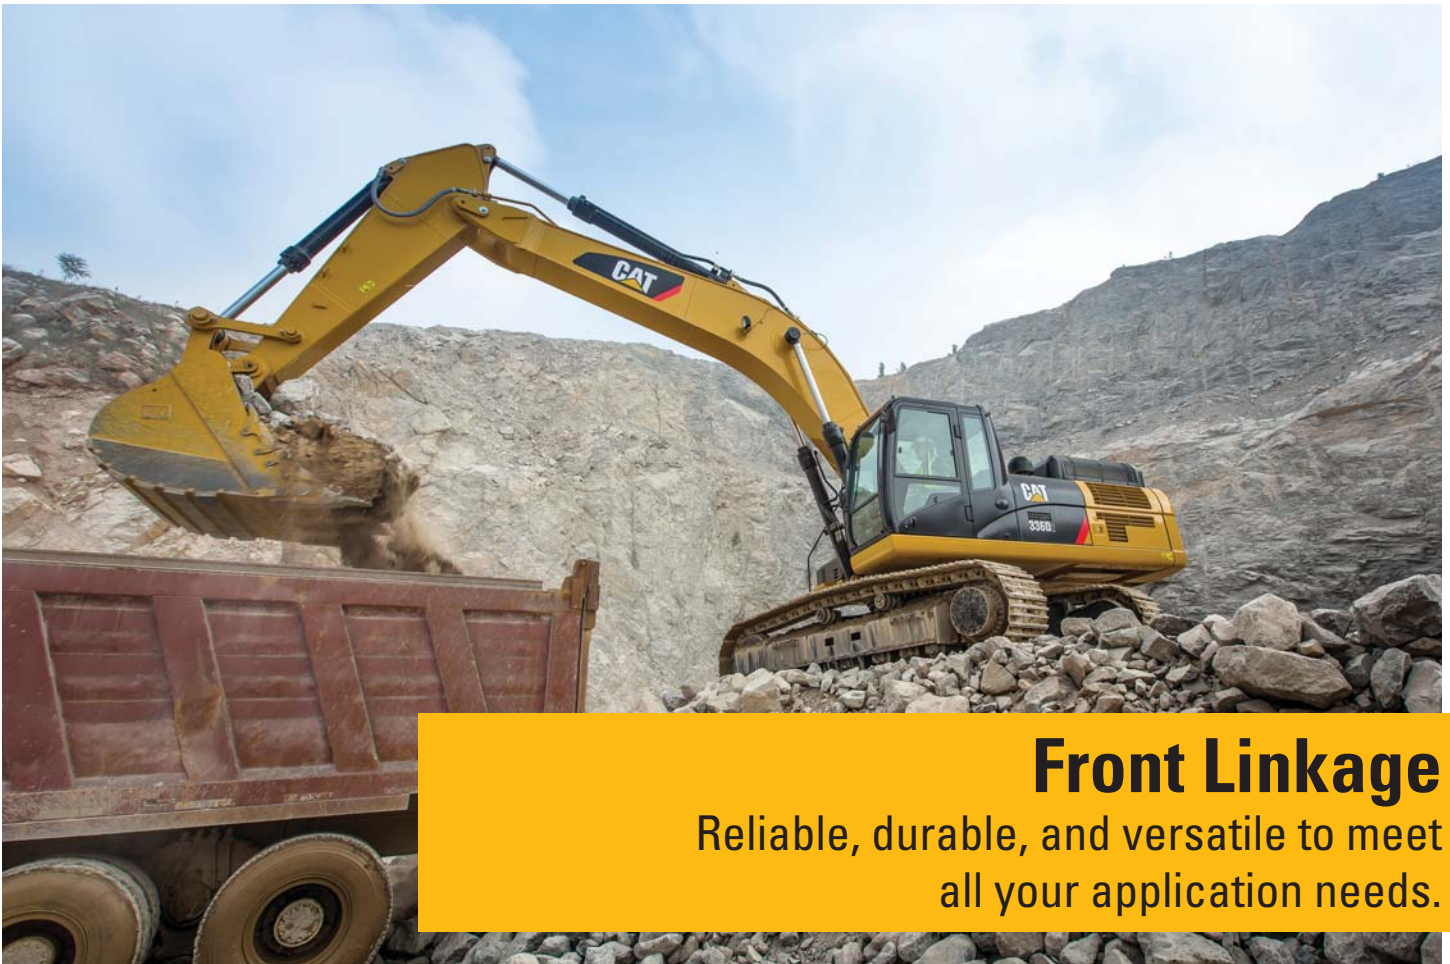

Front Linkage

Reliable, durable, and versatile to meet all your application needs.

Heavy-Duty Reach Front Linkage

The heavy-duty (HD) reach front linkage is built to work in a variety of tough, demanding applications like loading rock or hammering concrete. The 6.5 m (21'4") HD boom is made of high-tensile-strength steel using a large box-section design with interior baffle plates and an additional bottom guard for long life and durability.

- The 3.2 m (10'6") stick is a versatile option that will meet the needs for most of your construction applications. A heavy-duty version is also available.

Mass Excavation Front Linkage

The mass excavation (ME) front linkage is designed to maximize machine performance through superior digging forces and a larger bucket capacity. The 6.18 m (20'3") mass excavation boom is reinforced with a large cross section and internal baffle plates for long life and durability.

The ME reach boom has two stick options to meet your demanding applications:

- The 2.55 m (8'4") stick is designed for large, high-volume earthmoving work.
- The 2.15 m (7'1") stick is best when you primarily use high-capacity buckets in truck loading applications to maximize your breakout force and increase your bucket fill factor.

Service and Maintenance

Simplified design to save you time and money.

Ground-Level Service

The design and layout of the 336D2 was made with the service technician in mind. Most service locations are easily accessible at ground level to allow service and maintenance to get completed quickly and efficiently.

Air Filter Compartment

The air filter features a double-element construction for superior cleaning efficiency. When the air filter plugs, a warning is displayed on the cab monitor. Maintenance-free batteries are standard along with a battery disconnect switch.

Greasing Points

A concentrated remote greasing block on the boom allows greasing of hard-to-reach locations on the boom and stick.

Fan Guard

The engine radiator fan is enclosed by a steel guard that provides maximum protection when carrying out routine service and maintenance.



Anti-Skid Plating

Anti-skid plating covers the entire upper structure and storage box to prevent slipping during maintenance. Safety is further enhanced with the addition of countersunk bolts to reduce trip hazards.

Diagnostics and Monitoring

Standard hydraulic test ports enable a service technician to evaluate the hydraulic system, engine oil, and coolant quickly and easily for more efficient maintenance.

Pump Compartment

A service door on the right side of the upper structure allows ground-level access to the hydraulic pumps, hydraulic filters, engine oil filter, and fuel filters.

Radiator Compartment

The left rear service door allows easy access to the engine radiator, hydraulic oil cooler, air-to-air aftercooler, and AC condenser. A reserve tank and drain cock are attached to the radiator for ground-level maintenance.





Complete Customer Support

A wide range of personalized solutions
from your local Cat dealer.

Product Support

Cat dealers utilize a worldwide computer network to find in-stock parts to minimize machine downtime. You can also save money with our line of remanufactured components.

Machine Selection

Your Cat dealers can provide specific recommendations with detailed comparisons of the Cat machines you are considering before you buy. This ensures you get the right size machine and appropriate work tools to meet all of your application needs.

Maintenance Services

Repair option programs guarantee the cost of repairs up front. Condition monitoring services and diagnostic programs such as scheduled oil sampling, coolant sampling, and technical analysis help you avoid unscheduled repairs.

Customer Support Agreements

Cat dealers offer a variety of product support agreements that can be tailored to meet your specific needs. These plans can cover the entire machine – including attachments – to help protect your investment.

Replacement

Repair, rebuild, or replace? Your Cat dealers can help you evaluate the costs involved so you can make the right choice.

Work Tools


Dig, hammer, rip, and cut with confidence.




1



2

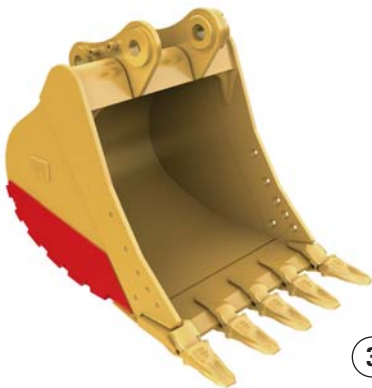

3

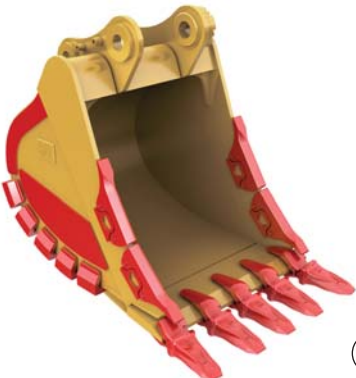

4

Versatility and Performance

Each Cat work tool is designed to optimize the versatility and performance of your machine. An extensive range of buckets, compactors, grapples, multi-processors, rippers, crushers, pulverizers, hammers, and shears is available for your 336D2 L.

Buckets and GET

Cat buckets and Cat Ground Engaging Tools (GET) are designed and matched to the machine to ensure optimal performance and fuel efficiency.

General-Duty Buckets (GD)

GD buckets are for digging in low-impact, moderately abrasive materials such as dirt, loam, gravel, and clay.

Heavy-Duty Buckets (HD)

HD buckets are a good starting point when application conditions vary – especially when conditions include mixed dirt, clay, sand, and gravel.

Severe-Duty Buckets (SD)

SD buckets are best suited to highly abrasive materials like shot rock, sand stone, and granite.

Extreme-Duty Buckets (XD)

XD buckets are for extremely abrasive materials like high-quartzite granite.

- 1) General-Duty Buckets (GD)
- 2) Heavy-Duty Buckets (HD)
- 3) Severe-Duty Buckets (SD)
- 4) Extreme-Duty Buckets (XD)

Couplers

Quick couplers allow one person to change work tools in seconds for maximum performance and flexibility on a job site. One machine can move rapidly from task to task, and a fleet of similarly equipped machines can share a common work tool inventory.

Center-Lock™ Pin Grabber Coupler

Center-Lock is a pin grabber coupler and features a patent-pending locking system. A highly visible secondary lock clearly shows the operator when the coupler is engaged or disengaged from the bucket or work tool.

E Series Hammers

E Series hammers bring together customer expectations for performance, quality, and serviceability along with Caterpillar manufacturing expertise. They are also quiet – a significant benefit in urban and noise-restricted work areas.

Rippers

Constructed from high-strength steels and built to last, Cat rippers endure in the toughest conditions. The box-section structure is reinforced for maximum rigidity, transmitting the full machine power to the material being ripped. Rippers feature a replaceable wear tip, and most models also come equipped with a replaceable shank protector.

Grapples

Cat grapples make Cat excavators the ideal machine for handling loose material, sorting trash, and demolition site cleanup. An array of styles and sizes is available to match excavators to the task at hand.

Multi-Processors

Multi-processors do the work of many types of demolition tools by use of interchangeable jaw sets. Changing jaws allows a single unit to crush, pulverize, and perform a variety of specialized tasks such as cutting steel rebar and tanks.

Shears

Cat shears are designed to take full advantage of the hydraulic flows and pressures produced by Cat excavators – all to enhance productivity without compromising safety or causing premature wear of the shear or carrier.

Pulverizers

Mechanical pulverizers are cost-effective tools for recycling demolished concrete debris. The bucket cylinder on the excavator powers the pulverizer, eliminating the need for a dedicated cylinder, associated hydraulics, and additional installation cost.

Compactors

Cat compactors make job site compaction quick, efficient, and cost effective.

Crushers

The hydraulic concrete crusher is well suited for demolition in residential areas. The tool combines several demolition operations in one piece of equipment:

- Breaking out concrete from fixed structures
- Pulverizing concrete
- Cutting reinforcement rods and small steel profiles



336D2 L Hydraulic Excavator Specifications

Engine

Engine Model	Cat C9 ACERT	
Engine Power (ISO 14396)	209 kW	280 hp
Net Power (SAE J1349/ISO 9249)	208 kW	279 hp
Bore	112 mm	4.41 in
Stroke	149 mm	5.87 in
Displacement	8.8 L	537 in ³

- The Cat C9 ACERT meets Tier 3/Stage IIIA equivalent and Brazil MAR-1 emission standards.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler, and alternator.
- The field-proven C9 ACERT engine can work efficiently at altitudes up to 2300 m (7,546 ft).

Swing Mechanism

Swing Speed	8.3 rpm	
Swing Torque	109 kN·m	80,144 lbf·ft

Drive

Maximum Gradeability	70%/30°	
Maximum Travel Speed	4.6 km/h	2.9 mph
Maximum Drawbar Pull	300.5 kN	67,555 lbf

Hydraulic System

Main System – Maximum Flow (total)	562 L/min	148 gal
Swing System – Maximum Flow	265 L/min	70 gal
Maximum Pressure – Equipment	35 000 kPa	5,076 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	28 000 kPa	4,061 psi
Pilot System – Maximum Flow	40 L/min	11 gal/min
Pilot System – Maximum Pressure	4000 kPa	580 psi
Boom Cylinder – Bore	150 mm	5.9 in
Boom Cylinder – Stroke	1440 mm	56.7 in
Stick Cylinder – Bore	170 mm	6.7 in
Stick Cylinder – Stroke	1738 mm	68.4 in
DB Bucket Cylinder – Bore	150 mm	5.9 in
DB Bucket Cylinder – Stroke	1151 mm	45.3
TB Bucket Cylinder – Bore	160 mm	6.3 in
TB Bucket Cylinder – Stroke	1356 mm	53.4 in


Service Refill Capacities

Fuel Tank Capacity	620 L	163.79 gal
Cooling System	40 L	10.57 gal
Engine Oil	41 L	10.57 gal
Swing Drive	19 L	5.02 gal
Final Drive (each)	8 L	2.11 gal
Hydraulic System (including tank)	410 L	108.31 gal
Hydraulic Tank	175 L	46.2 gal

336D2 L Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate.

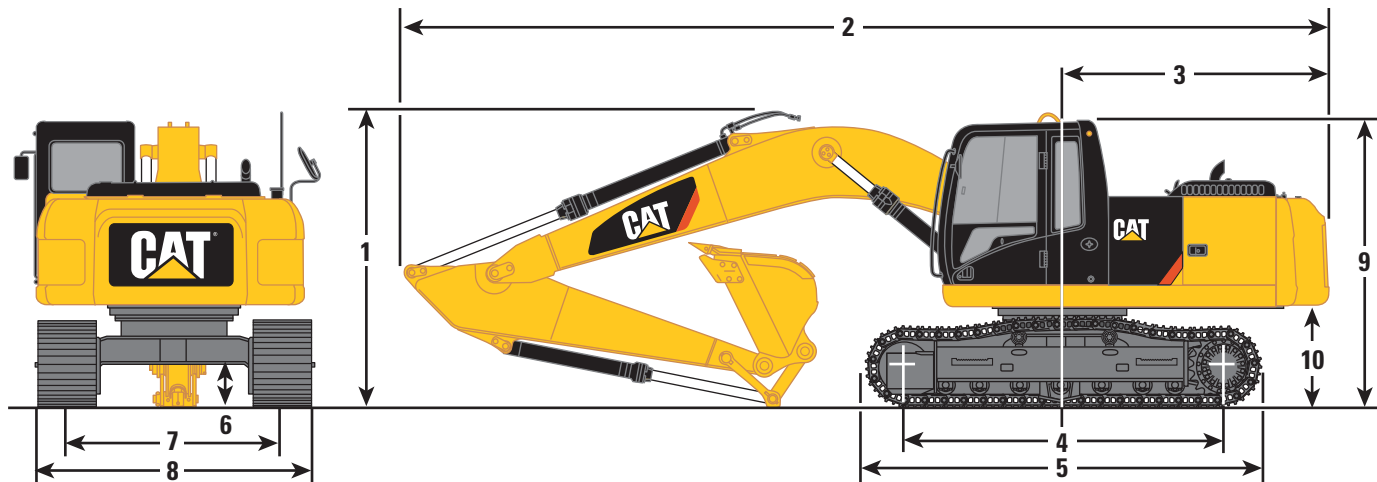

Boom Options	HD Reach Boom 6.5 m (21'4")	Mass Boom 6.18 m (20'3")	
Stick Options	R3.2DB (10'6")	M2.55TB (8'4")	M2.15TB (7'1")
1 Shipping Height*	3490 mm (11'5")	3600 mm (11'10")	3630 mm (11'11")
2 Shipping Length	11 190 mm (36'9")	10 890 mm (35'9")	10 930 mm (35'10")
3 Tail Swing Radius	3490 mm (11'5")	3490 mm (11'5")	3490 mm (11'5")
4 Length to Center of Rollers	4040 mm (13'3")	4040 mm (13'3")	4040 mm (13'3")
5 Track Length	5020 mm (16'6")	5020 mm (16'6")	5020 mm (16'6")
6 Ground Clearance*	510 mm (1'8")	510 mm (1'8")	510 mm (1'8")
Ground Clearance**	480 mm (1'7")	480 mm (1'7")	480 mm (1'7")
7 Track Gauge	2590 mm (8'6")	2590 mm (8'6")	2590 mm (8'6")
8 Transport Width			
600 mm (24 in) Shoes	3190 mm (10'6")	3190 mm (10'6")	3190 mm (10'6")
700 mm (28 in) Shoes	3290 mm (10'10")	3290 mm (10'10")	3290 mm (10'10")
800 mm (32 in) Shoes	3390 mm (11'1")	3390 mm (11'1")	3390 mm (11'1")
9 Cab Height – ROPS Cab	3160 mm (10'4")	3160 mm (10'4")	3160 mm (10'4")
10 Counterweight Clearance**	1220 mm (4'0")	1220 mm (4'0")	1220 mm (4'0")
Type	DB1550HD	TB1650HD	TB1650HD
Capacity	SAE 1.88 m ³ (2.46 yd ³)	SAE 2.41 m ³ (3.15 yd ³)	SAE 2.41 m ³ (3.15 yd ³)
Tip Radius	1784 mm (5'10")	1914 mm (6'3")	1914 mm (6'3")


*Including shoe lug height.

**Without shoe lug height.

336D2 L Hydraulic Excavator Specifications

Working Ranges

All dimensions are approximate.

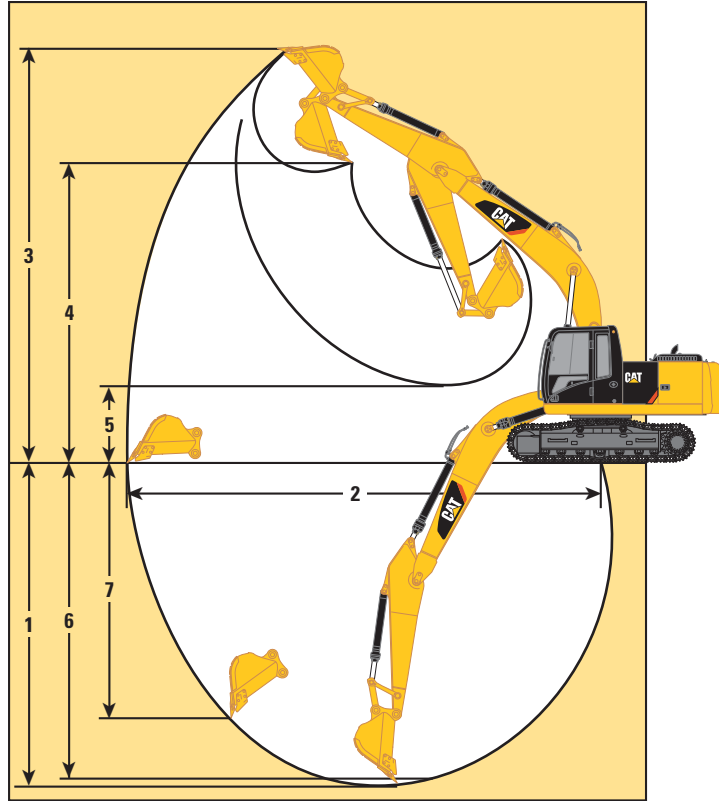

Boom Options	HD Reach Boom 6.5 m (21'4")	Mass Boom 6.18 m (20'3")	
Stick Options	R3.2DB (10'6")	M2.55TB (8'4")	M2.15TB (7'1")
1 Maximum Digging Depth	7510 mm (24'8")	6670 mm (21'11")	6270 mm (20'7")
2 Maximum Reach at Ground Level	11 050 mm (36'3")	10 280 mm (33'9")	9850 mm (32'4")
3 Maximum Cutting Height	10 250 mm (33'8")	9990 mm (32'9")	9640 mm (31'8")
4 Maximum Loading Height	7080 mm (23'3")	6600 mm (21'8")	6310 mm (20'8")
5 Minimum Loading Height	2580 mm (8'6")	2900 mm (9'6")	3300 mm (10'10")
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	7360 mm (24'2")	6490 mm (21'4")	6060 mm (19'11")
7 Maximum Vertical Wall Digging Depth	5420 mm (17'9")	4700 mm (15'5")	4060 mm (13'4")
Type	DB1550HD	TB1650HD	TB1650HD
Capacity	SAE 1.88 m ³ (2.46 yd ³)	SAE 2.41 m ³ (3.15 yd ³)	SAE 2.41 m ³ (3.15 yd ³)
Tip Radius	1784 mm (5'10")	1914 mm (6'3")	1914 mm (6'3")

336D2 L Hydraulic Excavator Specifications

Major Component Weights

Lower Structure (without counterweight and track)	8700 kg (19,200 lb)
Upper Structure (without front linkage)	9200 kg (20,300 lb)
Counterweight	
6.0 mt (6.6 t)	6000 kg (13,200 lb)
Boom (includes lines, pins and stick cylinder)	
HD Reach Boom – 6.5 m (21'4")	4200 kg (9,300 lb)
Mass Boom – 6.18 m (20'3")	4000 kg (8,800 lb)
Stick (includes lines, pins and bucket cylinder)	
R3.2DB (10'6")	1800 kg (4,000 lb)
HD R3.2DB (10'6")	2000 kg (4,400 lb)
M2.55TB (8'4")	2000 kg (4,400 lb)
M2.15TB (7'1")	1900 kg (4,200 lb)
Track Shoe	
800 mm (32") Triple Grouser	5100 kg (11,200 lb)
700 mm (28") Triple Grouser	4400 kg (9,700 lb)
600 mm (24") Triple Grouser	4100 kg (9,000 lb)
600 mm (24") Double Grouser	4900 kg (10,800 lb)
Quick Coupler	600 kg (1,300 lb)
Bucket	
DB1550HD SAE 1.88 m ³ (2.46 yd ³)	1600 kg (3,500 lb)
TB1650HD SAE 2.41 m ³ (3.15 yd ³)	2400 kg (5,300 lb)

*Base machine includes 75 kg (165 lb) operator weight and 90% fuel weight and undercarriage with center guard.

336D2 L Hydraulic Excavator Specifications

Operating Weights and Ground Pressures


336D2 L – Counterweight 6.0 mt (6.6 t)								
	800 mm (31") Triple Grouser Shoes		700 mm (28") Triple Grouser Shoes		600 mm (24") Triple Grouser Shoes		600 mm (24") Double Grouser Shoes	
HD Reach Boom – 6.5 m (21'4")								
R3.2DB (10'6")	36 600 kg (80,700 lb)	51.1 kPa (7.4 psi)	35 900 kg (79,100 lb)	57.3 kPa (8.3 psi)	35 600 kg (78,500 lb)	66.3 kPa (9.6 psi)	36 400 kg (80,200 lb)	67.8 kPa (9.8 psi)
HD R3.2DB (10'6")	36 800 kg (81,100 lb)	51.4 kPa (7.5 psi)	36 100 kg (79,600 lb)	57.6 kPa (8.4 psi)	35 800 kg (78,900 lb)	66.7 kPa (9.7 psi)	36 600 kg (80,700 lb)	68.2 kPa (9.9 psi)
Mass Boom – 6.18 m (20'3")								
M2.55TB (8'4")	37 400 kg (82,500 lb)	52.2 kPa (7.6 psi)	36 700 kg (80,900 lb)	58.6 kPa (8.5 psi)	36 300 kg (80,000 lb)	67.6 kPa (9.8 psi)	37 200 kg (82,000 lb)	69.3 kPa (10.1 psi)
M2.15TB (7'1")	37 400 kg (82,500 lb)	52.2 kPa (7.6 psi)	36 600 kg (80,700 lb)	58.4 kPa (8.5 psi)	36 300 kg (80,000 lb)	67.6 kPa (9.8 psi)	37 100 kg (81,800 lb)	69.1 kPa (10.0 psi)

Bucket and Stick Digging Forces

	Reach Boom – 6.5 m (21'4")		Mass Boom – 6.18 m (20'3")	
	R3.2DB (10'6")		M2.55TB (8'4")	M2.15TB (7'1")
Heavy-Duty Bucket				
Bucket Digging Force (ISO)	211.1 kN (47,460 lbf)		265.0 kN (59,570 lbf)	265.0 kN (59,570 lbf)
Stick Digging Force (ISO)	166.9 kN (37,520 lbf)		190.7 kN (42,880 lbf)	222.2 kN (49,950 lbf)
Bucket Digging Force (SAE)	184.3 kN (41,440 lbf)		228.7 kN (51,410 lbf)	228.7 kN (51,410 lbf)
Stick Digging Force (SAE)	161.7 kN (36,360 lbf)		182.9 kN (41,130 lbf)	211.8 kN (47,620 lbf)

336D2 L Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Long Undercarriage – Counterweight: 6.0 mt (6.6 t)

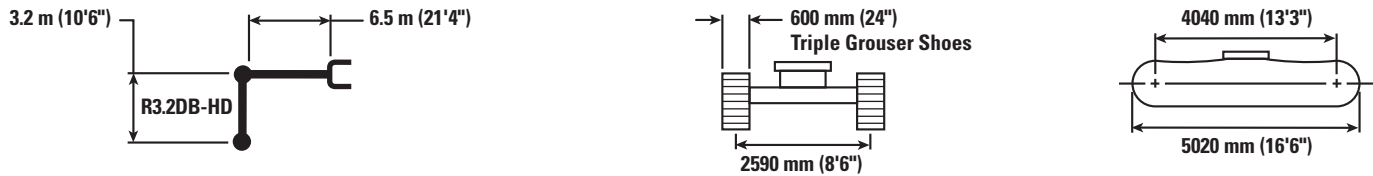

		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
7500 mm 300 in	kg lb							*7750 17,200	7050 15,000			*6700 *14,800	*6700 *14,800	7710 300
6000 mm 240 in	kg lb							*7850 *17,200	7000 15,000			*6500 *14,300	5500 12,250	8580 340
4500 mm 180 in	kg lb			*12 050	*12 050	*9650 *20,850	9550 20,600	*8450 *18,350	6750 14,500	*7700	4950	*6550 *14,350	4850 10,700	9130 360
3000 mm 120 in	kg lb			*15 200 *32,650	13 550 29,300	*11 150 *24,100	8950 19,250	*9200 *19,950	6450 13,850	7700	4850	*6800 *14,900	4500 9,900	9410 370
1500 mm 60 in	kg lb			*17 500 *37,700	12 550 27,100	*12 450 *26,950	8400 18,100	9900 21,300	6150 13,200	7500	4700	7000 15,400	4350 9,600	9440 380
0 mm 0 in	kg lb			*18 250 *39,500	12 150 26,100	*13 250 *28,650	8050 17,350	9650 20,800	5900 12,750	7400	4600	7150 15,750	4450 9,750	9220 370
-1500 mm -60 in	kg lb	*13 250 *29,900	*13 250 *29,900	*17 850 *38,700	12 050 25,900	*13 300 *28,750	7900 17,050	9550 20,550	5800 12,550			7700 16,950	4750 10,450	8750 350
-3000 mm -120 in	kg lb	*20 900 *47,350	*20 900 *47,350	*16 550 *35,800	12 200 26,200	*12 600 *27,150	7950 17,100	9600 20,700	5850 12,650			8850 *19,550	5450 12,050	7960 320
-4500 mm -180 in	kg lb	*18 550 *39,900	*18 550 *39,900	*13 950 *30,000	12 500 26,950	*10 550 *22,450	8200 17,700					*8900 *19,550	7000 15,700	6750 270



ISO 10567




*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336D2 L Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Long Undercarriage – Counterweight: 6.0 mt (6.6 t)

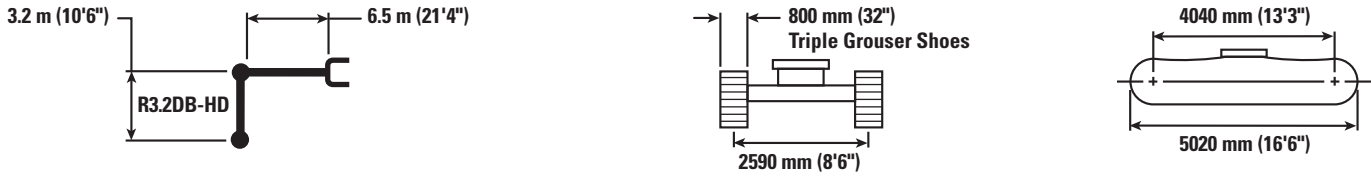

		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
7500 mm 300 in	kg lb							*7750 17,200	7250 15,350			*6700 14,800	*6700 14,800	7710 300
6000 mm 240 in	kg lb							*7850 17,200	7150 15,350			*6500 14,300	5650 12,550	8580 340
4500 mm 180 in	kg lb			*12 050	*12 050	*9650 20,850	*9650 20,850	*8450 18,350	6900 14,850	*7700	5100	*6550 14,350	5000 11,000	9130 360
3000 mm 120 in	kg lb			*15 200 32,650	13 900 30,000	*11 150 24,100	9150 19,750	*9200 19,950	6600 14,200	7900 16,950	5000 10,650	*6800 14,900	4650 10,200	9410 370
1500 mm 60 in	kg lb			*17 500 37,700	12 900 27,800	*12 450 26,950	8650 18,600	*9950 21,550	6300 13,550	7750 16,650	4850 10,350	7200 15,850	4500 9,900	9440 380
0 mm 0 in	kg lb			*18 250 39,500	12 500 26,850	*13 250 28,650	8300 17,850	9950 21,400	6100 13,100	7650 16,400	4700 10,150	7350 16,200	4550 10,050	9220 370
-1500 mm -60 in	kg lb	*13 250 29,900	*13 250 29,900	*17 850 38,700	12 400 26,650	*13 300 28,800	8150 17,550	9850 21,150	6000 12,900			7900 17,450	4900 10,750	8750 350
-3000 mm -120 in	kg lb	*20 900 47,350	*20 900 47,350	*16 550 35,800	12 500 26,900	*12 600 27,150	8200 17,600	*9700 20,800	6050 13,050			*8850 19,550	5600 12,400	7960 320
-4500 mm -180 in	kg lb	*18 550 39,900	*18 550 39,900	*13 950 30,000	12 850 27,700	*10 550 22,450	8400 18,200					*8900 19,550	7200 16,150	6750 270



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.










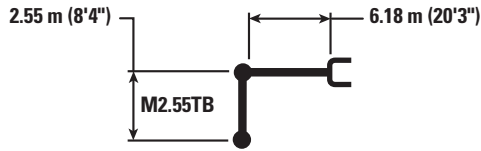

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336D2 L Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Long Undercarriage – Counterweight: 6.0 mt (6.6 t)



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*9250 *20,450	*9250 *20,450			*8300 *18,400	*8300 *18,400	6590 260
6000 mm 240 in	kg lb					*9600 *20,850	*9600 *20,850	*9050	6750	*7900 *17,450	6600 14,750	7600 300
4500 mm 180 in	kg lb			*13 400 *28,750	*13 400 *28,750	*10 650 *23,050	9400 20,200	*9300 *20,300	6600 14,200	*7900 *17,400	5700 12,600	8210 330
3000 mm 120 in	kg lb			*16 350 *35,150	13 350 28,800	*11 950 *25,900	8850 19,050	*9900 *21,500	6350 13,700	*8200 *18,050	5250 11,500	8520 340
1500 mm 60 in	kg lb			*18 200 *39,250	12 500 26,950	*13 050 *28,250	8350 18,050	9850 21,250	6100 13,200	8100 17,850	5050 11,150	8550 340
0 mm 0 in	kg lb			*18 350 *39,800	12 250 26,350	*13 550 29,200	8100 17,450	9700 20,850	5950 12,850	8400 18,450	5200 11,450	8310 330
-1500 mm -60 in	kg lb	*16 900 *38,350	*16 900 *38,350	*17 450 *37,800	12 250 26,350	*13 200 *28,550	8050 17,300	9700 20,850	5950 12,850	9200 20,350	5700 12,550	7780 310
-3000 mm -120 in	kg lb	*19 950 *43,300	*19 950 *43,300	*15 350 *33,200	12 450 26,800	*11 700 *25,100	8150 17,650			*9650 *21,200	6850 15,200	6880 270
-4500 mm -180 in	kg lb			*11 250 *23,800	*11 250 *23,800					*8900 *19,450	*8900 *19,450	5430 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

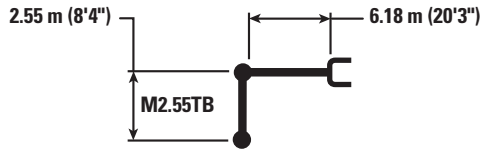336D2 L Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Long Undercarriage – Counterweight: 6.0 mt (6.6 t)



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*9250 *20,450	*9250 *20,450			*8300 *18,400	*8300 *18,400	6590 260
6000 mm 240 in	kg lb					*9600 *20,850	*9600 *20,850	*9050	6950	*7900 *17,450	6800 15,150	7600 300
4500 mm 180 in	kg lb			*13 400 *28,750	*13 400 *28,750	*10 650 *23,050	9600 20,700	*9300 *20,300	6800 14,600	*7900 *17,400	5850 12,950	8210 330
3000 mm 120 in	kg lb			*16 350 *35,150	13 650 29,500	*11 950 *25,900	9050 19,500	*9900 *21,500	6550 14,050	*8200 *18,050	5350 11,850	8520 340
1500 mm 60 in	kg lb			*18 200 *39,250	12 850 27,700	*13 050 *28,250	8600 18,550	10 150 21,850	6300 13,550	8350 18,400	5200 11,500	8550 340
0 mm 0 in	kg lb			*18 350 *39,800	12 600 27,050	*13 550 *29,300	8350 17,950	10 000 21,500	6150 13,200	8600 19,000	5350 11,750	8310 330
-1500 mm -60 in	kg lb	*16 900 *38,350	*16 900 *38,350	*17 450 *37,800	12 600 27,050	*13 200 *28,550	8250 17,800	9950 21,450	6150 13,200	9500 20,900	5850 12,900	7780 310
-3000 mm -120 in	kg lb	*19 950 *43,300	*19 950 *43,300	*15 350 *33,200	12 800 27,550	*11 700 *25,100	8400 18,100			*9650 *21,200	7050 15,600	6880 270
-4500 mm -180 in	kg lb			*11 250 *23,800	*11 250 *23,800					*8900 *19,450	*8900 *19,450	5430 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

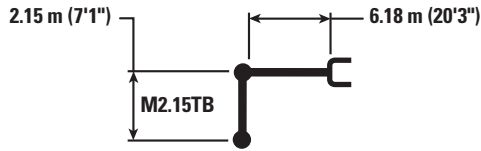336D2 L Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Long Undercarriage – Counterweight: 6.0 mt (6.6 t)



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				
												mm in
7500 mm 300 in	kg lb					*10 050 9850				*10 050 *22,300	9800 22,200	6030 240
6000 mm 240 in	kg lb					*10 150 *22,150	9750 20,950			*9700 *21,350	7300 16,350	7120 280
4500 mm 180 in	kg lb			*14 250 *30,650	*14 250 *30,650	*11 150 *24,150	9300 20,000	*9750 *21,300	6600 14,100	*9600 *21,150	6200 13,700	7780 310
3000 mm 120 in	kg lb			*36,850 28,200		*12 400 *26,800	8750 18,850	10 100 21,750	6350 13,650	9000 19,800	5650 12,450	8100 320
1500 mm 60 in	kg lb					*13 350 *28,850	8350 17,950	9900 21,250	6150 13,200	8750 19,300	5500 12,050	8140 320
0 mm 0 in	kg lb			*18 150 *39,450	12 250 26,400	*13 600 29,200	8100 17,500	9750 21,000	6000 12,950	9100 20,000	5650 12,400	7890 310
-1500 mm -60 in	kg lb	*17 800 *40,750	*17 800 *40,750	*16 950 *36,750	12 350 26,550	*13 000 *28,100	8100 17,450			10 150 22,400	6250 13,800	7320 290
-3000 mm -120 in	kg lb	*17 950 *39,050	*17 950 *39,050	*14 500 *31,350	12 650 27,150	*11 050 *23,550	8300 18,000			*10 100 *22,250	7750 17,200	6360 250



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.













Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

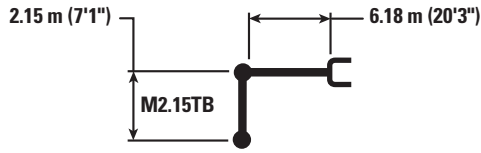336D2 L Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Long Undercarriage – Counterweight: 6.0 mt (6.6 t)



	3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				
											mm in
7500 mm 300 in	kg				*10 050	*10 050			*10 050	10 000	6030
	lb				*22,300	21,400			*22,300	*22,300	240
6000 mm 240 in	kg				*10 150	9950			*9700	7500	7120
	lb				*22,150	21,400			*21,350	16,750	280
4500 mm 180 in	kg		*14 250	*14 250	*11 150	9500	*9750	6750	*9600	6350	7780
	lb		*30,650	*30,650	*24,150	20,500	*21,300	14,500	*21,150	14,100	310
3000 mm 120 in	kg				*12 400	9000	*10 200	6500	9250	5800	8100
	lb				*26,800	19,350	*22,200	14,050	20,350	12,800	320
1500 mm 60 in	kg				*13 350	8550	10 150	6300	9000	5650	8140
	lb				*28,850	18,450	21,850	13,600	19,850	12,400	320
0 mm 0 in	kg		*18 150	12 600	*13 600	8350	10 050	6200	9350	5800	7890
	lb		*39,450	27,100	*29,450	18,000	21,600	13,350	20,600	12,750	310
-1500 mm -60 in	kg	*17 800	*17 800	*16 950	12 700	*13 000	8350		*10 250	6450	7320
	lb	*40,750	*40,750	*36,750	27,300	*28,100	17,950		*22,500	14,200	290
-3000 mm -120 in	kg	*17 950	*17 950	*14 500	12 950	*11 050	8550		*10 100	7950	6360
	lb	*39,050	*39,050	*31,350	27,900	*23,550	18,450		*22,250	17,650	250



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336D2 L Hydraulic Excavator Specifications

336D2 L Work Tool Offering Guide*

Boom Type	HD Reach Boom		Mass	
	HD R3.2	M2.55	M2.15	
Hydraulic Hammer	H140Es	H140Es	H140Es	
	H160Es	H160Es H180Es	H160Es	
Multi-Processor	MP324 CC Jaw MP324 D Jaw MP324 P Jaw MP324 U Jaw MP324 S Jaw MP324 TS Jaw			
	MP30 with CC Jaw MP30 with CR Jaw MP30 with PS Jaw MP30 with S Jaw	MP30 with CC Jaw MP30 with CR Jaw MP30 with PP Jaw MP30 with PS Jaw MP30 with S Jaw MP30 with TS Jaw	MP30 with CC Jaw MP30 with CR Jaw MP30 with PP Jaw MP30 with PS Jaw MP30 with S Jaw MP30 with TS Jaw	
Crusher	P325			
	P335	P335	P335	
Pulverizer	P225			
	P235	P325	P325	
Demolition and Sorting Grapple	G325B G330	G330	G330	
Mobile Scrap and Demolition Shear	S325B			
	S365C	S365C	S340 S365C	
Compactor (Vibratory Plate)	CVP110	CVP110	CVP110	
Contractors' Grapple	G130B			
Trash Grapple				
Thumbs				
Orange Peel Grapples				
Rakes				
Dedicated Quick Coupler				

These work tools are available for the 336D2 L.
Consult your Cat dealer for proper match.

* Offerings not available in all areas. Matches are dependent on excavator configurations. Consult your Cat dealer to determine what is offered in your area and for proper work tool match.

336D2 L Hydraulic Excavator Specifications

336D2 L Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		Mass Boom		
		mm	in	m ³	yd ³	kg	lb		6.5 m (21'4")		6.18 m (20'3")		
		Stick											
		HD R3.2 (10'6")		R3.2 (10'6")		M2.15 (7'1")			M2.55 (8'4")				
Shoes										600 mm (24") TG		600 mm (24") TG	
DB/TB Linkage Without Quick Coupler													
General Duty (GD)	DB	1350	53	1.64	2.14	1173	2,585	100%	●	●			
	DB	1500	60	1.87	2.44	1350	2,976	100%	⊖	⊙			
	DB	1650	65	2.12	2.76	1352	2,979	100%	⊖	⊖			
	TB	1500	60	2.14	2.80	2092	4,612	100%			⊙	⊖	
	TB	1500	60	2.14	2.80	1872	4,126	100%			⊙	⊖	
	TB	1650	66	2.41	3.16	2027	4,468	100%			⊖	⊖	
General Duty (GDC)	DB	750	30	0.94	1.23	952	2,099	100%	●	●			
	DB	900	36	1.19	1.56	1040	2,292	100%	●	●			
	DB	1050	42	1.46	1.91	1147	2,528	100%	●	●			
	DB	1200	48	1.73	2.26	1232	2,716	100%	⊙	●			
	DB	1350	54	2.00	2.62	1342	2,957	100%	⊖	⊖			
	DB	1500	60	2.27	2.98	1451	3,197	100%	○	⊖			
	DB	1650	66	2.55	3.33	1536	3,386	100%	○	○			
Heavy Duty (HD)	DB	750	30	0.73	0.95	1031	2,273	100%	●	●			
	DB	900	36	0.95	1.24	1178	2,595	100%	●	●			
	DB	1050	42	1.17	1.54	1267	2,793	100%	●	●			
	DB	1200	48	1.40	1.84	1398	3,080	100%	●	●			
	DB	1350	54	1.64	2.14	1481	3,265	100%	⊙	⊙			
	DB	1350	54	1.64	2.14	1459	3,215	100%	⊙	⊙			
	DB	1400	55	1.64	2.14	1460	3,219	100%	⊙	⊙			
	DB	1500	60	1.88	2.46	1600	3,526	100%	⊖	⊖			
	DB	1500	60	1.88	2.46	1566	3,452	100%	⊖	⊖			
	DB	1550	61	1.88	2.46	1553	3,424	100%	⊖	⊖			
	DB	1550	61	1.88	2.46	1585	3,492	100%	⊖	⊖			
	DB	1650	66	2.14	2.80	1730	3,814	100%	○	○			
	DB	1650	66	2.12	2.77	1697	3,740	100%	○	○			
	DB	1700	67	2.12	2.77	1647	3,630	100%	○	⊖			
	TB	1650	66	2.41	3.16	2210	4,871	100%			⊖	○	
	TB	1650	66	2.41	3.16	2259	4,979	100%			⊖	○	
	TB	1750	70	2.60	3.40	2240	4,936	100%			⊖	○	
Maximum load pin-on (payload + bucket)									kg	4510	4699	6073	5482
									lb	9,940	10,357	13,385	12,082

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

The above loads are in compliance with hydraulic excavator standard EN474, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

336D2 L Hydraulic Excavator Specifications

336D2 L Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		Mass Boom	
									6.5 m (21'4")		6.18 m (20'3")	
									Stick			
									HD R3.2 (10'6")	R3.2 (10'6")	M2.15 (7'1")	M2.55 (8'4")
								Shoes				
		mm	in	m ³	yd ³	kg	lb	%	600 mm (24") TG	600 mm (24") TG	600 mm (24") TG	600 mm (24") TG
DB/TB Linkage Without Quick Coupler												
Severe Duty (SD)	DB	750	30	0.73	0.95	1096	2,415	90%	●	●		
	DB	900	36	0.95	1.24	1252	2,760	90%	●	●		
	DB	1050	42	1.17	1.54	1353	2,981	90%	●	●		
	DB	1200	48	1.40	1.84	1493	3,292	90%	●	●		
	DB	1350	54	1.64	2.14	1599	3,524	90%	⊙	●		
	DB	1400	56	1.64	2.14	1643	3,622	90%	⊙	●		
	DB	1550	62	1.88	2.46	1787	3,939	90%	⊖	⊙		
	DB	1650	66	2.12	2.80	1827	4,028	90%	○	⊖		
	TB	1350	55	1.87	2.44	2065	4,551	90%			●	●
	TB	1400	56	1.87	2.44	2218	4,890	90%			●	⊙
	TB	1550	61	2.14	2.80	2170	4,783	90%			●	⊙
	TB	1650	66	2.41	3.16	2541	5,602	90%			⊖	○
	TB	1700	67	2.41	3.16	2409	5,309	90%			⊖	○
	TB	1700	67	2.41	3.16	2385	5,257	90%			⊖	⊖
	TB	1850	74	2.69	3.52	2726	6,008	90%			○	◇
	TB	1900	75	2.78	3.64	2750	6,061	90%			○	◇
TB	1900	75	2.78	3.64	2716	5,986	90%			○	◇	
Extreme Duty (XD)	DB	1350	54	1.64	2.14	1804	3,976	90%	⊙	⊙		
Severe Duty Power (SDP)	TB	1750	69	2.40	3.14	2454	5,410	90%			⊖	○
Severe Duty Power Spade (SDPV)	TB	1750	69	2.40	3.14	2522	5,560	90%			⊖	○
Extreme Duty Power (XDP)	TB	1550	61	2.00	2.59	2516	5,545	90%			⊙	⊖
Maximum load pin-on (payload + bucket)								kg	4510	4699	6073	5482
								lb	9,940	10,357	13,385	12,082

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

The above loads are in compliance with hydraulic excavator standard EN474, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

336D2 L Hydraulic Excavator Specifications

336D2 L Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		Mass Boom	
									6.5 m (21'4")		6.18 m (20'3")	
						Stick						
		mm	in	m ³	yd ³	kg	lb		%	HD R3.2 (10'6")	R3.2 (10'6")	M2.15 (7'1")
				Shoes				600 mm (24") TG	600 mm (24") TG	600 mm (24") TG	600 mm (24") TG	
With Quick Coupler (CW45, CW45s)												
General Duty (GD)	DB	1050	41	1.17	1.53	986	2,172	100%	●	●		
	DB	1200	47	1.40	1.83	1064	2,345	100%	●	●		
	DB	1350	53	1.64	2.14	1143	2,519	100%	⊙	⊙		
	DB	1500	59	1.87	2.45	1245	2,745	100%	⊖	⊖		
	DB	1650	65	2.11	2.76	1324	2,918	100%	○	○		
Heavy Duty (HD)	DB	1350	54	1.64	2.14	1417	3,122	100%	⊖	⊖		
	DB	1500	60	1.88	2.46	1514	3,337	100%	○	⊖		
	DB	1650	66	2.14	2.80	1647	3,629	100%	◇	○		
	TB	1650	66	2.41	3.16	2117	4,666	100%			⊖	○
Severe Duty (SD)	DB	1050	42	1.17	1.54	1272	2,803	90%	●	●		
	DB	1650	66	2.14	2.80	1802	3,971	90%	○	○		
	TB	1350	54	1.87	2.44	1974	4,351	90%			●	⊙
	TB	1650	66	2.41	3.16	2295	5,058	90%			⊖	○
Maximum load with coupler (payload + bucket)								kg	4020	4209	5583	4992
								lb	8,860	9,277	12,305	11,002

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

The above loads are in compliance with hydraulic excavator standard EN474, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.



Standard Equipment

Standard equipment may vary. Consult your Cat dealer for details.

ENGINE

- Cat C9 ACERT engine
- Meets Tier 3/Stage IIIA equivalent and Brazil MAR-1 emission standards
- 2300 m (7,546 ft) altitude capability
- Radial seal air filters (primary and secondary filter)
- Automatic engine speed control with one touch low idle
- High ambient cooling package 48° C (118° F)
- Water separator with water level indicator sensor
- Waved fin radiator with space for cleaning
- Two-speed travel
- Electric priming pump
- Fuel pressure differential gauge
- Air prefilter

HYDRAULIC SYSTEM

- Regeneration circuits for boom and stick
- Auxiliary hydraulic valve
- Reverse swing damping valve
- Automatic swing parking brake
- Boom drift reducing valve
- Boom lowering device for back-up
- Stick drift reducing valve
- Straight travel hydraulic circuit
- High performance hydraulic return filters

CAB

- ROPS (Roll Over Protective Structure) cab
- Adjustable armrest
- Retractable seat belt (51 mm [2 in] width)
- 70/30 split front windshield
- Laminated upper front windshield and tempered other windows
- Sliding upper door window
- Openable front windshield with assist device
- Windshield wiper and washer
- Bi-level air conditioner (automatic) with defroster (pressurized function)
- Color LCD display with warning, filter/fluid change, and working hour information
- Control lever joysticks
- Neutral lever (lock out) for all controls
- Travel control pedals with removable hand levers
- AM/FM radio
- 12V – 2× maximum 10A power supply
- Two stereo speakers
- Beverage holder
- Coat hook
- Openable roof hatch
- Washable floor mat
- Sunscreen

UNDERCARRIAGE

- Idler and center section track guiding guard
- Towing eye on base frame
- Grease lubricated track
- Swivel guard
- Heavy Duty travel motor guard

ELECTRICAL

- Batteries (×2)
- 65 amp alternator

LIGHTS

- Working lights, on cab, boom and storage box
- Interior lighting

SAFETY AND SECURITY

- Cat one key security system
- Door and compartment locks
- Signaling/warning horn
- Rearview mirrors
- Fire wall between engine and pump compartment
- Emergency engine shutoff switch
- Emergency exit rear window
- Battery disconnect switch
- Bolt-on FOGS capability

COUNTERWEIGHT

- 6.0 mt (6.6 t) counterweight

TECHNOLOGY

- Cat Electronic Technician data link
- Cat Product Link™
- Rearview camera

336D2 L Optional Equipment

Optional Equipment

Optional equipment may vary. Consult your Cat dealer for details.

FRONT PARTS

- Heavy duty Reach boom – 6.5 m (21'4")
 - R3.2DB stick
 - R3.2DB HD stick
- Mass Excavation boom – 6.18 m (20'3")
 - M2.55TB stick
 - M2.15TB stick
- Bucket linkage
 - DB bucket linkage (with/without lifting eye)
 - TB bucket linkage (with/without lifting eye)
- CW dedicated quick coupler

UNDERCARRIAGE

- Heavy duty bottom guard
- Heavy duty swivel guard
- Full length track guiding guard
- FOGS (bolt-on)
- 600 mm, 700 mm, 800 mm (24 in, 28 in, 32 in) Triple Grouser tracks
- 600 mm Double Grouser HD tracks

HYDRAULICS

- Boom and stick high pressure lines
- Boom and stick medium pressure lines
- Boom, stick and bucket quick coupler lines
- Quick coupler circuit
- Bio-oil capability
- Control pattern quick changer

CAB

- Mechanical suspension seat, with head rest
- Air suspension seat, with head rest and seat heater
- Lunch box with cover

OTHER OPTIONAL EQUIPMENT

- Travel alarm
- Starting kit, cold weather, –32° C (–26° F)
- Electric refueling pump with auto shut off
- Jump start
- Cold start package

INTEGRATED TECHNOLOGIES

- Rearview camera

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

AEHQ8013 (03-2017)
(Brazil)

© 2017 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

