



Cat[®] Compaction Wheels

BACKHOE LOADERS
MINI EXCAVATORS

When backfilling trenches, Cat[®] Compaction Wheels are one attachment option that can be used to achieve desired compaction levels. Compaction wheels are available for all Cat mini excavators as well as all Cat backhoe loaders. The wheels are offered in multiple widths for each machine platform to cover a wide range of application requirements. Wheels feature tapered roller bearings and a tampered foot design with static pad rollers which allows for smooth operation and helps achieve a high degree of compaction. The open rim design allows the wheel to penetrate through the trench fill and compact the soil from the bottom up.

Features:

Tamper foot design with static pad rollers:

- Static pad rollers are best suitable for compacting cohesive soils and achieving a higher degree of compaction.

Tapered roller bearing:

- Provides smooth wheel operation and appropriate tool balance.

Engineered to withstand impact and thrust load demanded from machine:

- Designed to match to the machine platforms to withstand machine weights.

Standard backfill plate:

- Bolts on to the main tool interface to be used in collaboration with wheel to create smooth trench bottom.

Open rim design:

- Allows wheel to penetrate through the lift of trench fill and compact the soil up, rather than from the top down.

Compatibility


Model	Machine Compatibility
305 mm (12 in)	301.5, 301.6, 301.7 CR, 301.8, 302 CR, 302.7 CR, 303 CR, 303.5 CR, 304, 305 CR, 306 CR, 306.5, 307, 307.5, 308 CR, 309 CR, 310, 416, 420, 424, 426, 428, 430, 432, 434, 440, 444, 450
406 mm (16 in)	301.5, 301.6, 301.7 CR, 301.8, 302 CR, 302.7 CR, 303 CR, 303.5 CR, 304, 305 CR, 306 CR, 306.5
457 mm (18 in)	307, 307.5, 308 CR, 309 CR, 310, 416, 420, 424, 426, 428, 430, 432, 434, 440, 444, 450
559 mm (22 in)	301.5, 301.6, 301.7 CR, 301.8, 302 CR, 302.7 CR, 303 CR, 303.5 CR, 304, 305 CR, 306 CR, 306.5
610 mm (24 in)	307, 307.5, 308 CR, 309 CR, 310, 416, 420, 424, 426, 428, 430, 432, 434, 440, 444, 450
914 mm (36 in)	307, 307.5, 308 CR, 309 CR, 310, 450

Current production machines listed. Machine model availability and attachment vary by region. Contact your local Cat[®] dealer for exact compatibility and availability.



Cat® Compaction Wheels

Specifications

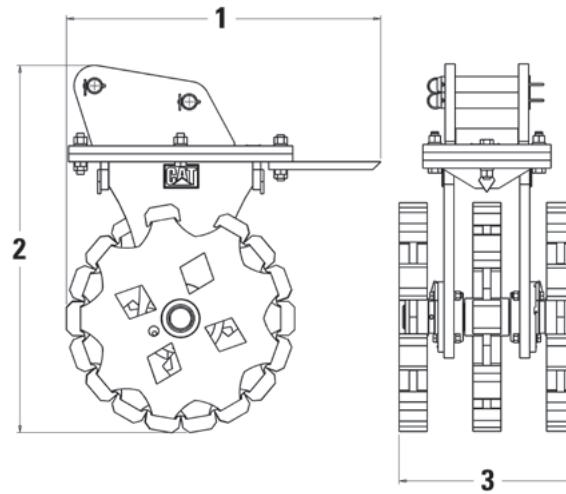

			305 mm	(12 in)	406 mm	(16 in)	457 mm	(18 in)
Weight	kg	(lb)	155-435	(342-959)	216-240	(476-529)	487-574	(1,074-1,266)
Compaction Width	mm	(in)	271-306	(11-12)	399	(16)	439, 449	(17, 18)
1 Length	mm	(in)	725-1014	(29-40)	693	(27)	991-1014	(39-40)
2 Height	mm	(in)	752-1276	(30-50)	792-961	(31-38)	1112-1284	(44-51)
3 Width	mm	(in)	292-398	(12-16)	399	(16)	439, 449	(17, 18)
Number of Wheels			2		3		3	
Total Number of Pads			16, 18		24		27	

			559 mm	(22 in)	610 mm	(24 in)	914 mm	(36 in)
Weight	kg	(lb)	258-273	(569-622)	518-593	(1,142-1,307)	882-899	(1,945-1,982)
Compaction Width	mm	(in)	553	(22)	556-559	(22)	884	(35)
1 Length	mm	(in)	693	(27)	991-1014	(39-40)	1073, 1091	(42, 43)
2 Height	mm	(in)	792-961	(31-38)	1110-1284	(44-51)	1164-1284	(46-51)
3 Width	mm	(in)	553	(22)	556-559	(22)	884	(35)
Number of Wheels			4		3		5	
Total Number of Pads			32		27		45	

For more complete information on Cat products, dealer services and industry solutions, visit us on the web at www.cat.com

© 2026 Caterpillar. All Rights Reserved.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ8074-01 (04-2026)
Replaces AEHQ8074-00
(Global)

