



336 GC

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

| | |
|--|-----------|
| Specifications | 2 |
| Engine | 2 |
| Swing Mechanism | 2 |
| Weights | 2 |
| Track | 2 |
| Drive | 2 |
| Hydraulic System | 2 |
| Service Refill Capacities | 2 |
| Standards | 2 |
| Sound Performance | 2 |
| Operating Weights and Ground Pressures | 3 |
| Major Component Weights | 3 |
| Dimensions | 4 |
| Working Ranges and Forces | 5 |
| Reach Boom Lift Capacities | 6 |
| Bucket Specifications and Compatibility | 10 |
| Attachments Offering Guide | 11 |
| Standard and Optional Equipment | 12 |
| Dealer Installed Kits and Attachments | 13 |

336 GC Hydraulic Excavator Specifications

Engine

| | | |
|--------------------------|-----------|---------------------|
| Engine Model | Cat® C7.1 | |
| Engine Power – ISO 9249 | 194 kW | 259 hp |
| Engine Power – SAE J1349 | 194 kW | 259 hp |
| Bore | 105 mm | 4 in |
| Stroke | 135 mm | 5 in |
| Displacement | 7.1 L | 433 in ³ |

- Equivalent to U.S. EPA Tier 3, EU Stage IIIA emission standards.
- Recommended for use up to 3300 m (10,830 ft) altitude with engine power derate above 2300 m (7,550 ft).
- Rating at 2,000 rpm.

Swing Mechanism

| | | |
|----------------------|----------|----------------|
| Swing Speed | 8.74 rpm | |
| Maximum Swing Torque | 137 kN·m | 101,168 lbf·ft |

Weights

| | | |
|------------------|-----------|-----------|
| Operating Weight | 34 800 kg | 76,700 lb |
|------------------|-----------|-----------|

- Long undercarriage, Reach boom, R3.2DB (10'6") stick, HD 1.88 m³ (2.46 yd³) bucket, 600 mm (24") triple grouser shoes, 6.8 mt (14,991 lb) counterweight.

Track

| | | |
|---------------------------------------|--------|-------|
| Standard Track Shoes Width | 600 mm | 24 in |
| Optional Track Shoes Width | 700 mm | 28 in |
| Optional Track Shoes Width | 800 mm | 31 in |
| Optional Track Shoes Width | 850 mm | 33 in |
| Number of Shoes (each side) | 49 | |
| Number of Track Rollers (each side) | 8 | |
| Number of Carrier Rollers (each side) | 2 | |

Drive

| | | |
|----------------------|----------|------------|
| Maximum Gradeability | 35°/70% | |
| Maximum Travel Speed | 4.7 km/h | 3 mph |
| Maximum Drawbar Pull | 297 kN | 66,656 lbf |

Hydraulic System

| | | |
|--|---------------------------------|----------------------------------|
| Main System – Maximum Flow – Implement | 559 L/min (279 × 2 pumps) | 148 gal/min (74 × 2 pumps) |
| Maximum Pressure – Equipment – Implement | 35 000 kPa | 5,076 psi |
| Maximum Pressure – Travel | 35 000 kPa | 5,076 psi |
| Maximum Pressure – Swing | 28 000 kPa | 4,061 psi |
| Boom Cylinder – Bore | 145 mm | 6 in |
| Boom Cylinder – Stroke | 1440 mm | 57 in |
| Stick Cylinder – Bore | 160 mm | 6 in |
| Stick Cylinder – Stroke | 1738 mm | 68 in |
| DB Bucket Cylinder – Bore | 145 mm | 6 in |
| DB Bucket Cylinder – Stroke | 1151 mm | 45 in |

Service Refill Capacities

| | | |
|-----------------------------------|-------|-----------|
| Fuel Tank Capacity | 600 L | 158.5 gal |
| Cooling System | 19 L | 4.9 gal |
| Engine Oil (with filter) | 20 L | 5.3 gal |
| Swing Drive (each) | 18 L | 4.8 gal |
| Final Drive (each) | 8 L | 2.1 gal |
| Hydraulic System (including tank) | 373 L | 98.5 gal |
| Hydraulic Tank | 161 L | 42.5 gal |

Standards

| | |
|-----------------|------------------|
| Brakes | ISO 10265:2008 |
| Cab/ROPS | ISO 12117-2:2008 |
| Cab | ISO 10262-1:1998 |
| FOGS (optional) | ISO 10262-2:1998 |

Sound Performance

| | |
|-----------------------|-----------|
| ISO 6395 (external) | 105 dB(A) |
| ISO 6396 (inside cab) | 72 dB(A) |

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

336 GC Hydraulic Excavator Specifications

Operating Weights and Ground Pressures

| | 600 mm (24") Triple Grouser Shoes | | 700 mm (28") Triple Grouser Shoes | | 800 mm (31") Triple Grouser Shoes | | 850 mm (33") Triple Grouser Shoes | |
|--|--------------------------------------|-----------------|--------------------------------------|-----------------|--------------------------------------|-----------------|--------------------------------------|-----------------|
| | Weight | Ground Pressure | Weight | Ground Pressure | Weight | Ground Pressure | Weight | Ground Pressure |
| | kg (lb) | kPa (psi) | kg (lb) | kPa (psi) | kg (lb) | kPa (psi) | kg (lb) | kPa (psi) |
| 6.8 mt (14,991 lb) Counterweight + Long Undercarriage Base Machine | | | | | | | | |
| Reach Boom + R3.2 m (10'6") DB Stick + 1.88 m ³ (2.46 yd ³) HD Bucket | 34 800 (76,700) | 71.9 (10.4) | 35 100 (77,500) | 62.3 (9.0) | 35 800 (78,900) | 55.5 (8.1) | 36 000 (79,400) | 55.8 (8.1) |
| Reach Boom + R2.8 m (9'2") DB Stick + 1.88 m ³ (2.46 yd ³) HD Bucket | 34 700 (76,500) | 71.7 (10.4) | 35 000 (77,200) | 62.1 (9.0) | 35 700 (78,700) | 55.3 (8.0) | 35 900 (79,100) | 55.7 (8.1) |

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.


Major Component Weights

| | kg | lb |
|--|--------|--------|
| Base machine with 6.8 mt (14,991 lb) counterweight, standard swing frame, base frame with standard track rollers and carrier rollers | 23 540 | 51,910 |
| Track Shoes: | | |
| 600 mm (24") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes | 4090 | 9,020 |
| 700 mm (28") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes | 4450 | 9,800 |
| 800 mm (31") Width, 13 mm (0.51") Thick, Triple Grouser Track Shoes | 5100 | 11,230 |
| 850 mm (33") Width, 13 mm (0.51") Thick, Triple Grouser Track Shoes | 5300 | 11,690 |
| Two Boom Cylinders | 560 | 1,240 |
| Weight of 90% Fuel Tank and 75 kg (165 lb) Operator | 550 | 1,210 |
| Counterweight: | | |
| 6.8 mt Counterweight | 6800 | 14,991 |
| Swing Frame: | | |
| Standard Swing Frame | 3160 | 6,960 |
| Standard Undercarriage: | | |
| Base Frame with Standard Track Rollers and Carrier Rollers | 8400 | 18,520 |
| Boom (including lines, pins, stick cylinder): | | |
| Reach Boom 6.5 m (21'4") | 3140 | 6,910 |
| Sticks (including lines, pins, bucket cylinder, bucket linkage): | | |
| Reach Stick R2.8DB (9'2") | 1650 | 3,650 |
| Reach Stick R3.2DB (10'6") | 1760 | 3,890 |
| Bucket (without linkage): | | |
| 1.88 m ³ (2.46 yd ³) HD | 1710 | 3,770 |
| Quick Coupler: | | |
| Pin Grabber QC | 700 | 1,550 |

336 GC Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

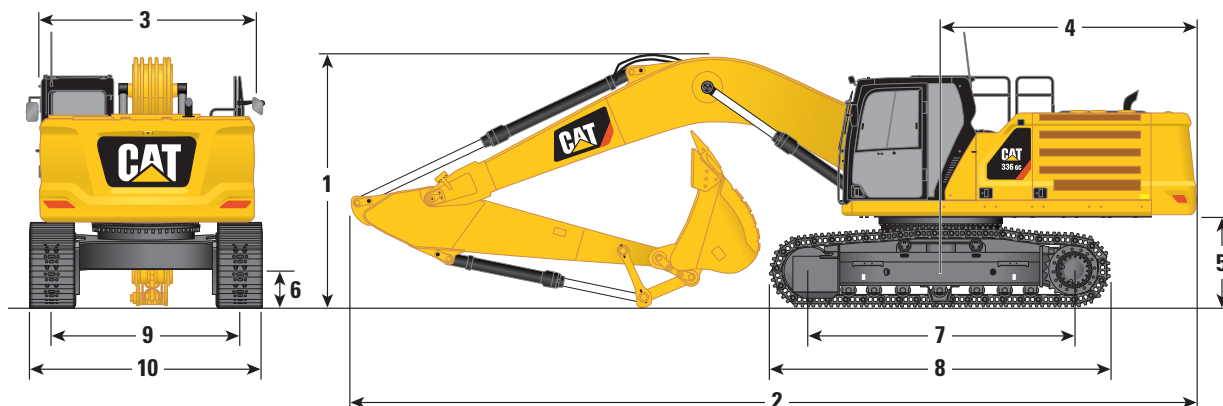

Boom Option

Reach Boom
6.5 m (21'4")

Stick Options

Reach Stick

R3.2DB (10'6")

R2.8DB (9'2")

1 Machine Height:

| | R3.2DB (10'6") | R2.8DB (9'2") |
|---|----------------|----------------|
| Cab Height | 3170 mm 10'4" | 3170 mm 10'4" |
| FOGS Height | 3310 mm 10'10" | 3310 mm 10'10" |
| Handrails Height | 3160 mm 10'4" | 3160 mm 10'4" |
| With Boom/Stick/Bucket Installed | 3470 mm 11'4" | 3660 mm 12'0" |
| With Boom/Stick Installed | 3330 mm 10'11" | 3450 mm 11'3" |
| With Boom Installed | 2880 mm 9'5" | 2880 mm 9'5" |
| With Boom/Stick/Bucket Installed (with auxiliary lines) | 3520 mm 11'6" | 3680 mm 12'0" |
| With Boom/Stick Installed (with auxiliary lines) | 3400 mm 11'1" | 3500 mm 11'5" |
| With Boom Installed (with auxiliary lines) | 2970 mm 9'8" | 2970 mm 9'8" |

2 Machine Length:

| | | |
|---|------------------|------------------|
| With Boom/Stick/Bucket Installed | 11 170 mm 36'7" | 11 220 mm 36'9" |
| With Boom/Stick Installed | 11 140 mm 36'6" | 11 190 mm 36'8" |
| With Boom Installed | 9960 mm 32'8" | 9960 mm 32'8" |
| With Boom/Stick/Bucket Installed (with auxiliary lines) | 11 170 mm 36'7" | 11 220 mm 36'9" |
| With Boom/Stick Installed (with auxiliary lines) | 11 140 mm 36'6" | 11 190 mm 36'8" |
| With Boom Installed (with auxiliary lines) | 10 010 mm 32'10" | 10 010 mm 32'10" |

3 Upperframe Width without Walkways

| | | |
|--|---------------|---------------|
| | 3030 mm 9'11" | 3030 mm 9'11" |
|--|---------------|---------------|

4 Tail Swing Radius

| | | |
|--|---------------|---------------|
| | 3530 mm 11'6" | 3530 mm 11'6" |
|--|---------------|---------------|

5 Counterweight Clearance

| | | |
|--|--------------|--------------|
| | 1250 mm 4'1" | 1250 mm 4'1" |
|--|--------------|--------------|

6 Ground Clearance

| | | |
|--|-------------|-------------|
| | 510 mm 1'8" | 510 mm 1'8" |
|--|-------------|-------------|

7 Length to Center of Rollers

| | | |
|--|---------------|---------------|
| | 4040 mm 13'3" | 4040 mm 13'3" |
|--|---------------|---------------|

8 Track Length

| | | |
|--|---------------|---------------|
| | 5030 mm 16'6" | 5030 mm 16'6" |
|--|---------------|---------------|

9 Track Gauge – Extended

| | | |
|--|--------------|--------------|
| | 2590 mm 8'5" | 2590 mm 8'5" |
|--|--------------|--------------|

10 Track Width/Undercarriage Width (with steps/without steps):

| | | |
|--------------------|---------------|---------------|
| 600 mm (24") Shoes | 3190 mm 10'5" | 3190 mm 10'5" |
| 700 mm (28") Shoes | 3290 mm 10'9" | 3290 mm 10'9" |
| 800 mm (31") Shoes | 3390 mm 11'1" | 3390 mm 11'1" |
| 850 mm (33") Shoes | 3440 mm 11'3" | 3440 mm 11'3" |

Bucket Type

HD


HD

| | | |
|-------------------|--|--|
| Bucket Capacity | 1.88 m ³ 2.46 yd ³ | 1.88 m ³ 2.46 yd ³ |
| Bucket Tip Radius | 1760 mm 5'9" | 1760 mm 5'9" |

336 GC Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

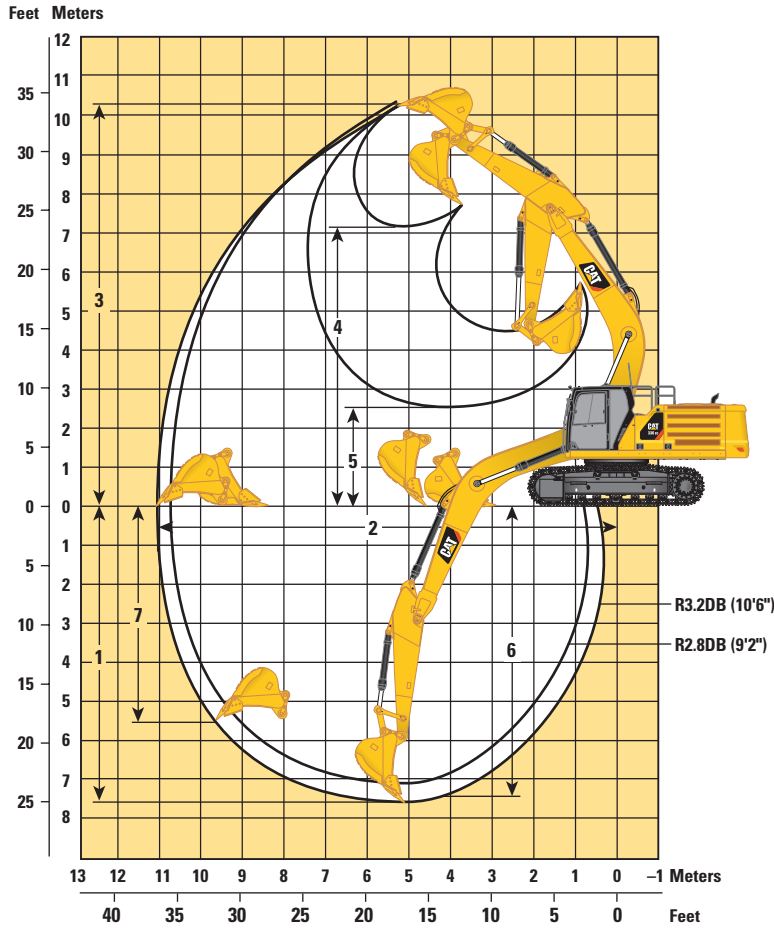

Boom Option

Reach Boom
6.5 m (21'4")




Stick Options

Reach Stick

| | R3.2DB (10'6") | | R2.8DB (9'2") | |
|--|---------------------|----------------------|---------------------|----------------------|
| | | | | |
| 1 Maximum Digging Depth | 7520 mm | 24'8" | 7120 mm | 23'4" |
| 2 Maximum Reach at Ground Line | 11 050 mm | 36'3" | 10 740 mm | 35'2" |
| 3 Maximum Cutting Height | 10 300 mm | 33'9" | 10 360 mm | 33'11" |
| 4 Maximum Loading Height | 7080 mm | 23'2" | 7080 mm | 23'2" |
| 5 Minimum Loading Height | 2580 mm | 8'5" | 2980 mm | 9'9" |
| 6 Maximum Depth Cut for 2240 mm (8'0") Level Bottom | 7360 mm | 24'1" | 6950 mm | 22'9" |
| 7 Maximum Vertical Wall Digging Depth | 5660 mm | 18'6" | 5620 mm | 18'5" |
| Bucket Digging Force (ISO) | 197 kN | 44,350 lbf | 197 kN | 44,350 lbf |
| Stick Digging Force (ISO) | 148 kN | 33,160 lbf | 164 kN | 36,890 lbf |
| Bucket Type | HD | | HD | |
| Bucket Capacity | 1.88 m ³ | 2.46 yd ³ | 1.88 m ³ | 2.46 yd ³ |
| Bucket Tip Radius | 1760 mm | 5'9" | 1760 mm | 5'9" |




336 GC Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|------------------|--------------------|------------------|------------------|----------------|------------------|----------------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | *6850 | *6850 | | | *5750 *12,700 | *5750 *12,700 | 7700 300 |
| 6000 mm 240 in | kg lb | | | | | | | *7500 *16,350 | 7300 15,700 | | | *5550 *12,250 | *5550 *12,250 | 8580 340 |
| 4500 mm 180 in | kg lb | | | *11 450 | *11 450 | *9200 *19,850 | *9200 *19,850 | *8050 *17,450 | 7100 15,250 | *6600 | 5300 | *5600 *12,350 | 5200 11,450 | 9130 360 |
| 3000 mm 120 in | kg lb | | | *14 450 *31,050 | 14 200 30,700 | *10 600 *22,950 | 9400 20,300 | *8750 *19,050 | 6800 14,700 | *7750 *16,900 | 5200 11,150 | *5850 *12,800 | 4850 10,650 | 9410 370 |
| 1500 mm 60 in | kg lb | | | *16 650 *35,900 | 13 350 28,750 | *11 900 *25,700 | 8950 19,250 | *9500 *20,550 | 6550 14,150 | 7900 16,950 | 5050 10,900 | *6250 *13,700 | 4700 10,400 | 9440 380 |
| 0 mm 0 in | kg lb | | | *17 350 *37,600 | 13 000 27,900 | *12 600 *27,300 | 8650 18,600 | *9950 *21,550 | 6350 13,700 | 7800 16,750 | 4950 10,700 | *6950 *15,250 | 4800 10,550 | 9220 370 |
| -1500 mm -60 in | kg lb | *11 700 *26,500 | *11 700 *26,500 | *17 000 *36,850 | 12 900 27,750 | *12 700 *27,500 | 8500 18,350 | *9950 *21,550 | 6300 13,550 | | | 8100 17,850 | 5150 11,350 | 8750 350 |
| -3000 mm -120 in | kg lb | *18 500 *41,900 | *18 500 *41,900 | *15 750 *34,150 | 13 000 27,950 | *12 000 *25,900 | 8550 18,400 | *9300 *19,900 | 6350 13,650 | | | *8500 *18,650 | 5900 13,000 | 7960 320 |
| -4500 mm -180 in | kg lb | *17 700 *38,150 | *17 700 *38,150 | *13 350 *28,650 | 13 300 28,600 | *10 100 *21,500 | 8750 18,900 | | | | | *8500 *18,700 | 7500 16,750 | 6750 270 |

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|------------------|----------------|------------------|----------------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | *6850 | *6850 | | | *5750 *12,700 | *5750 *12,700 | 7700 300 |
| 6000 mm 240 in | kg lb | | | | | | | *7500 *16,350 | 7350 15,800 | | | *5550 *12,250 | *5550 *12,250 | 8580 340 |
| 4500 mm 180 in | kg lb | | | *11 450 | *11 450 | *9200 *19,850 | *9200 *19,850 | *8050 *17,450 | 7150 15,400 | *6600 | 5350 | *5600 *12,350 | 5250 11,550 | 9130 360 |
| 3000 mm 120 in | kg lb | | | *14 450 *31,050 | 14 350 30,950 | *10 600 *22,950 | 9500 20,450 | *8750 *19,050 | 6900 14,800 | *7750 *16,900 | 5250 11,250 | *5850 *12,800 | 4900 10,750 | 9410 370 |
| 1500 mm 60 in | kg lb | | | *16 650 *35,900 | 13 450 29,000 | *11 900 *25,700 | 9000 19,450 | *9500 *20,550 | 6600 14,250 | 7950 17,150 | 5100 11,000 | *6250 *13,700 | 4750 10,500 | 9440 380 |
| 0 mm 0 in | kg lb | | | *17 350 *37,600 | 13 100 28,200 | *12 600 *27,300 | 8700 18,800 | *9950 *21,550 | 6450 13,850 | 7850 16,950 | 5000 10,800 | *6950 *15,250 | 4850 10,700 | 9220 370 |
| -1500 mm -60 in | kg lb | *11 700 *26,500 | *11 700 *26,500 | *17 000 *36,850 | 13 000 28,000 | *12 700 *27,500 | 8600 18,500 | *9950 *21,550 | 6350 13,650 | | | *8100 *17,900 | 5200 11,450 | 8750 350 |
| -3000 mm -120 in | kg lb | *18 500 *41,900 | *18 500 *41,900 | *15 750 *34,150 | 13 150 28,250 | *12 000 *25,900 | 8600 18,550 | *9300 *19,900 | 6400 13,800 | | | *8500 *18,650 | 5950 13,150 | 7960 320 |
| -4500 mm -180 in | kg lb | *17 700 *38,150 | *17 700 *38,150 | *13 350 *28,650 | *13 350 *28,650 | *10 100 *21,500 | 8850 19,050 | | | | | *8500 *18,700 | 7550 16,950 | 6750 270 |



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 GC Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|------------------|----------------|------------------|----------------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | *6850 | *6850 | | | *5750 *12,700 | *5750 *12,700 | 7700 300 |
| 6000 mm 240 in | kg lb | | | | | | | *7500 *16,350 | 7450 16,050 | | | *5550 *12,250 | *5550 *12,250 | 8580 340 |
| 4500 mm 180 in | kg lb | | | *11 450 | *11 450 | *9200 *19,850 | *9200 *19,850 | *8050 *17,450 | 7250 15,600 | *6600 | 5450 | *5600 *12,350 | 5300 11,750 | 9130 360 |
| 3000 mm 120 in | kg lb | | | *14 450 *31,050 | *14 450 *31,050 | *10 600 *22,950 | 9650 20,750 | *8750 *19,050 | 7000 15,050 | *7750 *16,900 | 5350 11,450 | *5850 *12,800 | 4950 10,950 | 9410 370 |
| 1500 mm 60 in | kg lb | | | *16 650 *35,900 | 13 700 29,500 | *11 900 *25,700 | 9150 19,750 | *9500 *20,550 | 6750 14,500 | *8100 17,450 | 5200 11,200 | *6250 *13,700 | 4850 10,650 | 9440 380 |
| 0 mm 0 in | kg lb | | | *17 350 *37,600 | 13 300 28,650 | *12 600 *27,300 | 8850 19,100 | *9950 *21,550 | 6550 14,100 | 8000 17,250 | 5100 11,000 | *6950 *15,250 | 4950 10,850 | 9220 370 |
| -1500 mm -60 in | kg lb | *11 700 *26,500 | *11 700 *26,500 | *17 000 *36,850 | 13 250 28,450 | *12 700 *27,500 | 8750 18,800 | *9950 *21,550 | 6450 13,900 | | | *8100 *17,900 | 5300 11,650 | 8750 350 |
| -3000 mm -120 in | kg lb | *18 500 *41,900 | *18 500 *41,900 | *15 750 *34,150 | 13 350 28,700 | *12 000 *25,900 | 8750 18,900 | *9300 *19,900 | 6500 14,000 | | | *8500 *18,650 | 6050 13,350 | 7960 320 |
| -4500 mm -180 in | kg lb | *17 700 *38,150 | *17 700 *38,150 | *13 350 *28,650 | *13 350 *28,650 | *10 100 *21,500 | 9000 19,400 | | | | | *8500 *18,700 | 7700 17,200 | 6750 270 |

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|------------------|-----------------|------------------|----------------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | *6850 | *6850 | | | *5750 *12,700 | *5750 *12,700 | 7700 300 |
| 6000 mm 240 in | kg lb | | | | | | | *7500 *16,350 | *7500 16,100 | | | *5550 *12,250 | *5550 *12,250 | 8580 340 |
| 4500 mm 180 in | kg lb | | | *11 450 | *11 450 | *9200 *19,850 | *9200 *19,850 | *8050 *17,450 | 7300 15,700 | *6600 | 5450 | *5600 *12,350 | 5350 11,800 | 9130 360 |
| 3000 mm 120 in | kg lb | | | *14 450 *31,050 | *14 450 *31,050 | *10 600 *22,950 | 9700 20,850 | *8750 *19,050 | 7050 15,150 | *7750 *16,900 | 5350 11,500 | *5850 *12,800 | 5000 11,000 | 9410 370 |
| 1500 mm 60 in | kg lb | | | *16 650 *35,900 | 13 750 29,650 | *11 900 *25,700 | 9200 19,850 | *9500 *20,550 | 6750 14,600 | *8100 17,550 | 5250 11,250 | *6250 *13,700 | 4900 10,750 | 9440 380 |
| 0 mm 0 in | kg lb | | | *17 350 *37,600 | 13 400 28,800 | *12 600 *27,300 | 8900 19,200 | *9950 *21,550 | 6600 14,150 | 8050 17,350 | 5150 11,050 | *6950 *15,250 | 4950 10,950 | 9220 370 |
| -1500 mm -60 in | kg lb | *11 700 *26,500 | *11 700 *26,500 | *17 000 *36,850 | 13 300 28,600 | *12 700 *27,500 | 8800 18,900 | *9950 *21,550 | 6500 14,000 | | | *8100 *17,900 | 5300 11,700 | 8750 350 |
| -3000 mm -120 in | kg lb | *18 500 *41,900 | *18 500 *41,900 | *15 750 *34,150 | 13 400 28,850 | *12 000 *25,900 | 8800 19,000 | *9300 *19,900 | 6550 14,100 | | | *8500 *18,650 | 6050 13,450 | 7960 320 |
| -4500 mm -180 in | kg lb | *17 700 *38,150 | *17 700 *38,150 | *13 350 *28,650 | *13 350 *28,650 | *10 100 *21,500 | 9000 19,500 | | | | | *8500 *18,700 | 7750 17,300 | 6750 270 |



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 GC Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|--------------------|----------------|----------------|------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | | | | | *7300 *16,150 | *7300 *16,150 | 7340 290 |
| 6000 mm 240 in | kg lb | | | | | *8550 *18,550 | *8550 *18,550 | *7950 *17,400 | 7250 15,550 | | | *7000 *15,450 | 6200 13,750 | 8250 330 |
| 4500 mm 180 in | kg lb | | | *12 350 *26,450 | *12 350 *26,450 | *9700 *21,000 | *9700 *21,000 | *8400 *18,350 | 7050 15,200 | | | *7000 *15,450 | 5450 12,100 | 8820 350 |
| 3000 mm 120 in | kg lb | | | *15 350 *32,900 | 14 000 30,250 | *11 100 *23,950 | 9350 20,150 | *9100 *19,750 | 6800 14,650 | 8050 | 5200 | *7250 *15,950 | 5100 11,250 | 9110 360 |
| 1500 mm 60 in | kg lb | | | *14 100 *34,300 | 13 250 28,600 | *12 250 *26,450 | 8900 19,250 | *9750 *21,100 | 6600 14,150 | 7900 | 5100 | *7700 *17,000 | 5000 10,950 | 9140 360 |
| 0 mm 0 in | kg lb | | | *16 550 *37,800 | 13 050 28,050 | *12 800 *27,700 | 8650 18,700 | *10 100 *21,850 | 6400 13,800 | | | 7950 17,500 | 5100 11,200 | 8920 350 |
| -1500 mm -60 in | kg lb | *10 950 *24,900 | *10 950 *24,900 | *16 800 *36,450 | 13 000 28,000 | *12 700 *27,450 | 8600 18,500 | *9950 *21,500 | 6350 13,700 | | | *8550 *18,850 | 5500 12,100 | 8420 340 |
| -3000 mm -120 in | kg lb | *19 750 *43,650 | *19 750 *43,650 | *15 300 *33,100 | 13 150 28,350 | *11 750 *25,300 | 8650 18,650 | *8900 | 6450 | | | *8700 *19,100 | 6350 14,050 | 7600 300 |
| -4500 mm -180 in | kg lb | *16 000 *34,450 | *16 000 *34,450 | *12 450 *26,650 | *12 450 *26,650 | *9250 *19,400 | 8950 19,300 | | | | | *8450 *18,550 | 8350 *18,550 | 6330 250 |

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|--------------------|----------------|----------------|------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | | | | | *7300 *16,150 | *7300 *16,150 | 7340 290 |
| 6000 mm 240 in | kg lb | | | | | *8550 *18,550 | *8550 *18,550 | *7950 *17,400 | 7300 15,700 | | | *7000 *15,450 | 6250 13,850 | 8250 330 |
| 4500 mm 180 in | kg lb | | | *12 350 *26,450 | *12 350 *26,450 | *9700 *21,000 | *9700 *21,000 | *8400 *18,350 | 7100 15,300 | | | *7000 *15,450 | 5500 12,200 | 8820 350 |
| 3000 mm 120 in | kg lb | | | *15 350 *32,900 | 14 150 30,500 | *11 100 *23,950 | 9450 20,350 | *9100 *19,750 | 6850 14,800 | *8050 | 5250 | *7250 *15,950 | 5150 11,350 | 9110 360 |
| 1500 mm 60 in | kg lb | | | *14 100 *34,300 | 13 400 28,850 | *12 250 *26,450 | 9000 19,400 | *9750 *21,100 | 6650 14,300 | 8000 | 5150 | *7700 *17,000 | 5050 11,050 | 9140 360 |
| 0 mm 0 in | kg lb | | | *16 550 *37,800 | 13 150 28,300 | *12 800 *27,700 | 8750 18,850 | *10 100 *21,850 | 6500 13,950 | | | 8050 17,700 | 5150 11,300 | 8920 350 |
| -1500 mm -60 in | kg lb | *10 950 *24,900 | *10 950 *24,900 | *16 800 *36,450 | 13 150 28,250 | *12 700 *27,450 | 8650 18,700 | *9950 *21,500 | 6400 13,850 | | | *8550 *18,850 | 5550 12,200 | 8420 340 |
| -3000 mm -120 in | kg lb | *19 750 *43,650 | *19 750 *43,650 | *15 300 *33,100 | 13 300 28,600 | *11 750 *25,300 | 8750 18,850 | *8900 | 6500 | | | *8700 *19,100 | 6400 14,200 | 7600 300 |
| -4500 mm -180 in | kg lb | *16 000 *34,450 | *16 000 *34,450 | *12 450 *26,650 | *12 450 *26,650 | *9250 *19,400 | 9000 19,400 | | | | | *8450 *18,550 | 8450 *18,550 | 6330 250 |



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 GC Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|--------------------|----------------|----------------|------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | | | | | *7300 *16,150 | *7300 *16,150 | 7340 290 |
| 6000 mm 240 in | kg lb | | | | | *8550 *18,550 | *8550 *18,550 | *7950 *17,400 | 7400 15,950 | | | *7000 *15,450 | 6350 14,100 | 8250 330 |
| 4500 mm 180 in | kg lb | | | *12 350 *26,450 | *12 350 *26,450 | *9700 *21,000 | *9700 *21,000 | *8400 *18,350 | 7250 15,550 | | | *7000 *15,450 | 5600 12,400 | 8820 350 |
| 3000 mm 120 in | kg lb | | | *15 350 *32,900 | 14 350 30,950 | *11 100 *23,950 | 9550 20,650 | *9100 *19,750 | 7000 15,050 | *8050 | 5350 | *7250 *15,950 | 5250 11,550 | 9110 360 |
| 1500 mm 60 in | kg lb | | | *14 100 *34,300 | 13 600 29,350 | *12 250 *26,450 | 9150 19,750 | *9750 *21,100 | 6750 14,550 | 8150 | 5250 | *7700 *17,000 | 5100 11,250 | 9140 360 |
| 0 mm 0 in | kg lb | | | *16 550 *37,800 | 13 350 28,750 | *12 800 *27,700 | 8900 19,200 | *10 100 *21,850 | 6600 14,200 | | | 8150 18,000 | 5250 11,500 | 8920 350 |
| -1500 mm -60 in | kg lb | *10 950 *24,900 | *10 950 *24,900 | *16 800 *36,450 | 13 350 28,750 | *12 700 *27,450 | 8800 19,000 | *9950 *21,500 | 6550 14,100 | | | *8550 *18,850 | 5650 12,400 | 8420 340 |
| -3000 mm -120 in | kg lb | *19 750 *43,650 | *19 750 *43,650 | *15 300 *33,100 | 13 500 29,050 | *11 750 *25,300 | 8900 19,150 | *8900 | 6650 | | | *8700 *19,100 | 6550 14,450 | 7600 300 |
| -4500 mm -180 in | kg lb | *16 000 *34,450 | *16 000 *34,450 | *12 450 *26,650 | *12 450 *26,650 | *9250 *19,400 | 9150 *19,400 | | | | | *8450 *18,550 | *8450 *18,550 | 6330 250 |

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket



| | | 3000 mm/120 in | | 4500 mm/180 in | | 6000 mm/240 in | | 7500 mm/300 in | | 9000 mm/360 in | | mm in | | |
|---------------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|--------------------|----------------|----------------|------|------------------|------------------|-------------|
| | | | | | | | | | | | | | | |
| 7500 mm 300 in | kg lb | | | | | | | | | | | *7300 *16,150 | *7300 *16,150 | 7340 290 |
| 6000 mm 240 in | kg lb | | | | | *8550 *18,550 | *8550 *18,550 | *7950 *17,400 | 7450 16,000 | | | *7000 *15,450 | 6350 14,150 | 8250 330 |
| 4500 mm 180 in | kg lb | | | *12 350 *26,450 | *12 350 *26,450 | *9700 *21,000 | *9700 *21,000 | *8400 *18,350 | 7250 15,650 | | | *7000 *15,450 | 5650 12,450 | 8820 350 |
| 3000 mm 120 in | kg lb | | | *15 350 *32,900 | 14 400 31,100 | *11 100 *23,950 | 9600 20,750 | *9100 *19,750 | 7000 15,100 | *8050 | 5350 | *7250 *15,950 | 5250 11,600 | 9110 360 |
| 1500 mm 60 in | kg lb | | | *14 100 *34,300 | 13 700 29,500 | *12 250 *26,450 | 9200 19,850 | *9750 *21,100 | 6800 14,600 | 8200 | 5250 | *7700 *17,000 | 5150 11,300 | 9140 360 |
| 0 mm 0 in | kg lb | | | *16 550 *37,800 | 13 450 28,900 | *12 800 *27,700 | 8950 19,300 | *10 100 *21,850 | 6650 14,250 | | | 8200 18,100 | 5250 11,600 | 8920 350 |
| -1500 mm -60 in | kg lb | *10 950 *24,900 | *10 950 *24,900 | *16 800 *36,450 | 13 450 28,900 | *12 700 *27,450 | 8850 19,100 | *9950 *21,500 | 6550 14,150 | | | *8550 *18,850 | 5650 12,500 | 8420 340 |
| -3000 mm -120 in | kg lb | *19 750 *43,650 | *19 750 *43,650 | *15 300 *33,100 | 13 600 29,200 | *11 750 *25,300 | 8950 19,250 | *8900 | 6650 | | | *8700 *19,100 | 6550 14,550 | 7600 300 |
| -4500 mm -180 in | kg lb | *16 000 *34,450 | *16 000 *34,450 | *12 450 *26,650 | *12 450 *26,650 | *9250 *19,400 | 9200 *19,400 | | | | | *8450 *18,550 | *8450 *18,550 | 6330 250 |



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 GC Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

| | Linkage | Width | | Capacity | | Weight | | Fill % | 6.8 mt (14,991 lb) Counterweight | |
|--|---------|-------|----|----------------|-----------------|--------|-------|-----------|----------------------------------|--------------|
| | | mm | in | m ³ | yd ³ | kg | lb | | Reach Boom | |
| | | | | | | | | | R2.8 (9'2") | R3.2 (10'6") |
| Pin-On (No Quick Coupler) | | | | | | | | | | |
| Heavy Duty | DB | 750 | 30 | 0.73 | 0.95 | 1007 | 2,220 | 100 | ● | ● |
| | DB | 1050 | 42 | 1.17 | 1.54 | 1245 | 2,744 | 100 | ● | ● |
| | DB | 1200 | 48 | 1.40 | 1.83 | 1377 | 3,035 | 100 | ● | ● |
| | DB | 1350 | 54 | 1.64 | 2.14 | 1473 | 3,247 | 100 | ● | ● |
| | DB | 1500 | 60 | 1.88 | 2.46 | 1605 | 3,538 | 100 | ⊙ | ⊙ |
| | DB | 1650 | 66 | 2.12 | 2.77 | 1737 | 3,829 | 100 | ⊖ | ⊖ |
| | DB | 1850 | 72 | 2.36 | 3.09 | 1834 | 4,043 | 100 | ⊖ | ○ |
| Severe Duty | DB | 1200 | 48 | 1.40 | 1.83 | 1452 | 3,201 | 90 | ● | ● |
| Ditch Cleaning | DB | 1800 | 72 | 1.96 | 2.56 | 1034 | 2,280 | 100 | ● | ● |
| Clean Up | DB | 1800 | 72 | 2.48 | 3.24 | 1331 | 2,934 | 100 | ⊖ | ⊖ |
| | DB | 2000 | 78 | 2.74 | 3.58 | 1417 | 3,124 | 100 | ○ | ○ |
| Heavy Duty | TB | 1650 | 65 | 2.41 | 3.15 | 2377 | 5,240 | 100 | | |
| | TB | 1850 | 72 | 2.69 | 3.52 | 2377 | 5,240 | 100 | | |
| Maximum load with pin-on (payload + bucket) | | | | | | | | kg | 5280 | 4970 |
| | | | | | | | | lb | 11,640 | 10,957 |
| With Cat Pin Grabber Coupler | | | | | | | | | | |
| Heavy Duty | DB | 750 | 30 | 0.73 | 0.95 | 1007 | 2,220 | 100 | ● | ● |
| | DB | 1050 | 42 | 1.17 | 1.54 | 1245 | 2,744 | 100 | ● | ● |
| | DB | 1200 | 48 | 1.40 | 1.83 | 1377 | 3,035 | 100 | ● | ● |
| | DB | 1350 | 54 | 1.64 | 2.14 | 1473 | 3,247 | 100 | ⊙ | ⊖ |
| | DB | 1500 | 60 | 1.88 | 2.46 | 1605 | 3,538 | 100 | ⊖ | ○ |
| | DB | 1650 | 66 | 2.12 | 2.77 | 1737 | 3,829 | 100 | ○ | ○ |
| | DB | 1850 | 72 | 2.36 | 3.09 | 1834 | 4,043 | 100 | ○ | ◇ |
| Severe Duty | DB | 1200 | 48 | 1.40 | 1.83 | 1452 | 3,201 | 90 | ● | ● |
| Ditch Cleaning | DB | 1800 | 72 | 1.96 | 2.56 | 1034 | 2,280 | 100 | ⊙ | ⊖ |
| Clean Up | DB | 1800 | 72 | 2.48 | 3.24 | 1331 | 2,934 | 100 | ○ | ○ |
| | DB | 2000 | 78 | 2.74 | 3.58 | 1417 | 3,124 | 100 | ○ | ◇ |
| Heavy Duty | TB | 1650 | 65 | 2.41 | 3.15 | 2377 | 5,240 | 100 | | |
| | TB | 1850 | 72 | 2.69 | 3.52 | 2377 | 5,240 | 100 | | |
| Maximum load with coupler (payload + bucket) | | | | | | | | kg | 4582 | 4272 |
| | | | | | | | | lb | 10,102 | 9,419 |

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

336 GC Hydraulic Excavator Specifications

Attachments Offering Guide

PIN-ON ATTACHMENTS

| Counterweight | | 6.8 mt (14,991 lb) | |
|------------------------------------|-----------|--------------------|---------------|
| Boom Type | | Reach Boom | |
| Stick Size | | 2.8 m (9'2") | 3.2 m (10'6") |
| Hydraulic Hammers | H140 GC | ✓ | ✓ |
| | H140 GC S | ✓ | ✓ |
| | H140E S | ✓ | ✓ |
| | H160E S | ✓ | ✓ |
| Demolition and Sorting Grapples | G325B | ✓ | ✓ |
| | G330 | ✓ | ✓ |
| Compactors (Vibratory Plate) | CVP110 | ✓ | ✓ |
| Mobile Scrap and Demolition Shears | S3035 | ✓ | ✓ |
| Rippers | | ✓ | ✓ |
| Cat Pin Grabber Couplers | | ✓ | ✓ |

CAT PIN GRABBER COUPLER ATTACHMENTS

| Counterweight | | 6.8 mt (14,991 lb) | |
|------------------------------------|-----------|--------------------|---------------|
| Boom Type | | Reach Boom | |
| Stick Size | | 2.8 m (9'2") | 3.2 m (10'6") |
| Hydraulic Hammers | H140 GC | ✓ | ✓ |
| | H140 GC S | ✓ | ✓ |
| | H140E S | ✓ | ✓ |
| | H160E S | ✓ | ✓ |
| Demolition and Sorting Grapples | G325B | ✓ | ✓ |
| | G330 | ✓* | |
| Compactors (Vibratory Plate) | CVP110 | ✓ | ✓ |
| Mobile Scrap and Demolition Shears | S3035 | ✓ | ✓ |
| Rippers | | ✓ | ✓ |

BOOM-MOUNTED ATTACHMENTS

| Counterweight | | 6.8 mt (14,991 lb) | |
|------------------------------------|-------|--------------------|----|
| Boom Type | | Reach Boom | |
| Mobile Scrap and Demolition Shears | S2090 | | ✓* |
| | S3050 | | ✓ |
| | S3070 | | ✓ |

*Working range front only.

336 GC Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

| | Standard | Optional | | Standard | Optional |
|---|----------|----------|---|----------|----------|
| CAB | | | ENGINE | | |
| ROPS, standard sound suppression | ✓ | | Two selectable modes: Power, Smart | ✓ | |
| High-resolution 203 mm (8") LCD touchscreen monitor | ✓ | | Automatic engine speed control | ✓ | |
| Automatic bi-level air conditioner | ✓ | | 52° C (126° F) high-ambient cooling capacity | ✓ | |
| Jog dial and shortcut keys for monitor control | ✓ | | Hydraulic reverse fan | | ✓ |
| Keyless push-to-start engine control | ✓ | | -18° C (0° F) cold start capability | ✓ | |
| Height-adjustable console, three steps with tool | ✓ | | Double element air filter with integrated precleaner | ✓ | |
| Fixed left-side console | ✓ | | Dual stage four micron main filter and 10 micron primary filter with water separator and water separator indicator switch | ✓ | |
| Mechanically adjustable seat suspension | ✓ | | Biodiesel capability up to B20 | ✓ | |
| 51 mm (2") orange seat belt | ✓ | | HYDRAULIC SYSTEM | | |
| Bluetooth integrated radio (no USB, aux port or microphone) | ✓ | | Boom and stick regeneration circuit | ✓ | |
| 12V DC outlets | ✓ | | Electronic main control valve | ✓ | |
| Document storage | ✓ | | Automatic hydraulic oil warm up | ✓ | |
| Cup and bottle holders | ✓ | | Bio hydraulic oil capability | ✓ | |
| Openable two-piece front window | ✓ | | Reverse swing damping valve | ✓ | |
| Upper radial wiper with washer | ✓ | | Automatic swing parking brake | ✓ | |
| Openable steel hatch | ✓ | | High performance hydraulic return filter | ✓ | |
| LED dome light | ✓ | | Two speed travel | ✓ | |
| Roller front sunscreen | ✓ | | Fine swing | ✓ | |
| Roller rear sunscreen | | ✓ | Straight travel pedal | ✓ | |
| Rear window emergency exit | ✓ | | Combined two-way auxiliary circuit | | ✓ |
| Washable floor mat | ✓ | | Medium-pressure auxiliary circuit | | ✓ |
| Beacon ready | ✓ | | Quick coupler circuit for Cat Pin Grabber and CW Dedicated | | ✓ |

(continued on next page)

336 GC Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

| | Standard | Optional | | Standard | Optional |
|--|----------|----------|--|----------|----------|
| UNDERCARRIAGE AND STRUCTURES | | | CAT TECHNOLOGY | | |
| Long undercarriage | ✓ | | Cat Product Link™ | ✓ | |
| Towing eye on base frame | ✓ | | Auto hammer stop | ✓ | |
| Track guiding guard, full length | | ✓ | SERVICE AND MAINTENANCE | | |
| Track guiding guard, center | | ✓ | Grouped location of engine oil and fuel filters | ✓ | |
| Bottom guard | ✓ | | Scheduled Oil Sampling (S·O·S SM) ports | ✓ | |
| Travel motor guard | ✓ | | QuickEvac™ maintenance ready | | ✓ |
| Grease lubricated track | ✓ | | SAFETY AND SECURITY | | |
| 6.8 mt (14,991 lb) counterweight | ✓ | | Caterpillar One Key security system | ✓ | |
| 600 mm (24") triple grouser track shoes | | ✓ | Lockable external tool/storage box | ✓ | |
| 700 mm (28") triple grouser track shoes | | ✓ | Lockable door, fuel, and hydraulic tank locks | ✓ | |
| 800 mm (31") triple grouser track shoes | | ✓ | Lockable fuel drain compartment | ✓ | |
| 850 mm (33") triple grouser track shoes | | ✓ | Service platform with anti-skid plate and recessed bolts | ✓ | |
| BOOM, STICKS AND LINKAGES | | | RH handrail and hand hold (ISO 2867:2011 compliant) | ✓ | |
| 6.5 m (21'4") Reach boom | ✓ | | Signaling/warning horn | ✓ | |
| 2.8 m (9'2") stick | | ✓ | Ground-level secondary engine shutoff switch | ✓ | |
| 3.2 m (10'6") stick | | ✓ | Boom lowering check valve | ✓ | |
| Bucket linkage, DB family with lifting eye | | ✓ | Stick lowering check valve | ✓ | |
| ELECTRICAL SYSTEM | | | Rear and right-hand-sideview cameras | ✓ | |
| Maintenance-free 1,000 CCA batteries (×2) | ✓ | | Falling object guard system | | ✓ |
| Centralized electrical disconnect switch | ✓ | | | | |
| LED chassis light, LH and RH boom lights, cab lights | ✓ | | | | |

336 GC Attachments

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

| | | |
|---|---|--|
| <p>CAB</p> <ul style="list-style-type: none"> • Radial lower wiper • Polycarbonate roof hatch • LH/RH electrical pedal for tool control • Retractable, 76 mm (3 in) wide seat belt | <p>SAFETY AND SECURITY</p> <ul style="list-style-type: none"> • Bluetooth receiver kit • Bluetooth key fob | <p>GUARDS</p> <ul style="list-style-type: none"> • Standard swivel guard • Side rubber bumper • Falling object guard system • Mesh guard full front • Mesh guard lower half front • Full protecting vandalism guard |
|---|---|--|

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2019 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ2241-02 (12-2019)
Replaces AEXQ2241-01
Build Number: 07B
(Aus-NZ)

