# Cat® G3512H/G3516H/G3520H

# **50Hz High-Efficiency Generator Sets**






Image shown may not reflect actual configuration

# **Energy Systems for Combined Heat** & Power (CHP) Applications

With power output from 1500 to 2500 ekW and top tier electrical efficiency, these innovative gas generator sets are setting new industry standards.

### **Features**

- The H Series Cat® gas generator sets deliver world-class efficiency for CHP applications.
- The lowest total life cycle cost in their power class
- · Ideally suited to the electricity balancing market
- Various options for the highest overall levels of efficiency
- Individually adapted to your specific requirements

## **Equipment**

#### **Basic Installed Equipment**

- · High power density and efficiency engine
- EMCP 4.3 generator set control, protection, and monitoring
- · SR5 high efficiency design generator

## **Power Overview**

|  | G3512H      | G3516H       | G3520H       |
|--|-------------|--------------|--------------|
| Generator set power rating – ekW (kVA)                   | 1500 (1875) | 2000 (2500)  | 2500 (3125)  |
| Fuel consumption – 100% load –<br>Btu/ekW-hr (MJ/ekW-hr) | 7683 (8.10) | 7630 (8.05)  | 7582 (8.00)  |
| Genset efficiency – %                                    | 44.9        | 45.3         | 45.3         |
| Thermal efficiency – %                                   | 42.1        | 41.3         | 41.0         |
| Voltage – V  | 400-415     | 400 - 11,000 | 400 - 11,000 |


## **Technical Data Overview**

|                                     | G3512H      | G3516H    | G3520H      |
|-------------------------------------|-------------|-----------|-------------|
| Speed – rpm                         | 1500        | 1500      | 1500        |
| Arrangement and number of cylinders | V12         | V16       | V20         |
| Bore/stroke – mm (in)               | 170/215     | 170/215   | 170/215     |
| Displacement – L (in³)              | 58.5 (3570) | 78 (4675) | 97.5 (5956) |

LEHE1262-01 Page 1 of 2



# **Dimensions and Weight**

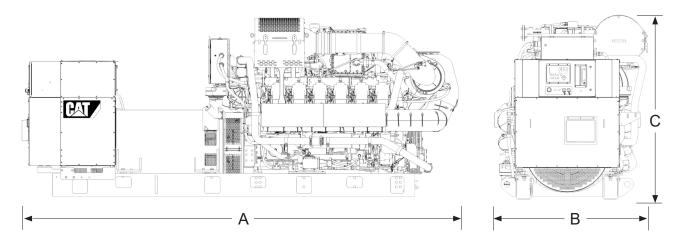

|                      | G3512H         | G3516H          | G3520H          |
|----------------------|----------------|-----------------|-----------------|
| (A) Length – mm (in) | 5657 (223)     | 5979 (235)      | 6411 (252)      |
| (B) Width – mm (in)  | 1920 (76)      | 1921 (76)       | 2218 (87)       |
| (C) Height – mm (in) | 2308 (91)      | 2307 (91)       | 2413 (95)       |
| Dry Weight – kg (lb) | 14100 (31,085) | 16 397 (36,156) | 22 300 (49,163) |

http://www.cat.com/powergeneration ©2018 Caterpillar

All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication.