



Cat[®] 740 GC

ARTICULATED TRUCK

FEATURES:

- **World Class Cab** – Designed from extensive worldwide operator interviews, surveys and forums, the new cab offers 20 percent more interior space and a quieter cab at 72 dB(A) (a reduction of 7 dB(A) against previous models).
- **Engine** – Cat C15 ACERT™ engine meets U.S. EPA Tier 4 Final/ EU Stage IV, or emits equivalent to Tier 2 or Tier 3.
- **Transmission** – CX38B High Density Power Shift (HDPS) Transmission featuring Advanced Productivity Electronic Control Strategy (APECS). Nine forward/two reverse gears incorporate many new features including reduced weight and improved performance, while maintaining durability.
- **Combined Hoist/Transmission Level** – The new innovative and unique operator control incorporates park brake activation and release, also introduces Assisted Hoist Control with both fully automatic and manual modes. Up to 50 percent less operator actions required.
- **Automatic Climate Control System** – Create a more comfortable operator space with finer control over in-cab temperature.
- **Automatic Retarder Control (ARC)** – When engaged, control of the retarder is managed entirely by the machine. No operator input is required.
- **Seat Belt Indicator** – Audible and visible alert if operator seat belt is not worn.
- **Operator Presence Switch** – Machine will not engage gear without operator being seated.
- **Emergency Brake Switch** – Brings the machine to a safe stop in the unlikely event of both main and secondary brake circuits failing.
- **Economy Mode** – Provides an average 5 percent reduction on fuel consumption.
- **Cat Detect With Stability Assist** – Audible and visual alert to operator if the tractor and/or trailer unit is approaching a pre-set angle during operation.
- **Terrain Based Throttle Control** – Smoothens throttle input over rough terrain to improve ride quality.
- **Advanced Automatic Traction Control** – Proactively applies differential lock to prevent wheel spin.
- **Directional Shift Protection** – Protects the power train when quickly changing gear from Reverse to Forward or Forward to Reverse.
- **Durable Flexi Fender** – Prevents permanent damage and reduces repair costs.
- **Touchscreen Information Display** – Monitor and configure machine options and view feed from rear view camera.
- **Machine Wake Up** – Initiates machine systems at ground level or when cab door is opened.
- **Low Profile Exhaust Stack** – Reduces overall height and eliminates the need to remove the exhaust stack for transport.
- **Improved Door** – Increased visibility with more glass surface area and 36 percent lighter to ease opening and closing.
- **Integrated Payload Lights (when CPM option is fitted)** – Wide angle beam lights on all cab roof corners provide clear visibility to loading tool operator and site controllers.
- **Cab Mounted Mirrors** – Excellent visibility, reduced vibration and easily folded.
- **Front Visibility Mirror** – Gives clear view immediately in front of the machine.
- **Redesigned Cab Structure** – Increases glass area improving rear quarter visibility when reversing.
- **Sliding Windows (left and right)** – Improved ventilation and communication.
- **Large Storage Areas** – Side storage box can be cooled or heated by Heating Ventilation Air Conditioning. Twin cup holders, hard hat hook and smaller storage pockets are all included.

740 GC Articulated Truck

Specifications

Engine

Engine Model	C15 ACERT	
Gross Power – SAE J1995	337 kW	452 hp
Net Power – SAE J1349	329 kW	441 hp
Net Power – ISO 14396	333 kW	447 hp
Bore	137 mm	5.4 in
Stroke	171.5 mm	6.75 in
Displacement	15.2 L	926 in ³
No Engine De-rating Required Below	3050 m	10,000 ft
Peak Engine Torque Gross (SAE J1995)	2618 N·m	1,931 lb-ft
Peak Engine Torque Net (ISO 14396)	2558 N·m	1,887 lb-ft
Peak Engine Torque Speed	1,200 rpm	

Body Capacities

Rated Payload	36.3 tonnes	40 tons
Heaped SAE 2:1	22.7 m ³	29.7 yd ³
Struck	17 m ³	22.7 yd ³

Transmission

Forward 1	6.4 km/h	4 mph
Forward 2	8.5 km/h	5.3 mph
Forward 3	11.8 km/h	7.3 mph
Forward 4	14.8 km/h	9.2 mph
Forward 5	19.7 km/h	12.2 mph
Forward 6	24 km/h	14.9 mph
Forward 7	33.1 km/h	20.6 mph
Forward 8	39.8 km/h	24.7 mph
Forward 9	57.5 km/h	35.7 mph
Reverse 1	6.8 km/h	4.2 mph
Reverse 2	15.4 km/h	9.6 mph

Sound Levels

Interior Cab	72 dB(A)
--------------	----------


Operating Weights

Front Axle – Empty	19 321 kg	42,596 lb
Center Axle – Empty	6639 kg	14,636 lb
Rear Axle – Empty	6416 kg	14,145 lb
Total – Empty	32 376 kg	71,377 lb
Front Axle – Rated Load	3233 kg	7,128 lb
Center Axle – Rated Load	16 534 kg	36,451 lb
Rear Axle – Rated Load	16 534 kg	36,451 lb
Total – Rated Load	36 300 kg	80,028 lb
Front Axle – Loaded	22 554 kg	49,723 lb
Center Axle – Loaded	23 173 kg	51,088 lb
Rear Axle – Loaded	22 949 kg	50,594 lb
Total – Loaded	68 676 kg	151,405 lb

Fill Capacities

Fuel Tank	550 L	145.3 gal
Cooling System	90 L	23.7 gal
Brake Cooling Tank	67 L	17.7 gal
Steering/Hoist Hydraulic System	140 L	36.9 gal
Engine Crankcase	52 L	13.7 gal
Transmission/Output Transfer Gear	75 L	19.8 gal
Final Drives (each)	5 L	1.3 gal
Axles (each)	60 L	15.8 gal

740 GC Articulated Truck

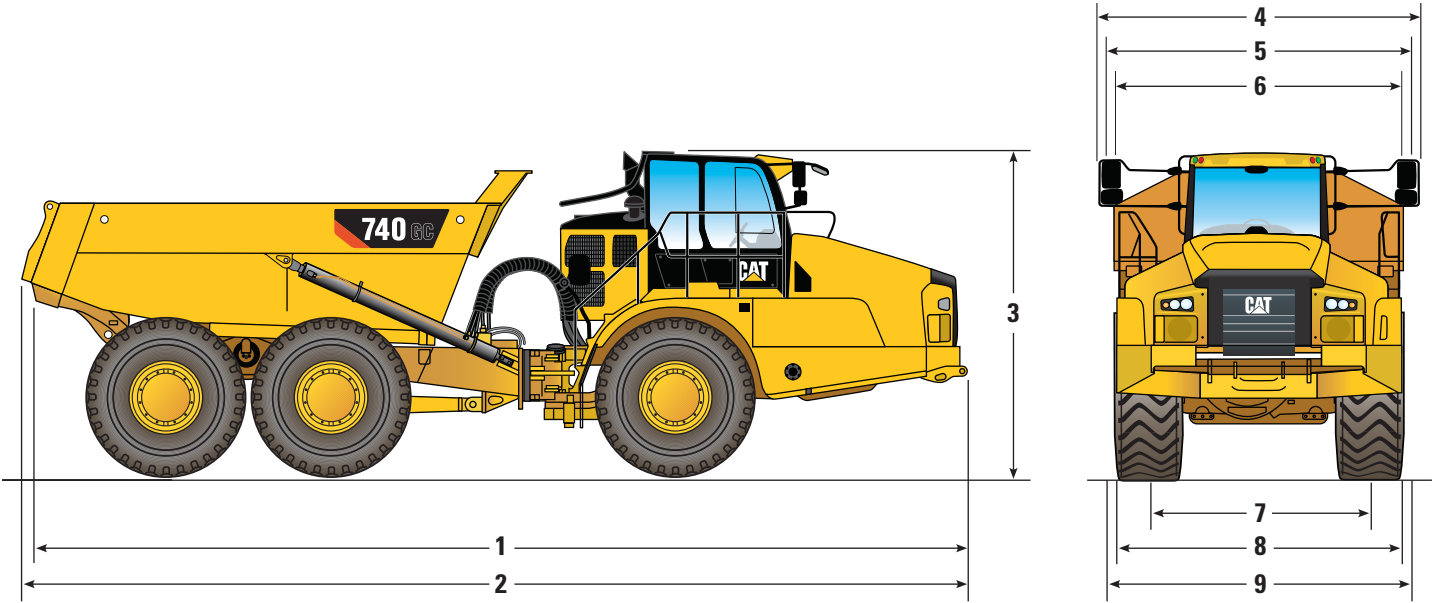

Dimensions

(All dimensions are approximate.)

1	11 052 mm	36 ft 4 in	6**	3422 mm	11 ft 3 in
2*	11 173 mm	36 ft 8 in	7***	2687 mm	8 ft 10 in
3	3757 mm	12 ft 3 in	8****	3370 mm	11 ft 0 in
4	3801 mm	12 ft 5 in	9*****	3500 mm	11 ft 5 in
5*	3641 mm	11 ft 11 in			

- *With tailgate
- **Body width
- ***Track width
- ****Over fenders
- *****Max laden over tire bulge

740 GC Articulated Truck

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2018 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ8119 (07-2018)
(Russia)

