



# Cat<sup>®</sup> Skeleton Buckets

SKID STEER LOADERS  
COMPACT TRACK LOADERS

Cat<sup>®</sup> Skeleton Buckets are versatile buckets used in a variety of applications including agriculture, general construction, demolition, landscaping and scrap handling segments. The skeleton bucket is an ideal attachment for a range of tasks from screening solid materials to reclaiming rock and landscaping materials buried by sediment. Skeleton buckets come in two styles: rod tine style and plate tine style and are for use on skid steer loaders and compact track loaders.

## Features:

### Rod tine style

- Rod tines are 32 mm (1.25 in) in diameter with 16 mm (0.63 in) thick tine points improving breakout force by initially separating rock from soil more efficiently than a cutting edge.

### Plate tine style

- Plate tines are 10 mm (0.4 in) in thickness with fishhook tine points for better soil penetration to remove roots and reclaim construction material left on the jobsite.

### Wide tine spacing

- Wide tine spacing allows for quicker screening and greater material separation.

### Rock dam

- Rock dam improves material retention, reduces spillage and increases productivity.

### Greater visibility

- Greater visibility for the operator is achieved with the open back bucket design.

### Welded gussets

- Welded gussets between tines prevents yielding corner of bucket.

### Serrated Step

- Serrated step ensures operator stability for ingress and egress from cab.

## Compatibility

Model	Machines
<b>2016 mm (79 in)</b>	216B3, 226B3, 226D3, 232D3, 236D3, 239D3, 242D3, 246D3, 249D3, 257D3, 259D3, 262D3, 272D3, 272D3 XE, 279D3, 289D3, 299D3, 299D3 XE
<b>2206 mm (87 in)</b>	216B3, 226B3, 226D3, 232D3, 236D3, 239D3, 242D3, 246D3, 249D3, 257D3, 259D3, 262D3, 272D3, 272D3 XE, 279D3, 289D3, 299D3, 299D3 XE
<b>2397 mm (94 in)</b>	216B3, 226B3, 226D3, 232D3, 236D3, 239D3, 242D3, 246D3, 249D3, 257D3, 259D3, 262D3, 272D3, 272D3 XE, 279D3, 289D3, 299D3, 299D3 XE
<b>1849 mm (73 in)</b>	216B3, 226B3, 226D3, 232D3, 236D3, 239D3, 242D3, 246D3, 249D3, 257D3, 259D3, 262D3, 272D3, 272D3 XE, 279D3, 289D3, 299D3, 299D3 XE
<b>2017 mm (80 in)</b>	216B3, 226B3, 226D3, 232D3, 236D3, 239D3, 242D3, 246D3, 249D3, 257D3, 259D3, 262D3, 272D3, 272D3 XE, 279D3, 289D3, 299D3, 299D3 XE
<b>2182 mm (86 in)</b>	216B3, 226B3, 226D3, 232D3, 236D3, 239D3, 242D3, 246D3, 249D3, 257D3, 259D3, 262D3, 272D3, 272D3 XE, 279D3, 289D3, 299D3, 299D3 XE
<b>2349 mm (93 in)</b>	216B3, 226B3, 226D3, 232D3, 236D3, 239D3, 242D3, 246D3, 249D3, 257D3, 259D3, 262D3, 272D3, 272D3 XE, 279D3, 289D3, 299D3, 299D3 XE


Current production machines listed. Machine model availability and attachment vary by region. Contact your local Cat dealer for exact compatibility and availability.



# Cat® Skeleton Buckets


## Specifications

### Rod Tine Style Bucket

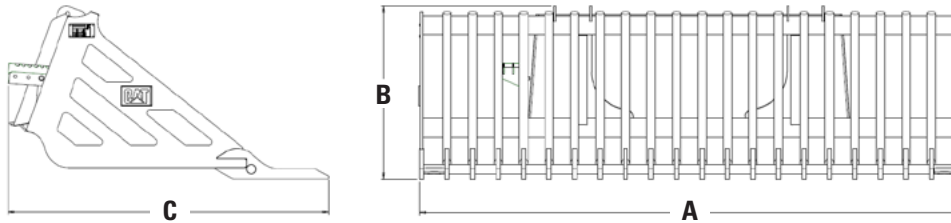

			2016 mm (79 in)		2206 mm (87 in)		2397 mm (94 in)	
<b>A</b> Width	mm (in)		2016	(79.4)	2206	(86.9)	2397	(94.4)
<b>B</b> Height	mm (in)		644	(25.4)	644	(25.4)	644	(25.4)
<b>C</b> Length	mm (in)		1199	(47.2)	1199	(47.2)	1199	(47.2)
Weight	kg (lb)		336	(741)	363	(800)	390	(860)
Sidewall Thickness	mm (in)		10	(0.4)	10	(0.4)	10	(0.4)
Tine Spacing	mm (in)		64	(2.5)	64	(2.5)	64	(2.5)
Tine Thickness	mm (in)		32	(1.3)	32	(1.3)	32	(1.3)
Number of tines			20		22		24	
Bucket Style			Rod		Rod		Rod	

### Plate Tine Style Bucket

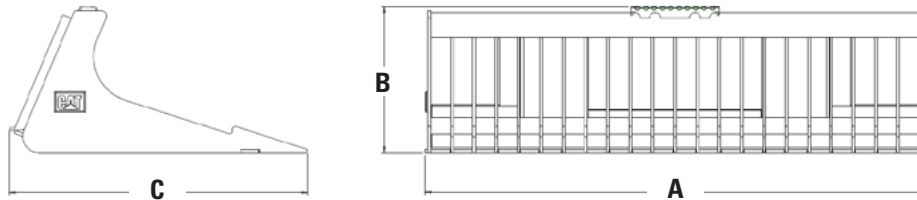

			1849 mm (73 in)		2017 mm (80 in)		2182 mm (86 in)		2349 mm (93 in)	
<b>A</b> Width	mm (in)		1849	(72.8)	2017	(79.4)	2182	(85.9)	2349	(92.5)
<b>B</b> Height	mm (in)		544	(21.4)	544	(21.4)	544	(21.4)	544	(21.4)
<b>C</b> Length	mm (in)		1115	(43.9)	1115	(43.9)	1115	(43.9)	1115	(43.9)
Weight	kg (lb)		317	(699)	342	(754)	365	(805)	382	(842)
Sidewall Thickness	mm (in)		12	(0.5)	12	(0.5)	12	(0.5)	12	(0.5)
Tine Spacing	mm (in)		73	(2.9)	73	(2.9)	73	(2.9)	73	(2.9)
Tine Thickness	mm (in)		10	(0.4)	10	(0.4)	10	(0.4)	10	(0.4)
Number of tines			21		25		27		29	
Bucket Style			Plate		Plate		Plate		Plate	

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

AEHQ8151-01 (05-2020)  
Replaces AEXQ8151

© 2020 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

VisionLink is a trademark of Trimble Navigation Limited, registered in the United States and in other countries.

