



320 GC

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	2
Sound Performance	2
Operating Weight and Ground Pressure	3
Major Component Weights	3
Dimensions	4
Working Ranges	5
Bucket Specifications and Compatibility	6
Attachments Offering Guide:	
China	7
Hong Kong, Taiwan	7
Standard and Optional Equipment	8
Dealer Installed Kit and Attachments	10

320 GC Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C4.4	
Net Power (ISO 9249)	107 kW	143 hp
Engine Power (ISO 14396)	108 kW	145 hp
Bore	105 mm	4 in
Stroke	127 mm	5 in
Displacement	4.4 L	269 in ³

- The 320 GC meets China Nonroad Stage III emission standards.
- Recommended for use up to 4500 m (14,764 ft) altitude with engine power derate above 3000 m (9,842.5 ft).
- Net power is tested per ISO 9249. Standards in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Rated speed at 2,000 rpm.

Swing Mechanism

Swing Speed	11.3 rpm	
Maximum Swing Torque	74.4 kN·m	54,900 lbf-ft

Weights

Operating Weight	19 800 kg	43,700 lb
------------------	-----------	-----------

- Reach boom, R2.9 (9'6") stick, GD 1.0 m³ (1.31 yd³) bucket and 600 mm (24") triple grouser shoes, 3.7 mt (8,200 lb) counterweight.

Track

Standard Track Shoes Width	600 mm	24 in
Number of Shoes (each side)	45	
Number of Track Rollers (each side)	7	
Number of Carrier Rollers (each side)	2	

Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	206 kN	46,311 lbf

Hydraulic System

Main System – Maximum Flow – Implement	429 L/min (215 × 2 pumps)	113 gal/min (57 × 2 pumps)
Maximum Pressure – Equipment	35 000 kPa	5,075 psi
Maximum Pressure – Travel	34 300 kPa	4,974 psi
Maximum Pressure – Swing	25 000 kPa	3,625 psi
Boom Cylinder – Bore	120 mm	5 in
Boom Cylinder – Stroke	1260 mm	50 in
Stick Cylinder – Bore	135 mm	5 in
Stick Cylinder – Stroke	1504 mm	59 in
Bucket Cylinder – Bore	115 mm	5 in
Bucket Cylinder – Stroke	1104 mm	43 in

Service Refill Capacities

Fuel Tank Capacity	345 L	86.6 gal
Cooling System	25 L	6.6 gal
Engine Oil	15 L	4.0 gal
Swing Drive (each)	12 L	3.2 gal
Final Drive (each)	4 L	1.1 gal
Hydraulic System (including tank)	234 L	61.8 gal
Hydraulic Tank	115 L	30.4 gal

Standards

Brakes	ISO 10265: 2008
Cab/ROPS	ISO 12117-2: 2008
FOGS (optional)	ISO 10262-2: 1998

Sound Performance

ISO 6395:2008 (external)	99 dB(A)
ISO 6396:2008 (inside cab)	70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

320 GC Hydraulic Excavator Specifications

Operating Weight and Ground Pressure

	600 mm (24") Triple Grouser Shoes			
	Weight		Ground Pressure	
3.7 mt (8,200 lb) Counterweight Base Machine				
Reach Boom + R2.9 (9'6") Stick + 1.0 m ³ (1.31 yd ³) GD Bucket	19 800 kg	43,700 lb	45.6 kPa	6.6 psi

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.


Major Component Weights

	kg	lb
Base Machine (with 3.7 mt [8,200 lb] counterweight, standard swing frame, standard base frame with standard track rollers and standard carrier rollers for standard undercarriage, without boom cylinders – does not include 90% fuel and 75 kg [165 lb] operator)	13 200	29,100
Track Shoes:		
600 mm (24") Width, 8.5 mm (0.33") Thick Triple Grouser Track Shoes for Standard Undercarriage	2580	5,700
Two Boom Cylinders	340	750
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	310	680
Counterweight:		
3.7 mt Counterweight	3700	8,200
Swing Frame:		
Standard Swing Frame	1880	4,150
Undercarriage:		
Standard Base Frame with Standard Track Rollers and Standard Carrier Rollers for Standard Undercarriage	4030	8,900
Booms (including lines, pins, stick cylinder):		
Reach Boom (5.7 m/18'8")	1690	3,700
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick (R2.9B1/9'6")	980	2,200
Buckets (without linkage):		
1.0 m ³ (1.31 yd ³) GD	730	1,600

320 GC Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

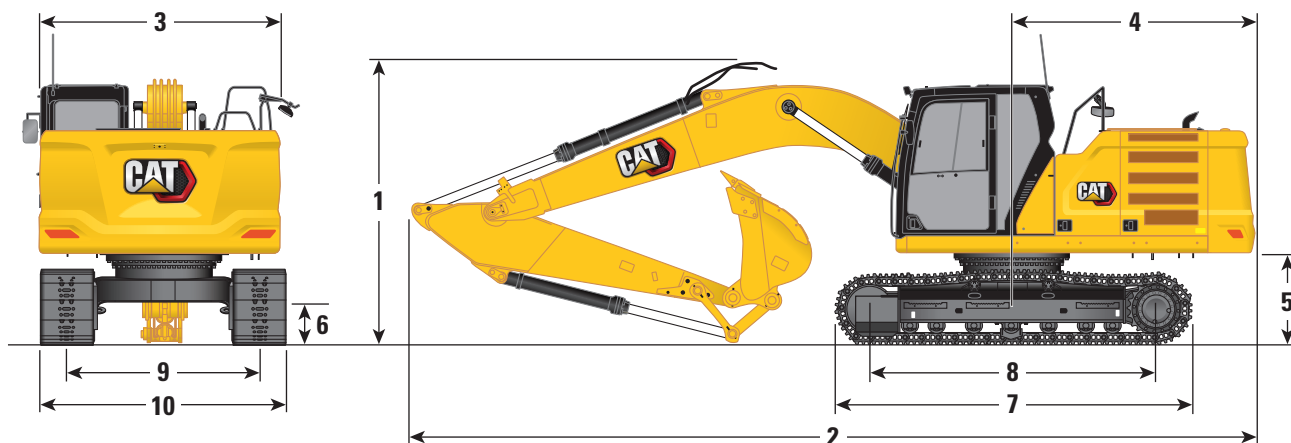

Boom Option

Reach Boom
5.7 m (18'8")

Stick Option

Reach Stick
R2.9B1 (9'6")

1 Machine Height:

Top of Cab Height	2960 mm	9'9"
Top of FOGS Height	3100 mm	10'2"
Handrails Height	2950 mm	9'8"
With Boom/Stick/Bucket Installed	3160 mm	10'4"
With Boom/Stick Installed	2910 mm	9'7"
With Boom Installed	2480 mm	8'2"

2 Machine Length:

With Boom/Stick/Bucket Installed	9530 mm	31'3"
With Boom/Stick Installed	9500 mm	31'2"
With Boom Installed	8450 mm	27'9"

3 Upperframe Width without Walkways

2780 mm 9'1"

4 Tail Swing Radius

2830 mm 9'3"

5 Counterweight Clearance

1050 mm 3'5"

6 Ground Clearance

470 mm 1'7"

7 Track Length

4070 mm 13'4"

8 Length to Center of Rollers

3270 mm 10'9"

9 Track Gauge

2200 mm 7'3"

10 Undercarriage Width:

600 mm (24") Shoes	2800 mm	9'2"
--------------------	---------	------

Bucket Type

GD

Bucket Capacity

1.0 m³ 1.31 yd³


Bucket Tip Radius

1580 mm 5'2"

320 GC Hydraulic Excavator Specifications

Working Ranges

All dimensions are approximate and may vary depending on bucket selection.

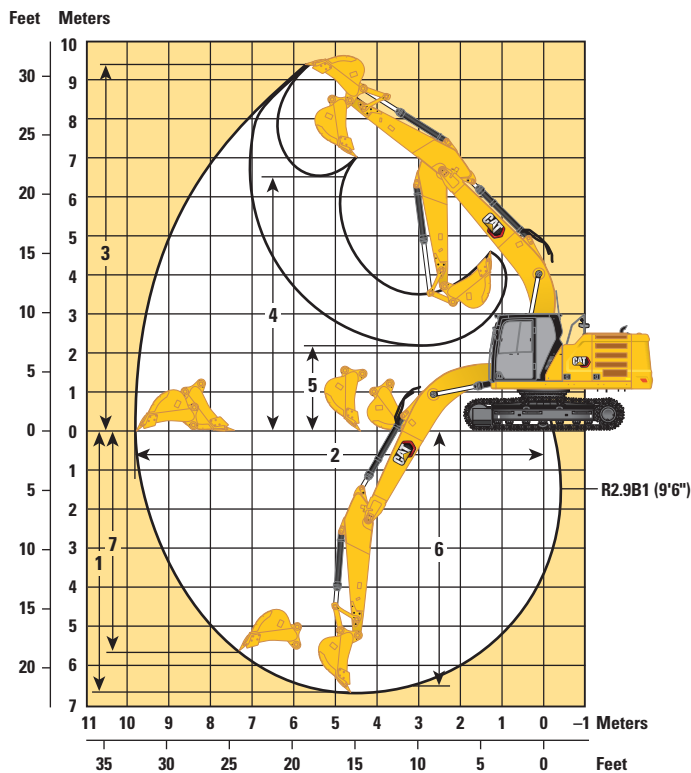

Boom Option

Reach Boom
5.7 m (18'8")

Stick Option

Reach Stick
R2.9B1 (9'6")

1 Maximum Digging Depth	6710 mm	22'0"
2 Maximum Reach at Ground Line	9850 mm	32'4"
3 Maximum Cutting Height	9450 mm	31'0"
4 Maximum Loading Height	6500 mm	21'4"
5 Minimum Loading Height	2180 mm	7'2"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	6540 mm	21'5"
7 Maximum Vertical Wall Digging Depth	6010 mm	19'8"
Bucket Digging Force (ISO)	129 kN	29,007 lbf
Stick Digging Force (ISO)	99 kN	22,301 lbf
Bucket Type	GD	
Bucket Capacity	1.0 m ³	1.31 yd ³
Bucket Tip Radius	1560 mm	5'1"

320 GC Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill	3.7 mt (8,200 lb) Counterweight
		mm	in	m ³	yd ³	kg	lb		%
Pin-On (No Quick Coupler)									
Utility Duty	B	1150	46	0.90	1.18	725	1,599	100	⊙
	B	1250	50	1.00	1.31	758	1,672	100	⊖
General Duty Excavation	B	1150	46	0.90	1.18	758	1,671	100	⊙
	B	1250	50	1.00	1.31	792	1,747	100	⊖
	B	1400	56	1.14	1.49	858	1,891	100	X
Heavy Duty	B	1050	43	1.00	1.31	884	1,948	100	⊖
	B	1200	49	1.19	1.56	955	2,105	100	○
	B	1350	54	1.38	1.81	1018	2,244	100	X
Severe Duty	B	1100	43	1.00	1.31	965	2,128	90	⊖
	B	1250	49	1.19	1.56	1063	2,343	90	○
General Duty	312	900	36	0.53	0.69	403	888	100	
Ditch Cleaning	312	1200	48	0.57	0.74	386	851	100	
Maximum load with pin-on (payload + bucket)								kg	2425
								lb	5,346
	Linkage	Width		Capacity		Weight		Fill	3.7 mt (8,200 lb) Counterweight
		mm	in	m ³	yd ³	kg	lb		%
With Cat Pin Grabber Coupler									
Utility Duty	B	1150	46	0.90	1.18	725	1,599	100	○
	B	1250	50	1.00	1.31	758	1,672	100	○
General Duty Excavation	B	1150	46	0.90	1.18	758	1,671	100	○
	B	1250	50	1.00	1.31	792	1,747	100	○
	B	1400	56	1.14	1.49	858	1,891	100	◇
Heavy Duty	B	1050	43	1.00	1.31	884	1,948	100	◇
	B	1200	49	1.19	1.56	955	2,105	100	◇
	B	1350	54	1.38	1.81	1018	2,244	100	X
Severe Duty	B	1100	43	1.00	1.31	965	2,128	90	○
	B	1250	49	1.19	1.56	1063	2,343	90	◇
Maximum load with coupler (payload + bucket)								kg	2006
								lb	4,423

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

320 GC Hydraulic Excavator Specifications

Attachments Offering Guide – China

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match
 * Working range front only
 † Allowed usage on machine less than 50%
 No Match

PIN-ON ATTACHMENTS

Counterweight		3.7 mt (8,200 lb)
Boom Type		Reach
Stick Length		2.92 m (9'7")
Hydraulic Hammers	H115 S	✓
	H120 GC	✓
	H120 GC Side Mount	✓
	H120 S	✓
	H130 GC	
	H130 S	✓†
Compactors (Vibratory Plate)	CVP110	✓

CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		3.7 mt (8,200 lb)
Boom Type		Reach
Stick Length		2.92 m (9'7")
Hydraulic Hammers	H115 S	✓
	H120 GC	✓†*
	H120 GC Side Mount	✓†
	H120 S	✓†
	H130 S	✓†*
Compactors (Vibratory Plate)	CVP110	✓

Attachments Offering Guide – Hong Kong, Taiwan

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match
 * Working range front only
 † Allowed usage on machine less than 50%
 No Match

PIN-ON ATTACHMENTS

Counterweight		3.7 mt (8,200 lb)
Boom Type		Reach
Stick Length		2.92 m (9'7")
Hydraulic Hammers	H120 GC	✓
	H120 GC S	✓
	H130 GC	
	H130 GC S	

320 GC Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
CAB			ENGINE		
ROPS, standard sound suppression	✓		Two selectable power modes	✓	
High-resolution 203 mm (8") LCD touchscreen monitor	✓		Automatic engine speed control	✓	
Auto bi-level air conditioner	✓		Auto engine idle shutdown	✓	
Jog dial and shortcut keys for monitor control	✓		Work up to 3000 m (9,842.5 ft) above sea level without engine power de-rating	✓	
Keyless push-to-start engine control	✓		52° C (125° F) high-ambient cooling capacity	✓	
Height-adjustable console, three steps with tool	✓		Cold starting capability for -32° C (-25° F)	✓	
Fixed left-side console	✓		Double element air filter with integrated pre-cleaner	✓	
Mechanically adjustable seat suspension	✓		Electric fuel priming pump	✓	
51 mm (2") orange seat belt	✓		Electric cooling fans with auto-reverse function	✓	
Bluetooth® integrated radio (no USB, aux port or microphone)	✓		Biodiesel capability up to B20	✓	
12V DC outlets	✓		HYDRAULIC SYSTEM		
Document storage	✓		Boom and stick regeneration circuits	✓	
Cup and bottle holders	✓		Electronic main control valve	✓	
Openable two-piece front window	✓		Auto warm up	✓	
Upper radial wiper with washer	✓		Auto two-speed travel	✓	
Openable steel hatch	✓		Boom and stick drift reduction valve	✓	
LED dome light	✓		Element type main hydraulic filter	✓	
Roller front sunscreen	✓		Three button joysticks	✓	
Roller rear sunscreen		✓	Slider joysticks		✓*
Rear window emergency exit	✓		Tandem type electronic main pump	✓	
Washable floor mat	✓		Hammer return filter circuit		✓*
Beacon ready	✓		Tool Control (two pump, one/two way high-pressure flow)		✓*
			Basic Tool Control (one pump, one way high-pressure flow)		✓
			Quick coupler circuit for Cat Pin Grabber		✓*
			Operating pattern film (four way)	✓*	

*Hong Kong and Taiwan only

(continued on next page)

320 GC Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
UNDERCARRIAGE AND STRUCTURES			CAT TECHNOLOGY		
600 mm (24") triple grouser track shoes	✓		Cat Product Link™	✓	
Tie-down points on base frame	✓		Auto hammer stop	✓	
Bottom guards	✓		SERVICE AND MAINTENANCE		
Travel motor guards	✓		S·O·S SM sampling ports	✓	
Grease lubricated track links	✓		Grouped location for engine oil and fuel filters	✓	
Center track guiding guards	✓		Ground-level second dipstick for engine oil	✓	
3.7 mt (8,200 lb) counterweight	✓		Side entry to service platform	✓	
BOOM, STICKS AND LINKAGES			SAFETY AND SECURITY		
5.7 m (18'8") Reach boom	✓		Rearview camera and side RH mirror	✓	
2.9 m (9'6") Reach stick	✓		Right-hand-sideview camera		✓
Bucket linkage, B1-family with or without lifting eye	✓		Neutral lever (lock out) for all controls	✓	
ELECTRICAL SYSTEM			Anti-skid plate and countersunk bolts on service platform	✓	
1,000 CCA maintenance-free batteries (×2)	✓		Ground-level accessible secondary engine shutoff switch in cab	✓	
Centralized electrical disconnect switch	✓		RH handrail and handhold (ISO 2867:2011 compliant)	✓	
Programmable time-delay LED working lights	✓		Travel alarm	✓*	
LED chassis light and LH boom light	✓				
RH boom light, cab lights		✓			

*Hong Kong and Taiwan only

320 GC Attachments

Dealer Installed Kit and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- RH electrical pedal (Hong Kong, Taiwan)
- Polycarbonate roof hatch

SAFETY AND SECURITY

- Bluetooth receiver kit (Hong Kong, Taiwan)

SERVICE AND MAINTENANCE

- Grease gun holder

GUARDS

- FOGS (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Full protecting vandalism guard
- Swivel guard

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2020 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ2198-05 (08-2020)
Replaces AEXQ2198-04
Build Number: 07D
(China/Hong Kong/Taiwan)

