



# Cat<sup>®</sup> 289D3

## COMPACT TRACK LOADER

### FEATURES:

The Cat<sup>®</sup> 289D3 Compact Track Loader, with its vertical lift design, delivers extended reach and lift height for quick and easy truck loading. Its standard, suspended undercarriage system provides superior traction, flotation, stability and speed to work in a wide range of applications and underfoot conditions. The 289D3 features the following:

- **Industry leading sealed and pressurized cab option** provides a cleaner and quieter operating environment with excellent work tool visibility.
- **Available high-back, heated, air ride seat with seat mounted adjustable joystick controls** makes the D3 Series the industry leader in operator comfort.
- **High performance power train** provides maximum performance and production capability through the Electronic Torque Management system, standard two speed travel and an industry exclusive electronic hand/foot throttle with decel pedal capability.
- **High Flow XPS hydraulic system** is available for applications that demand maximum hydraulic work tool performance.
- **Electronically controlled Cat C3.3B engine** provides high horsepower and torque while meeting U.S. EPA Tier 4 Final and EU Stage V emission standards.
- **Cat "Intelligent Leveling" system** provides industry leading technology, integration, and available features such as dual direction self level, work tool return to dig, and work tool positioner.
- **Standard fully independent torsion axle suspension** combined with the optional Speed Sensitive Ride Control system improves operation on rough terrain, enabling better load retention, increased productivity and greater operator comfort.
- **Maximize machine capability and control** with optional Advanced Display providing on-screen adjustments for implement response, hystat response and creep control. Also features multi-language functionality with customizable layouts, security system and rearview camera.
- **Ground level access** to all daily service and routine maintenance points helps reduce machine downtime for greater productivity.
- **Broad range of performance matched Cat Work Tools** make the Cat Compact Track Loader the most versatile machine on the job site.

## Specifications

### Engine\*

|                                    |                       |                     |
|------------------------------------|-----------------------|---------------------|
| Engine Model                       | Cat C3.3B DIT (turbo) |                     |
| Gross Power SAE J1995              | 55.4 kW               | 74.3 hp             |
| Net Power SAE 1349                 | 54.4 kW               | 72.9 hp             |
| Net Power ISO 9249                 | 54.9 kW               | 73.7 hp             |
| Peak Torque at 1,500 rpm SAE J1995 | 265 N-m               | 195 lbf-ft          |
| Displacement                       | 3.3 L                 | 203 in <sup>3</sup> |
| Stroke                             | 120 mm                | 4.7 in              |
| Bore                               | 94 mm                 | 3.7 in              |

\*Net power advertised is the power available at the flywheel when the engine is equipped with alternator, air cleaner, muffler/aftertreatment and cooling fan.

### Weights\*

|                  |         |           |
|------------------|---------|-----------|
| Operating Weight | 4848 kg | 10,688 lb |
|------------------|---------|-----------|

\*Operating Weight, Operating Specifications and Dimensions all based on 75 kg (165 lb) operator, all fluids, two speed, OROPS, 2036 mm (80 in) low profile bucket, 450 mm (17.7 in) tracks, dual flange front idler/single flange rear idler, standard flow hydraulics, mechanical suspension seat, no optional counterweights and manual quick coupler (unless otherwise noted).

### Power Train


|                                    |           |         |  |
|------------------------------------|-----------|---------|--|
| Travel Speed (Forward or Reverse): |           |         |  |
| One Speed                          | 7.2 km/h  | 4.5 mph |  |
| Two Speed                          | 13.3 km/h | 8.3 mph |  |

### Hydraulic System

|                                   |            |            |  |
|-----------------------------------|------------|------------|--|
| Hydraulic Flow – Standard:        |            |            |  |
| Loader Hydraulic Pressure         | 23 000 kPa | 3,335 psi  |  |
| Loader Hydraulic Flow             | 86 L/min   | 23 gal/min |  |
| Hydraulic Power (calculated)      | 33 kW      | 44 hp      |  |
| Hydraulic Flow – High Flow XPS:   |            |            |  |
| Maximum Loader Hydraulic Pressure | 28 000 kPa | 4,061 psi  |  |
| Maximum Loader Hydraulic Flow     | 121 L/min  | 32 gal/min |  |
| Hydraulic Power (calculated)      | 57 kW      | 76 hp      |  |



# 289D3 Compact Track Loader

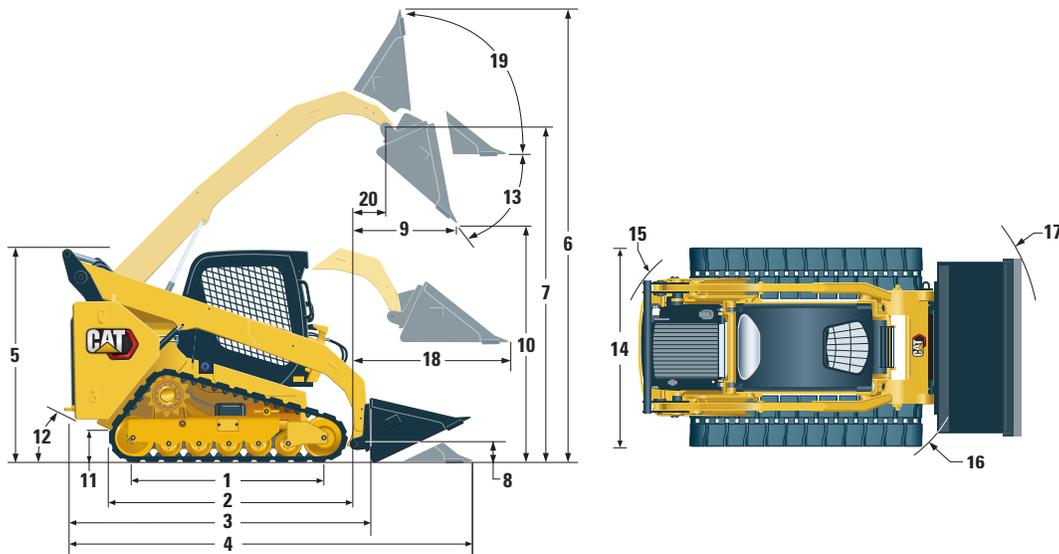

## Dimensions\*

|                                       |         |          |   |         |         |
|---------------------------------------|---------|----------|---|---------|---------|
| 1 Length of Track on Ground           | 1630 mm | 64.2 in  | 11 Ground Clearance                           | 226 mm  | 8.9 in  |
| 2 Overall Length of Track             | 2129 mm | 83.8 in  | 12 Departure Angle                            |         | 33°     |
| 3 Length without Bucket               | 2995 mm | 117.9 in | 13 Maximum Dump Angle                         |         | 51°     |
| 4 Length with Bucket on Ground        | 3714 mm | 146.2 in | 14 Vehicle Width (450 mm/17.7 in tracks)      | 1981 mm | 78.0 in |
| 5 Height to Top of Cab                | 2113 mm | 83.2 in  | 15 Turning Radius from Center – Machine Rear  | 1796 mm | 70.7 in |
| 6 Maximum Overall Height              | 4015 mm | 158.1 in | 16 Turning Radius from Center – Coupler       | 1410 mm | 55.5 in |
| 7 Bucket Pin Height at Maximum Lift   | 3178 mm | 125.1 in | 17 Turning Radius from Center – Bucket        | 2256 mm | 88.8 in |
| 8 Bucket Pin Height at Carry Position | 190 mm  | 7.5 in   | 18 Maximum Reach with Arms Parallel to Ground | 1270 mm | 50.0 in |
| 9 Reach at Maximum Lift and Dump      | 761 mm  | 30.0 in  | 19 Rack Back Angle at Maximum Height          |         | 84°     |
| 10 Clearance at Maximum Lift and Dump | 2387 mm | 94.0 in  | 20 Bucket Pin Reach at Maximum Lift           | 369 mm  | 14.5 in |

## Operating Specifications\*

|  |                     |                       |
|--|---------------------|-----------------------|
| Rated Operating Capacity:                            |                     |                       |
| 35% Tipping Load                                     | 1315 kg             | 2,890 lb              |
| 50% Tipping Load                                     | 1880 kg             | 4,130 lb              |
| Rated Operating Capacity with Optional Counterweight |                     |                       |
| Tipping Load   | 3750 kg             | 8,255 lb              |
| Breakout Force, Tilt Cylinder                        | 3307 kg             | 7,291 lb              |
| Ground Contact Area (450 mm/17.7 in track)           | 1.47 m <sup>2</sup> | 2,272 in <sup>2</sup> |
| Ground Pressure (450 mm/17.7 in track)               | 32.2 kPa            | 4.7 psi               |

## Cab

|      |                       |
|------|-----------------------|
| ROPS | ISO 3471:2008         |
| FOPS | ISO 3449:2005 Level I |

## Service Refill Capacities

|                  |       |          |
|------------------|-------|----------|
| Cooling System   | 14 L  | 3.7 gal  |
| Engine Crankcase | 11 L  | 3.0 gal  |
| Fuel Tank        | 105 L | 27.7 gal |
| Hydraulic System | 52 L  | 13.7 gal |
| Hydraulic Tank   | 39 L  | 10.3 gal |

## Noise Level

|                |           |
|----------------|-----------|
| Inside Cab**   | 83 dB(A)  |
| Outside Cab*** | 103 dB(A) |

- Cab and Rollover Protective Structures (ROPS) are standard in North America and Europe.

\*\*The declared dynamic operator sound pressure levels per ISO 6396:2008. The measurements were conducted with the cab doors and windows closed and at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

\*\*\*The labeled sound power level for the CE marked configurations when measured according to the test procedure and conditions specified in 2000/14/EC.

## Air Conditioning System (if equipped)

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.0 kg of refrigerant which has a CO<sub>2</sub> equivalent of 1.430 metric tonnes.

## MANDATORY EQUIPMENT

---

- Hydraulics, Standard or High Flow XPS
- Quick Coupler, Mechanical or Powered
- High Visibility Seat Belt, 50 mm (2 in) or 75 mm (3 in)
- Steel Imbed Rubber Track – 450 mm (17.7 in)
- Dual Flange Front Idler/Single Flange Rear Idler or Triple Flange Front/Rear Idlers

## PERFORMANCE PACKAGES

- Performance Package H1: *Standard Flow Hydraulics (No Self Level)*
- Performance Package H2: *Standard Flow, Dual Direction Electronic Self Level (Raise and Lower), Work Tool Return to Dig, Work Tool Positioner, and Electronic Snubbing (Raise and Lower)*
- Performance Package H3: *High Flow XPS, Dual Direction Electronic Self Level (Raise and Lower), Work Tool Return to Dig, Work Tool Positioner, and Electronic Snubbing (Raise and Lower)*

## STANDARD EQUIPMENT

---

### ELECTRICAL

- 12 volt Electrical System
- 80 ampere Alternator
- Ignition Key Start/Stop Switch
- Lights: *Gauge Backlighting, Two Rear Tail Lights, Two Rear Halogen Working Lights, Two Adjustable Front Halogen Lights, Dome Light*
- Backup Alarm
- Heavy Duty Battery, 850 CCA

### OPERATOR ENVIRONMENT

- Advanced Display with Rearview Camera: *Full Color, 127 mm (5 in) LCD screen; Advanced Multi-operator Security System; On-screen Adjustments for Implement Response, Hystat Response and Creep Control*
- Gauges: *Fuel Level, Hour Meter*
- Operator Warning System Indicators: *Air Filter Restriction, Alternator Output, Armrest Raised/Operator Out of Seat, Engine Coolant Temperature, Engine Oil Pressure, Glow Plug Activation, Hydraulic Filter Restriction, Hydraulic Oil Temperature, Park Brake Engaged, Engine Emission System*
- Adjustable Vinyl Seat
- Fold In Ergonomic Contoured Armrest
- Control Interlock System, when operator leaves seat or armrest raised: *Hydraulic System Disables, Hydrostatic Transmission Disables, Parking Brake Engages*
- ROPS Cab, Open, Tilt Up
- FOPS, Level I
- Top and Rear Windows
- Floor Mat
- Interior Rearview Mirror
- 12 volt Electric Socket
- Horn
- Hand (Dial) Throttle, Electronic
- Adjustable Joystick Controls
- Anti-theft Security System with 6-button Keypad
- Storage Compartment with Netting

### COMFORT PACKAGES

- Open ROPS (C0): *Static Seat (No Foot Throttle, Headliner, Heater or Door)*
- Open ROPS (C1): *Foot Throttle, Headliner, Cup Holder, and choice of Seat (Mechanical Suspension or High Back, Heated, Air Ride Seat) (No Heater or Door)*
- Enclosed ROPS with Heater (C2): *Foot Throttle, Headliner, Heater and Defroster, Side Windows, Cup Holder, Radio Ready, choice of Seat (Mechanical Suspension or High Back, Heated, Air Ride Seat) and Door (Glass or Polycarbonate)*
- Enclosed ROPS with A/C (C3): *C2 + Air Conditioner*

### POWER TRAIN

- Cat C3.3B, Turbo Diesel Engine, Meeting Tier 4 Final and Stage V Emission Standards
- Air Cleaner, Dual Element, Radial Seal
- S-O-S<sup>SM</sup> Sampling Valve, Hydraulic Oil
- Filters, Cartridge-type, Hydraulic
- Filters, Canister-type, Fuel and Water Separator
- Radiator/Hydraulic Oil Cooler (side-by-side)
- Spring Applied, Hydraulically Released, Wet Multi Disc Parking Brakes
- Hydrostatic Transmission, Two Speed Travel
- Suspension – Independent Torsion Axles (4)

### OTHER

- Engine Enclosure, Lockable
- Extended Life Antifreeze, –37° C (–34° F)
- Machine Tie Down Points (6)
- Support, Lift Arm
- Hydraulic Oil Level Sight Gauge
- Radiator Coolant Level Sight Gauge
- Radiator, Expansion Bottle
- Cat ToughGuard<sup>TM</sup> Hose
- Auxiliary, Hydraulics, Continuous Flow
- Heavy Duty, Flat Faced Quick Disconnects with Integrated Pressure Release
- Split D-Ring to Route Work Tool Hoses Along Side of Left Lift Arm
- Electrical Outlet, Beacon
- Belly Pan Cleanout
- Variable Speed Demand Fan
- Product Link<sup>TM</sup> PL243, Cellular

# 289D3 Compact Track Loader

---

## OPTIONAL EQUIPMENT

---

- Hand-Foot Style Controls
- External Counterweights
- Beacon, Rotating
- Engine Block Heater – 120V
- Oil, Hydraulic, Cold Operation
- Paint, Custom
- Heavy Duty Battery, 1,000 CCA
- Product Link PL641, Cellular
- Ride Control
- Bluetooth® Radio with Microphone (AM/FM/Weather Band Receiver with USB and Auxiliary Input Jack)

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2021 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ8200-02 (09-2021)  
Replaces AEHQ8200-01  
(Am North, EU, APD, ANZP)

