



Cat[®] 236D3

SKID STEER LOADER

FEATURES:

The Cat[®] 236D3 Skid Steer Loader, with its radial lift design, delivers impressive mid-lift reach and excellent digging performance with outstanding drawbar power. The 236D3 features the following:

- **Industry leading sealed and pressurized cab option** provides a cleaner and quieter operating environment with excellent work tool visibility.
- **Available high-back, heated, air ride seat with seat mounted adjustable joystick controls** makes the D3 Series the industry leader in operator comfort.
- **High performance power train** provides maximum performance and production capability through the Electronic Torque Management system, optional two speed travel and an electronic hand/foot throttle with decel pedal capability.
- **Cat C2.2 engine and high performance power train** provide high engine horsepower and torque, allowing partial-throttle operation for lower sound levels and fuel consumption.
- **Cat "Intelligent Leveling" system** provides industry leading technology, integration, and available features such as dual direction self level, work tool return to dig and work tool positioner.
- **Speed Sensitive Ride Control option** improves operation on rough terrain, enabling better load retention, increased productivity and greater operator comfort.
- **Maximize machine capability and control** with the standard Advanced Display providing on-screen adjustments for implement response, hystat response and creep control. Also features multi-language functionality with customizable layouts, security system and rearview camera.
- **Ground level access** to all daily service and routine maintenance points helps reduce machine downtime for greater productivity.
- **Broad range of performance matched Cat Attachments** make the Cat Skid Steer Loader the most versatile machine on the job site.
- **Standard Long Lasting LED Work Lights** (front and rear) provide superior job site illumination.

Specifications

Engine

| | | |
|------------------------------------|----------|---------------------|
| Engine Model | Cat C2.2 | |
| Gross Power SAE J1995 | 49.2 kW | 65.9 hp |
| Net Power SAE 1349 | 48.4 kW | 64.9 hp |
| Net Power ISO 9249 | 48.9 kW | 65.6 hp |
| Peak Torque at 1,800 rpm SAE J1995 | 200 N·m | 148 lbf·ft |
| Displacement | 2.2 L | 134 in ³ |
| Stroke | 100 mm | 3.9 in |
| Bore | 84 mm | 3.3 in |

- Engine emits equivalent to U.S. EPA Tier 4 Interim and EU Stage IIIA is offered only for Australia/New Zealand, French Polynesia, Hong Kong, Macedonia and New Caledonia.

Weights*

| | | |
|------------------|---------|----------|
| Operating Weight | 2972 kg | 6,552 lb |
|------------------|---------|----------|

Power Train

Travel Speed (Forward or Reverse):

| | | |
|------------------|-----------|----------|
| One Speed | 12.1 km/h | 7.5 mph |
| Two Speed Option | 18.3 km/h | 11.4 mph |

Operating Specifications*

| | | |
|--|---------|----------|
| Rated Operating Capacity | 825 kg | 1,820 lb |
| Rated Operating Capacity with Optional Counterweight | 915 kg | 2,020 lb |
| Tipping Load | 1650 kg | 3,640 lb |
| Breakout Force, Tilt Cylinder | 2269 kg | 5,003 lb |


Hydraulic System

Hydraulic Flow – Standard:

| | | |
|------------------------------|------------|------------|
| Loader Hydraulic Pressure | 23 000 kPa | 3,335 psi |
| Loader Hydraulic Flow | 76 L/min | 20 gal/min |
| Hydraulic Power (calculated) | 29 kW | 39 hp |



236D3 Skid Steer Loader

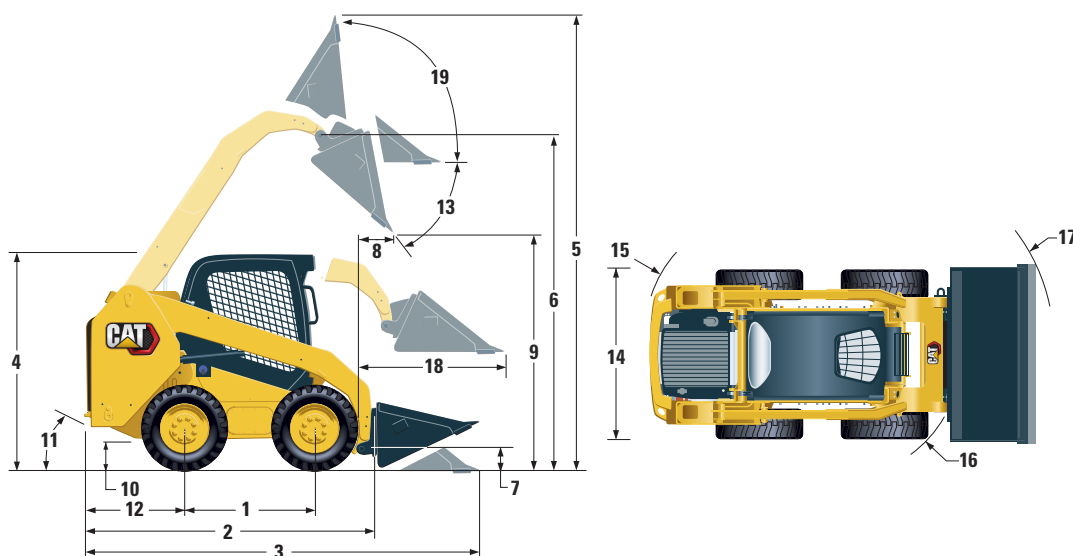

Dimensions*

| | | | | |
|---------------------------------------|---------|----------|---|-----------------|
| 1 Wheelbase | 1105 mm | 43.5 in | 11 Departure Angle | 26° |
| 2 Length without Bucket | 2767 mm | 108.9 in | 12 Bumper Overhang behind Rear Axle | 1021 mm 40.2 in |
| 3 Length with Bucket on Ground | 3487 mm | 137.3 in | 13 Maximum Dump Angle | 48° |
| 4 Height to Top of Cab | 2082 mm | 82.0 in | 14 Vehicle Width over Tires | 1676 mm 66.0 in |
| 5 Maximum Overall Height | 3977 mm | 156.6 in | 15 Turning Radius from Center – Machine Rear | 1639 mm 64.5 in |
| 6 Bucket Pin Height at Maximum Lift | 3122 mm | 122.9 in | 16 Turning Radius from Center – Coupler | 1314 mm 51.8 in |
| 7 Bucket Pin Height at Carry Position | 190 mm | 7.5 in | 17 Turning Radius from Center – Bucket | 2107 mm 83.0 in |
| 8 Reach at Maximum Lift and Dump | 408 mm | 16.0 in | 18 Maximum Reach with Arms Parallel to Ground | 1353 mm 53.3 in |
| 9 Clearance at Maximum Lift and Dump | 2359 mm | 92.9 in | 19 Rack Back Angle at Maximum Height | 91° |
| 10 Ground Clearance | 195 mm | 7.7 in | | |

*Operating Weight, Operating Specifications and Dimensions all based on 75 kg (165 lb) operator, all fluids, one speed, Open Roll Over Protective Structure (OROPS), 1730 mm (68 in) low profile bucket, **Cat 10 × 16.5 tires**, standard flow hydraulics, mechanical suspension seat, no optional counterweights and manual quick coupler (unless otherwise noted).

Cab

| | |
|--|-----------------------|
| Rollover Protective Structure (ROPS) | ISO 3471:2008 |
| Falling Object Protective Structure (FOPS) | ISO 3449:2005 Level I |

Service Refill Capacities

| | | |
|----------------------|-------|----------|
| Chain Box, each side | 8.8 L | 2.3 gal |
| Cooling System | 12 L | 2.6 gal |
| Engine Crankcase | 10 L | 2.2 gal |
| Fuel Tank | 87 L | 19.1 gal |
| Hydraulic System | 50 L | 13.2 gal |
| Hydraulic Tank | 39 L | 10.3 gal |

Noise Level

| | |
|----------------|-----------|
| Inside Cab** | 83 dB(A) |
| Outside Cab*** | 101 dB(A) |

**The declared dynamic operator sound pressure levels per ISO 6396:2008. The measurements were conducted with the cab doors and windows closed and at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

***The labeled sound power level for the CE marked configurations when measured according to the test procedure and conditions specified in 2000/14/EC.

Air Conditioning System (if equipped)

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.81 kg of refrigerant which has a CO₂ equivalent of 1.158 metric tonnes.

MANDATORY EQUIPMENT

- Quick Coupler, Mechanical or Powered
- Highly Visible Seat Belt, 50 mm (2 in) or 75 mm (3 in)
- EU Preparation Package
- Power Train: One Speed, One Speed with Speed Sensitive Ride Control, Two Speed or Two Speed with Speed Sensitive Ride Control
- Tires, 10 × 16.5 or 12 × 16.5

PERFORMANCE PACKAGES

- Performance Package H1: *Standard Flow Hydraulics (No Self Level)*
- Performance Package H2: *Standard Flow Hydraulics, Dual Direction Electronic Self Level (Raise and Lower), Work Tool Return to Dig, Work Tool Positioner, and Electronic Snubbing (Raise and Lower)*

COMFORT PACKAGES

- Open ROPS (C0): *Static Seat (No Foot Throttle, Headliner, Heater or Door)*
- Open ROPS (C1): *Foot Throttle, Headliner, Cup Holder, and choice of Seat (Mechanical Suspension or High Back, Heated, Air Ride Seat) (No Heater or Door)*
- Enclosed ROPS with Heater (C2): *Foot Throttle, Headliner, Heater and Defroster, Side Windows, Cup Holder, Radio Ready, choice of Seat (Mechanical Suspension or High Back, Heated, Air Ride Seat) and Door (Glass or Polycarbonate)*
- Enclosed ROPS with A/C (C3): *C2 + Air Conditioner*

STANDARD EQUIPMENT

ELECTRICAL

- 12 volt Electrical System
- 80 ampere Alternator
- Ignition Key Start/Stop Switch
- Lights: *Gauge Backlighting, Two Rear Tail Lights, Two Adjustable Front and Rear LED Lights, Dome Light*
- Backup Alarm
- Heavy Duty Battery, 850 CCA

OPERATOR ENVIRONMENT

- Advanced Display with Rearview Camera: *Full Color, 127 mm (5 in) LCD screen; Advanced Multi-operator Security System; On-screen Adjustments for Implement Response, Hystat Response and Creep Control*
- Gauges: *Fuel Level, Hour Meter*
- Operator Warning System Indicators: *Air Filter Restriction, Alternator Output, Armrest Raised/Operator Out of Seat, Engine Coolant Temperature, Engine Oil Pressure, Glow Plug Activation, Hydraulic Filter Restriction, Hydraulic Oil Temperature, Parking Brake Engaged, Engine Emission System*
- Adjustable Vinyl Seat
- Fold In Ergonomic Contoured Armrest
- Control Interlock System, when operator leaves seat or armrest raised: *Hydraulic System Disables, Hydrostatic Transmission Disables, Parking Brake Engages*
- ROPS Cab, Open, Tilt Up
- FOPS, Level I
- Top and Rear Windows
- Floor Mat
- Interior Rearview Mirror
- 12 volt Electric Socket
- Horn
- Hand (Dial) Throttle, Electronic
- Adjustable Joystick Controls
- Anti-theft Security System with 6-button Keypad
- Storage Compartment with Netting

POWER TRAIN

- Cat C2.2, Turbo Diesel Engine
- Air Cleaner, Dual Element, Radial Seal
- Scheduled Oil Sampling (S-O-SSM) Sampling Valve, Hydraulic Oil
- Filters, Cartridge-type, Hydraulic
- Filters, Canister-type, Fuel and Water Separator
- Radiator/Hydraulic Oil Cooler (side-by-side)
- Spring Applied, Hydraulically Released Parking Brakes
- Hydrostatic Transmission
- Four Wheel Chain Drive

OTHER

- Engine Enclosure, Lockable
- Extended Life Antifreeze, -36° C (-33° F)
- Machine Tie Down Points (6)
- Support, Lift Arm
- Hydraulic Oil Level Sight Gauge
- Radiator Coolant Level Sight Gauge
- Radiator, Expansion Bottle
- Cat ToughGuard™ Hose
- Auxiliary, Hydraulics, Continuous Flow
- Heavy Duty, Flat Faced Quick Disconnects with Integrated Pressure Release
- Split D-Ring to Route Work Tool Hoses Along Side of Left Lift Arm
- Electrical Outlet, Beacon
- Belly Pan Cleanout
- Variable Speed Demand Fan
- Product Link™ PL243, Cellular

236D3 Skid Steer Loader

OPTIONAL EQUIPMENT

- Hand-Foot Style Controls
- External Counterweights
- Beacon, Rotating
- Engine Block Heater – 120V
- Oil, Hydraulic, Cold Operation
- Product Link PL641, Cellular
- Bluetooth® Radio with Microphone (AM/FM/Weather Band Receiver with USB and Auxiliary Input Jack)



For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2025 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ8218-03 (05-2025)
Replaces AEHQ8218-02
(S Am, AME, Eurasia,
APD-LRC Regions)

