

Introduction

This document provides instructions for installing an accessory on a Cat® Utility Vehicle (CUV). Do not perform any procedure in this document until you have read and understood the information contained in this document and the Operation and Maintenance Manual.

Safety Section

WARNING

Do not operate or work on this product unless you have read and understood the instruction and warnings in the relevant Operation and Maintenance Manuals and relevant service literature. Failure to follow the instructions or heed the warnings could result in injury or death. Proper care is your responsibility.

WARNING

Failure to follow all safety guidelines prescribed in this document and by governing authorities and regulatory agencies may result in severe injury or death of personnel or machine damage.

WARNING

When removing a major component or attachment, ensure that it is properly blocked or secured before removing mounting hardware. An assembly that is disconnected without proper blocking may shift or fall, resulting in serious injury or death of personnel or machine damage.

WARNING

Personal injury or death can result from improper maintenance procedures. To avoid injury or death, follow the procedures exactly as stated below.

WARNING

Personal injury can result from improper handling of chemicals. Make sure you use all the necessary protective equipment required to do the job. Make sure that you read and understand all directions and hazards described on the labels and material safety data sheet of any chemical that is used. Observe all safety precautions recommended by the chemical manufacturer for handling, storage, and disposal of chemicals.

WARNING

Before servicing/performing maintenance on the machine, electrical power must be physically disconnected; battery cables must be disconnected from the battery. All applicable lock out and tag out procedures must be followed.

WARNING

Observe the safe working load limits of all lifting and blocking devices and keep a safe distance from suspended/blocked loads. Personnel may be seriously injured or killed by falling loads.

WARNING

Do not operate the machine if any guards or covers are missing or inadequately secured. Personnel could be seriously injured or machine damage may occur.

Caterpillar®

Installation Instructions - Accessory Kit

Rearview Mirror Kit


(p/n 548-9159)



■ **NOTE:** Read these Installation Instructions thoroughly before beginning the installation process. Retain these Installation Instructions for future reference.

Kit includes:

Ref. No.	QTY	DESCRIPTION
1	1	Ball Joint
2	1	Mirror Body
3	1	Mirror Glass
4	1	Joint Plate
5	3	Button-Head Screw (M4 x 12 mm)
6	1	Button-Head Screw (M8 x 16 mm)
7	1	Flat Washer (M8)
8	1	Mirror Mount
9	2	Flange Nut (M6)
10	2	Machine Screw (M6 x 40 mm)

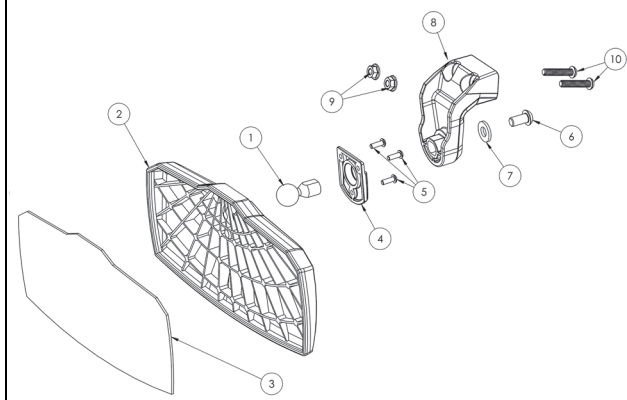


Tools Required:

- 15/64-in. Drill Bit w/Power Drill
- T30 Torx Bit
- 10 mm Wrench/Socket

1. Locate the two dimples in the center of the upper ROPS frame; then using a 15/64-in. drill bit, drill out both mounting locations. See Fig. 1.

Fig. 1

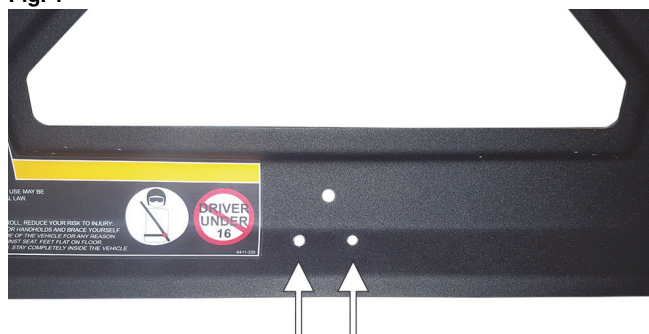


ROV-865

2. Secure Mirror Mount to the inside of the front ROPS frame by inserting two Machine Screws (M6 x 30 mm) from the exterior side and fastening using two M6 Flange Nuts. Tighten securely. See Fig. 2.

■ **NOTE:** Installing the flange nuts on the exterior side of the ROPS may damage other accessories.

Fig. 2

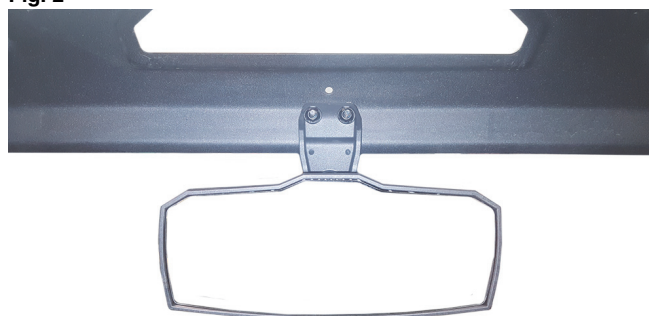

ROV-997

3. Remove the protective film from the mirror glass.