



# Cat<sup>®</sup> PM822

## Cold Planer

*The Cat<sup>®</sup> PM822 cold planer brings maximum power and advanced cutting capabilities, with Cat GRADE with Grade and Slope technology to increase cutting precision. Smooth and efficient performance with multiple rotor speeds lowers fuel consumption, while long service intervals and easy access to critical components simplifies service. Many options are available to enhance machine capability on a cold planer that is built to maximize production.*

*Not all features available in all regions. Consult your Cat dealer for specific configurations available in your region. Built in the U.S.A. for the North American market.*

### Efficient Performance with More Power

- Powerful Cat<sup>®</sup> C18 twin-turbo engine meets regional emission standards
- Smooth and efficient operation with Automatic Idle Control and multiple rotor speeds optimize output and demand on the engine
- High capacity cooling system keeps engine at ideal temperatures for optimal fuel efficiency and lower emissions
- Automatic load sensing on the rotor adjusts milling speed to prevent stalls and optimize production

### Optimal Maneuverability and Control

- Reliable track undercarriage leverages proven designs from Cat dozers and an automatic tensioning system to ensure consistent performance and longer track life
- Robust propel system features two independent propel pumps to drive two crawler tracks each, in a high-traction, cross-drive pattern
- Automatic traction control maintains consistent speed in the most challenging applications
- Four steering modes with advanced alignment and tracking provides precise steering geometry and reduces track pad wear
- Ability to electronically switch between rotor speeds during operation

### Efficient Material Removal

- High-capacity conveyors provide efficient removal of milled material with outstanding discharge control
- A wide opening and seamless belt effectively clear the rotor chamber
- Adjust the belt speed to match material type and production rate, while the built in “boost” feature provides a temporary surge in belt speed to eject material faster and farther
- The belt reverses for faster clean-up, while magnetic vinyl covers provide quick access to inspect the rollers for wear

### Comfortable Work Environment

- Operate in comfort with height-adjustable operating consoles and intuitive, ergonomic controls
- Retractable handrails stow and redeploy easily when approaching obstacles
- Work day or night with backlit keypads and illuminate the work area around the machine with wide-dispersion and perimeter LED lighting options
- Upgrade operator stations with optional suspension seats that reposition for improved visibility and comfort
- Optional remote cameras enhance visibility to the cutting edge and conveyor
- The single post, forward-folding powered canopy option with overhead LED lighting and integrated side extensions quickly stows and redeploys during operation to clear overhead obstacles with the simple push of a button, and optional windscreens can be added for increased comfort
- Maximize dust removal from the working areas with the optional dust abatement system



# Cat® PM822 Cold Planer

---

## Durable and Dependable Cutting System

- The rotor drive system features a heavy-duty dry clutch, automatic belt-tensioning to prevent slippage and two high tensile (five-rib) belts to drive the rotor
- Reinforced cutting chamber offers enhanced durability
- Improved access simplifies rotor changes
- Hardened full length side plate skis, inboard ski shoe, and anti-slab shoes reduce wear and maintenance

## Boost Precision with Integrated Cat Technology

- Achieve accurate, repeatable and automatic cutting precision with the integrated Cat GRADE with Grade and Slope system
- Control boxes can be repositioned without the need to reconfigure settings and the background color changes to night mode when the work lights are activated
- Obtain full control of grade and slope from any control box
- Seamlessly switch between multiple grade sensors for uninterrupted accuracy during milling
- Adjust the speed at which the rotor drops into the cut for optimal machine control
- Set and automate transitions in/out of cuts and save settings for future jobs
- Clear obstacles in the cutting path with ease using the obstacle jump feature
- Enhance for full 3D milling operation (additional hardware required)

## High Production System K Rotors Optimize Cutting Capability

- Cat System K rotors feature efficient material flow with an excellent cutting pattern for numerous applications
- A tapered dual-retention design secures toolholders in place without a retaining pin, bolt or setscrew, speeding up replacement and eliminating the need for fasteners or torquing
- Reversible paddles and high strength alloys reduce wear and abrasion to extend rotor life
- Optional diamond bits can extend replacement intervals up to 80 times longer than conventional carbide bits

## Simplified Service

- Maintenance is easier and faster with large service doors and power hood for walk-in access to critical components
- Maintenance-free track components and easy to replace track pads lower service costs
- Standard ground-level controls and an optional electrically-operated rotor turning device with pendant simplify bit removal and replacement
- High and low pressure washdown options connect to the onboard water tank for convenient clean-up
- Operate select machine functions during maintenance and service with the accessory drive system
- Electrical system wiring is color-coded and numbered for easy identification and wrapped in a protective, abrasion-resistant nylon braid for longer life
- Extended hydraulic oil service intervals: 3000 hours without oil sampling, 6000 hours with oil sampling
- Track scheduled maintenance with Cat Product Link™ telematics services
- Electronic Control Modules (ECMs) monitor machine systems to alert the operator of performance issues and can be paired with Product Link options to enable additional remote services with your local Cat dealer
- Multi-piece, cartridge-style engine filters are environmentally friendly, reducing waste and lowering replacement costs
- Convenient parts availability, dealer locations and service repair kits simplify ordering of high wear components

## Convenience Features

Cat cold planers offer a variety of features and options designed to make daily operation and maintenance tasks easier.

- Pause and resume machine functions with the push of a button during truck exchanges
- Optional magnetic paint can holders
- Hooks for water hose storage
- Angled water fill connection
- Easily accessible shovel holder
- Top and side view rotor depth indicators
- Compressed air connection in center operator console

**Standard and Optional Equipment**

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>OPERATOR ENVIRONMENT</b>			<b>POWERTRAIN</b>		
Ground control keypads	✓		Auto engine idle control	✓	
Single high-resolution LCD touchscreen display	✓		High capacity cooling system	✓	
12-volt power receptacle	✓		Dual propel pumps	✓	
Dual high-resolution LCD touchscreen displays		✓	Automatic load control	✓	
Hydraulically folding canopy with LEDs		✓	CE certificate		✓
Air-ride suspension seats		✓	<b>HYDRAULIC SYSTEM</b>		
Windscreens		✓	Dual pump hydraulic propel system	✓	
<b>CAT CONNECT TECHNOLOGY</b>			Traction control	✓	
Cat Product Link	✓		Water tank transfer pump		✓
Cat GRADE	✓		Fuel transfer pump		✓
Inboard ski		✓	<b>SERVICE AND MAINTENANCE</b>		
Sonic sensor (averaging or string line)		✓	Sampling ports for Scheduled Oil Sampling (S-O-S <sup>SM</sup> )	✓	
Ground level grade controls and displays		✓	Power hood	✓	
<b>CONVEYOR</b>			Platform-level engine oil dipsticks	✓	
Grease tensioner	✓		Rotor chamber water spray system	✓	
Material removal boost feature	✓		Air compressor	✓	
Dust abatement system		✓	Accessory drive system	✓	
Remote camera (loading conveyor)		✓	3400 L (898 gal) onboard water tank	✓	
<b>ROTOR SYSTEM</b>			Side water fill valve	✓	
Automatic plunge-cut	✓		High pressure washdown		✓
Automatic transition feature	✓		Low pressure washdown		✓
Obstacle jump	✓		Additional spray bars		✓
Three cutting speeds	✓		<b>SAFETY AND SECURITY</b>		
System K Rotor - Coarse (25 mm)		✓	Platform handrails	✓	
System K Rotor - Coarse (18 mm)		✓	Signaling/warning horn	✓	
System K Rotor - Standard (15 mm)		✓	Wide-dispersion LED work lights	✓	
System K Rotor - Fine (8 mm)		✓	Perimeter LED strip lights		✓
System K Rotor - Micro (6 mm)		✓	Magnetic LED work light		✓
System H Rotor - Micro (6 x 2 mm)		✓	Warning beacon (fixed or magnetic mount)		✓
Diamond bits		✓	Truck signal lights		✓
Bit bucket trays		✓	Remote camera (rear, front, magnetic mount)		✓
Pneumatic bit removal tool		✓			
Tool holder extractor		✓			
Rotor turning device with pendant control		✓			

# Cat® PM822 Cold Planer

## Technical Specifications


Engine			
Engine Model	Cat C18 twin-turbo		
<b>U.S. EPA Tier 4 Final, EU Stage V</b>			
Gross Engine Power – SAE J1995	597 kW	800.6 hp	
Gross Engine Power – ISO 14396	590.7 kW	792.1 hp	
<b>Equivalent to U.S. EPA Tier 2 and EU Stage II</b>			
Gross Engine Power – SAE J1995	570.5 kW	765 hp	
Gross Engine Power – ISO 14396	567.5 kW	761 hp	
Build Number	02B		
Maximum Milling Speed	100 m/min	328 ft/min	
Maximum Travel Speed	5.9 km/h	3.7 mph	

Cutting System			
Milling Width	2235 mm	88.0 in	
Number of Bits (15 mm spacing)	185		
Maximum Cutting Depth	330 mm	13.0 in	
Rotor Speeds	100 / 109 / 118 rpm		
Minimum Left Cutting Radius	2.00 m	6.56 ft	
Minimum Right Cutting Radius	1.80 m	5.91 ft	

Machine Weight			
Operating Weight	36 700 kg	80,910 lb	
Transport Weight	32 800 kg	72,312 lb	

Weights shown are approximate and include:


- Operating weights include coolants, lubricants, full fuel tank, full water tank and 75 kg (165 lb) operator.
- Transport weights include coolants, lubricants, 50% full fuel tank and empty water tank.

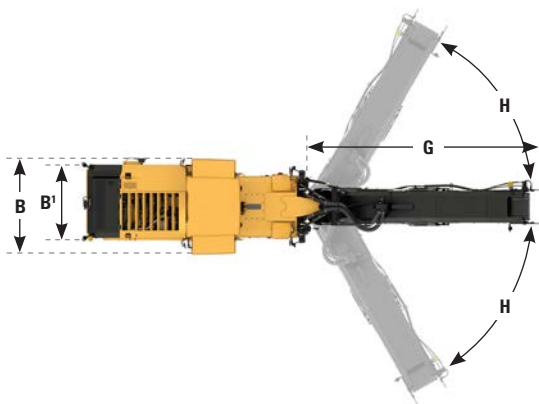

Service Refill Capacities			
Fuel Tank	1108 L	292.7 gal	
Cooling System	104 L	27.5 gal	
Engine Oil	65 L	17.2 gal	
Hydraulic Oil	113 L	29.9 gal	
Water Tank	3400 L	898.2 gal	

Operating Dimensions			
<b>A</b> Overall Length (conveyor raised)	14.52 m	47.64 ft	
<b>B</b> Maximum Machine Width	3.11 m	10.20 ft	
<b>B'</b> Minimum Machine Width	2.74 m	8.99 ft	
<b>C</b> Maximum Height (conveyor raised)	5.23 m	17.16 ft	
<b>D</b> Height to Optional Canopy	4.05 m	13.29 ft	
<b>E</b> Height (canopy lowered)	3.00 m	9.84 ft	
<b>F</b> Maximum Truck Clearance	4.86 m	15.94 ft	
<b>G</b> Conveyor Length	8.38 m	27.49 ft	
<b>H</b> Conveyor Swing	±60° from center		

Shipping Dimensions			
<b>I</b> Transport Length	12.43 m	40.78 ft	
<b>B'</b> Transport Width	2.74 m	8.99 ft	
<b>E</b> Transport Height (canopy lowered)	3.00 m	9.84 ft	
<b>J</b> Length (track to track)	6.69 m	21.95 ft	
<b>K</b> Length of Machine (rear to front track)	7.32 m	24.02 ft	
<b>L</b> Length of Base Machine	8.33 m	27.33 ft	

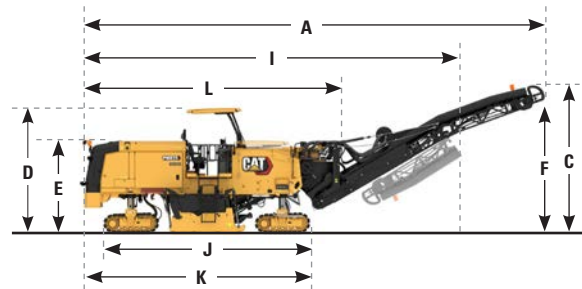

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2020 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

VisionLink is a trademark of Trimble Navigation Limited, registered in the United States and in other countries.

QEHQ2730 (08-2020)  
Build Number: 02B  
(Global)

