

432

Backhoe Loader



Proven Cat® Engine

Powered with proven and reliable Cat® engine. There are two engine options available. Tier 2 equivalent 3054C engine and Tier 3 equivalent C4.4 engine, both with 74.5 kW power rating. All the options deliver superior performance with best in class fuel efficiency.

Operator Comfort and Control

Standard Pilot Hoe Controls provides smooth and comfort to operators. These controls mounted on fully adjustable pods offer the operator finer controls whilst giving improved ergonomics.

Powershift Transmission

The 4 speed powershift transmission, improves operator comfort by utilizing the Power Shuttle Lever to shift gears. There is no floor-mounted gear shift lever, improving the already spacious work environment.

Excavator Style Boom

The Excavator Style Boom is iconic to Cat BHL's. This gives the operator more dig depth and reach when working around obstacles meaning less repositioning of the machine is required.

Powerful and Efficient Hydraulics

The load sensing and closed center hydraulic system actively matches power and flow to the demand and delivers best in class fuel efficiency and better component life. Flow sharing valves provide greater control and precision to the operation.

Power Management Modes

The operator can choose between Eco Mode, or Standard Mode dependent on job and site conditions. Eco mode will save the operator fuel, lowering their owning and operating costs.

Product Link™

Product Link™ comes as standard on Cat BHL's (however, it depends on the local restrictions if any). Cat Product Link offers data like machine location, Service Meter Units (Hours) (SMU), etc.

432 Backhoe Loader Specifications

Engine

	432 Standard Offering Tier 2 Equivalent	432 Optional Offering Tier 3 Equivalent
Engine	3054C 74.5 kW Mechanical Turbo	C4.4 74.5 kW Electronic Turbo Intercooled
Ratings at 2,200 rpm		
Gross Power SAE J1995	75 kW/102 hp	76 kW/104 hp
Gross Power ISO 14396	74.5 kW/101 hp	74.5 kW/101 hp
Net Power Rating @ 2,200 rpm		
SAE J1349	70 kW/95 hp	69 kW/94 hp
ISO 9249	71 kW/96 hp	70 kW/95 hp
Torque Rise (net)	31% @ 1,400 rpm	32% @ 1,400 rpm
Net Torque – SAE J1349	397 N·m	398 N·m
Bore	105 mm	105 mm
Stroke	127 mm	127 mm
Displacement	4.4 L	4.4 L
No De-Rating Required Up To	2286 m	2286 m

• Net power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler and alternator.

Transmission

Travel speeds of backhoe loader at full throttle, when equipped with 440/80-28 rear tires.

	Powershift Transmission (Standard)	Auto-Shift Transmission (Optional)	Auto-Shift Transmission with Lock-Up Torque Converter (Optional)
Forward			
1st	6 km/h	6 km/h	6 km/h
2nd	9.5 km/h	9.5 km/h	9.5 km/h
3rd	19.8 km/h	12.5 km/h	12.5 km/h
4th	40 km/h	19.8 km/h	19.8 km/h
5th	—	27.3 km/h	27.3 km/h
6th	—	40 km/h	40 km/h
Reverse			
1st	6 km/h	6 km/h	6 km/h
2nd	12.5 km/h	12.5 km/h	12.5 km/h
3rd	27.3 km/h	27.3 km/h	27.3 km/h
4th	—	—	—

432 Backhoe Loader Specifications

Axle Ratings

Front Axle, AWD	
Static	23 500 kg
Dynamic	9000 kg
Rear Axle	
Static	26 500 kg
Dynamic	10 000 kg

Weights*

Operating Weight*	8444 kg	
Operating Weight (maximum) (ROPS capacity)	11 000 kg	
Cab, ROPS/FOPS	Standard	
Powershift Transmission	Standard	
Ride Control	15 kg	
Air Conditioning	Standard	
MP Bucket (1.03 m ³)		
with Fold-over Forks	860 kg	
without Fold-over Forks	611 kg	
Loader QC	185 kg	
4.3 m Extendible Stick (excludes front counterweight)	199 kg	
4.9 m Extendible Stick (excludes front counterweight)	355 kg	
Counterweights		
Base	115 kg	
Stackable, One	240 kg	
Maximum	460 kg	
Minimum Counterweight Recommendations – Standard Stick		
Loader Bucket	No QC	IT Loader with QC
GP	240 kg	460 kg
MP	0 kg	460 kg
Minimum Counterweight Recommendations – Extendible Stick		
Loader Bucket	No QC	IT Loader with QC
GP	460 kg	460 kg
MP	115 kg	460 kg
Total Gross Weight Not to Exceed	11 000 kg	

*Machine Configuration – LRC 74.5 kW engine; 4.3 m standard stick hoe; standard cab with A/C; AWD powershift transmission; 1.03 m³ MP loader bucket; 600 mm standard duty hoe bucket; 340/80-18 and 440/80-28 tires; no counterweight; 80 kg operator; full fuel tank.

Hydraulic System

Type	Closed Center
Pump Type	Variable-Flow, Axial Piston
Pump Capacity @ 2,200 rpm	187 L/min
System Pressure	
Backhoe	250 bar
Loader	250 bar

Steering

Type	Front Wheel
Power Steering	Hydrostatic
AWD Cylinder, One (1) Double-acting	
Bore	65 mm
Stroke	106 mm
Rod Diameter	40 mm
Axle Oscillation	11 mm

Turning Circle


AWD (inner wheel not braked)	
Outside Front Wheels	8.205 m
Outside Widest Loader Bucket	10.745 m

Service Refill Capacities

Cooling System with A/C	18 L
Fuel Tank	160 L
Engine Oil with Filter	9 L
Diesel Exhaust Fluid	19 L
Transmission (Power Shuttle)	
AWD	18 L
Transmission (Powershift)	
AWD	19 L
Rear Axle	16 L
Planetaries	1.7 L
Front Axle (AWD)	11 L
Planetaries	0.7 L
Hydraulic System	95 L
Hydraulic Tank	42 L

432 Backhoe Loader Specifications

Machine Dimensions

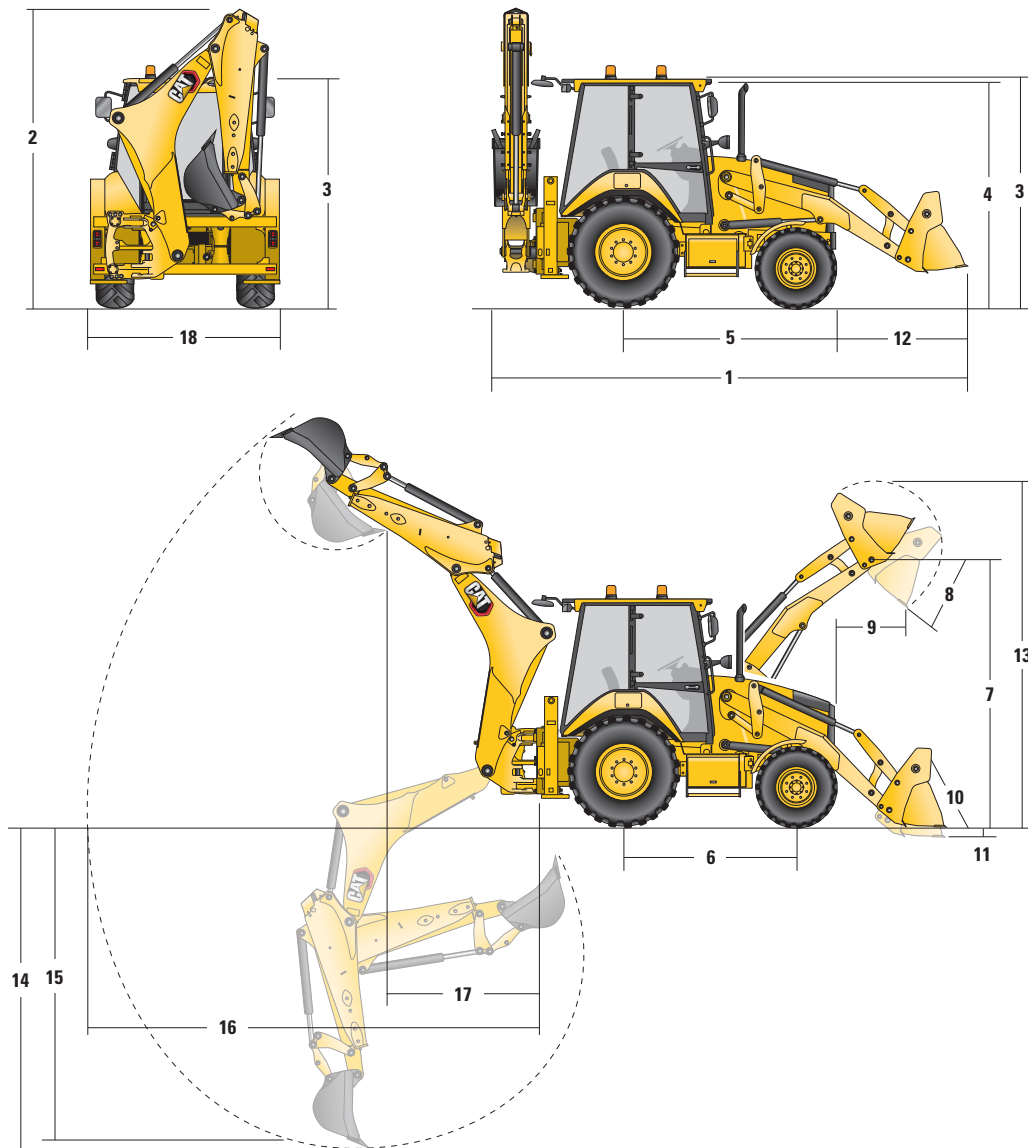

	Parallel Lift Loader			Parallel Lift Loader with QC	
	GP – 1.0 m ³	MP – 1.03 m ³	MP with Forks – 1.03 m ³	GP/QC – 1.0 m ³	MP/QC – 1.03 m ³
1 Overall Length in Roading Position	5763 mm	5744 mm	5744 mm	5847 mm	5760 mm
Overall Transportation Length	5775 mm	5731 mm	5731 mm	5884 mm	5778 mm
2 Overall Transportation Height	3806 mm	3806 mm	3806 mm	3806 mm	3806 mm
Overall Width	2352 mm	2352 mm	2352 mm	2352 mm	2352 mm
3 Height to Top of Cab/Canopy	2822 mm	2822 mm	2822 mm	2822 mm	2822 mm
4 Height to Top of Exhaust Stack	2715 mm	2715 mm	2715 mm	2715 mm	2715 mm
5 Rear Axle Centerline to Front Grill	2705 mm	2705 mm	2705 mm	2705 mm	2705 mm
6 Wheelbase 2WD/AWD	2200 mm	2200 mm	2200 mm	2200 mm	2200 mm

Dimensions and performance specifications shown are for machines equipped with 12.5/80-18 SGL front tires, 16.9-28 rear tires, standard cab, 4.3 m standard stick with 600 mm standard duty bucket, and 1.03 m³ MP loader bucket and standard equipment unless otherwise specified.

432 Backhoe Loader Specifications

Loader Bucket Dimensions and Performance

	Parallel Lift Loader			Parallel Lift Loader with QC	
	GP – 1.0 m ³	MP – 1.03 m ³	MP with Forks – 1.03 m ³	GP/QC – 1.0 m ³	MP/QC – 1.03 m ³
Capacity (SAE rated)	1.0 m ³	1.03 m ³	1.03 m ³	1.03 m ³	1.03 m ³
Width	2406 mm	2406 mm	2406 mm	2406 mm	2406 mm
Lift Capacity at Maximum Height	3728 kg	3488 kg	3303 kg	3509 kg	3278 kg
Lift Breakout Force	54 791 N	53 252 N	51 536 N	51 669 N	50 841 N
Tilt Breakout Force	54 292 N	59 845 N	58 900 N	48 223 N	53 400 N
Tipping Load at Breakout Point	6695 kg	6674 kg	6518 kg	6157 kg	6339 kg
7 Maximum Hinge Pin Height	3462 mm	3462 mm	3462 mm	3462 mm	3462 mm
8 Dump Angle at Full Height	45°	45°	45°	45°	45°
Dump Height at Maximum Angle	2755 mm	2780 mm	2780 mm	2669 mm	2749 mm
9 Dump Reach at Maximum Angle	805 mm	732 mm	732 mm	838 mm	784 mm
10 Maximum Bucket Rollback at Ground Level	38°	39°	39°	39°	38°
11 Digging Depth	99 mm	132 mm	132 mm	137 mm	118 mm
Maximum Grading Angle	113°	116°	116°	112°	114°
12 Grill to Bucket Cutting Edge, Carry Position	1488 mm	1471 mm	1471 mm	1571 mm	1487 mm
13 Maximum Operating Height	4328 mm	4365 mm	4365 mm	4361 mm	4407 mm
Weight (does not include teeth)	427.5 kg	611.2 kg	705 kg	459 kg	697 kg

Backhoe Dimensions and Performance

	Standard Stick – 4.3 m	E-stick Retracted – 4.3 m	E-stick Extended – 4.3 m	E-stick Retracted – 4.9 m	E-stick Extended – 4.9 m
	14 Digging Depth, SAE Maximum	4298 mm	4301 mm	5292 mm	4636 mm
Digging Depth, Manufacturer's Maximum	4778 mm	4782 mm	5700 mm	5201 mm	6169 mm
15 Digging Depth, 2400 mm Flat Bottom	3915 mm	3919 mm	4987 mm	4293 mm	5373 mm
Digging Depth, 600 mm Flat Bottom	4255 mm	4259 mm	5254 mm	4611 mm	5632 mm
Digging Depth, 600 mm Flat Bottom, Manufacturer's	4753 mm	4758 mm	5700 mm	5164 mm	6150 mm
Reach from Rear Axle Centerline at Ground Line	6741 mm	6746 mm	7672 mm	7218 mm	8169 mm
16 Reach from Swing Pivot at Ground Line	5651 mm	5656 mm	6582 mm	6128 mm	7079 mm
Maximum Operating Height	5665 mm	5666 mm	6265 mm	6231 mm	6956 mm
Loading Height	3991 mm	4000 mm	4599 mm	4555 mm	5280 mm
17 Loading Reach	1690 mm	1639 mm	2501 mm	1559 mm	2319 mm
Swing Arc	180°	180°	180°	180°	180°
Bucket Rotation	205°	205°	205°	205°	205°
18 Stabilizer Overall Width	2352 mm	2352 mm	2352 mm	2352 mm	2352 mm
Bucket Dig Force	63 447 N	63 419 N	63 419 N	63 427 N	63 427 N
Stick Dig Force	42 835 N	43 548 N	31 743 N	47 251 N	35 180 N

432 Standard and Optional Equipment

Standard and Optional Equipment

Standard and Optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
Cab ROPS and FOPS			Hydraulics		
Cab, Standard	✓		Variable Displacement Piston Pump	✓	
Cab, Deluxe		✓	Hydraulic Quick Disconnects		✓
Tires/Steering/Brakes			Side Shift Lock	✓	
All Wheel Drive	✓		Hydraulic Oil Cooler	✓	
100% Differential Lock	✓		Hydraulic Lines, One Way		✓
Hydraulic Boosted Brakes	✓		Hydraulic Lines, Two Way		✓
Tires 26 inch	✓		Loader Kickout, Float	✓	
Tires 28 inch		✓	Loader Kickout, Return to Dig	✓	
Engine/Transmission			Powered Side Shift		✓
Engine Cat 3054C 74.5 kW	✓		Ride Control		✓
Engine C4.4 74.5 kW		✓	Continuous Flow	✓	
Battery, 750 CCA, Standard	✓		Programmable Auxiliary Flow	✓	
Battery, 750 CCA, Heavy Duty		✓	Booms, Sticks and Linkages		
Hinged Radiator Pack	✓		Stick Standard, 4.3 m	✓	
Forward-Neutral-Reverse (FNR) on Loader Lever	✓		Stick Extending, 4.3 m		✓
Eco Mode	✓		Stick Extending, 4.9 m		✓
Standard Mode	✓		Hoe Quick Coupler, Mechanical		✓
Engine Block Heater		✓	Hoe Quick Coupler, Hydraulic		✓
Transmission Neutralizer	✓		Loader Quick Coupler, Hydraulic		✓
Transmission, Four Speed Powershift	✓		Transport Lock, Swing	✓	
Transmission, Six Speed Automatic		✓	Transport Lock, Boom	✓	
Transmission, Six Speed Automatic with LUTC		✓	Other Attachments		
Controls			Counterweight, 115 kg		✓
Controls, Pilot Joysticks	✓		Counterweight, 240 kg		✓
Pattern Selector (ISO/SAE)	✓		Counterweight, 460 kg		✓
Power Steering, Hydrostatic	✓		Front Fenders		✓
			Street Pads, Stabilizers		✓
			External Tool Box	✓	
			Transport Tie Downs	✓	
			Electrical		
			Product Link Cellular	✓	
			Product Link Satellite		✓
			Reversing Alarm	✓	
			Stabilizer Alarm	✓	
			Beacon, Rotating		✓
			Beacon, Strobe		✓

432 Backhoe Loader

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2020 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ8258-01 (05-2020)
Replaces AEHQ8258
Build Number: 07
(AME, CIS, ANZP, SEA)

