

Cat® C18

Diesel Generator Sets



Standby & Prime: 60 Hz



Image shown might not reflect actual configuration

Engine Model	Cat® C18 In-line 6, 4-cycle diesel
Bore x Stroke	145 mm x 183 mm (5.7 in x 7.2 in)
Displacement	18.13 L (1106.3 in ³)
Compression Ratio	14
Aspiration	Turbocharged Air-to-Air Aftercooled
Fuel Injection System	Electronic Unit Injection
Governor	Electronic ADEM™ A4

Model	Standby	Prime	Emission Strategy
DE750SE0	750 kW	680 kW	Low BSFC


PACKAGE PERFORMANCE

Performance	Standby	Prime
Frequency	60 Hz	60 Hz
Genset Power Rating	937.5 kVA	850 kVA
Genset power rating with fan @ 0.8 power factor	750 kW	680 kW
Emissions	Low BSFC	
Performance Number	EM3836	EM3837
Fuel Consumption		
100% load with fan, L/hr (gal/hr)	203.7 (53.8)	186.8 (49.3)
75% load with fan, L/hr (gal/hr)	148.5 (39.2)	133.3 (35.2)
50% load with fan, L/hr (gal/hr)	99.2 (26.2)	91.5 (24.2)
25% load with fan, L/hr (gal/hr)	58.5 (15.5)	54.8 (14.5)
Cooling System¹		
Radiator air flow restriction (system), kPa (in. Water)	0.12 (0.48)	0.12 (0.48)
Radiator air flow, m ³ /min (cfm)	NA	
Engine coolant capacity, L (gal)	21 (5.5)	21 (5.5)
Radiator coolant capacity, L (gal)	89 (23.5)	89 (23.5)
Total coolant capacity, L (gal)	110 (29.1)	110 (29.1)
Inlet Air		
Combustion air inlet flow rate, m ³ /min (cfm)	67.0 (2364.8)	65.3 (2304.7)
Max. Allowable Combustion Air Inlet Temp, °C (°F)	49 (120)	49 (120)
Exhaust System		
Exhaust stack gas temperature, °C (°F)	444.5 (832.1)	424.4 (795.9)
Exhaust gas flow rate, m ³ /min (cfm)	167.6 (5918)	157.7 (5568.5)
Exhaust system backpressure (maximum allowable) kPa (in. water)	NA	
Heat Rejection		
Heat rejection to jacket water, kW (Btu/min)	230 (13091)	211 (12019)
Heat rejection to exhaust (total) kW (Btu/min)	733 (41680)	673 (38259)
Heat rejection to aftercooler, kW (Btu/min)	265 (15091)	247 (14056)
Heat rejection to atmosphere from engine, kW (Btu/min)	109 (6199)	101 (5762)
Emissions (Nominal)²		
NO _x , mg/Nm ³ (g/hp-hr)	2543.7 (5.51)	2290.4 (5.04)
CO, mg/Nm ³ (g/hp-hr)	216 (0.47)	144.4 (0.31)
HC, mg/Nm ³ (g/hp-hr)	37.2 (0.09)	27.3 (0.07)
PM, mg/Nm ³ (g/hp-hr)	19.6 (0.05)	15.2 (0.04)

ALTERNATOR DATA

Alternator ³								
Voltages, V	220	480	440	380	220	480	440	380
Motor starting capability @ 30% Voltage Dip, skVA	2666	2501	2129	2029	2666	2501	2129	2029
Current, A	2460.3	1127.6	1230.1	1424.4	2230.7	1022.4	1115.3	1291.4
Frame Size	LC7224N	LC7224L	LC7224L	LC7224N	LC7224N	LC7224L	LC7224L	LC7224N
Excitation	AREP	AREP	AREP	AREP	AREP	AREP	AREP	AREP
Temperature Rise, °C	105	105	130	150	105	125	125	125

WEIGHTS & DIMENSIONS

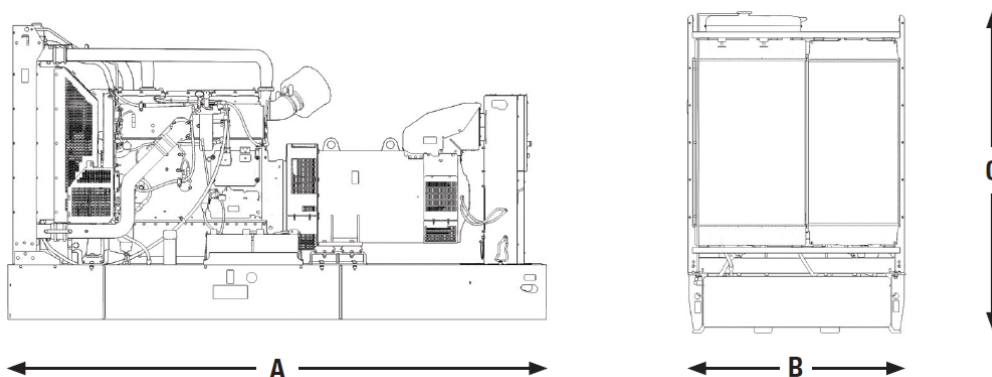

Length "A" mm (in)	Width "B" mm (in)	Height "C" mm (in)	Dry Weight kg (lb)
3910 (154)	1461 (58)	2156 (85)	3862 (8514)

Note: General configuration not to be used for installation. See general dimension drawings for detail.

APPLICABLE CODES AND STANDARDS:

AS1359, CSA C22.2 No100-04, UL142, UL489, UL869, UL2200, NFPA37, NFPA70, NFPA99, NFPA110, IBC, IEC60034-1, ISO3046, ISO8528, NEMA MG1-22, NEMA MG1-33, 2006/95/EC, 2006/42/EC, 2004/108/EC.

Note: Codes may not be available in all model configurations. Please consult your local Cat Dealer representative for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

PRIME: Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year

RATINGS: Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions.

DEFINITIONS AND CONDITIONS

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

² Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 BTU/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

³ UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.

LET'S DO THE WORK.™