

Cat[®] NGEO[™] SYN HP

(Natural Gas Engine Oil Synthetic High Performance)

Engine Oil for Natural Gas High Performance Engines



Cat[®] G3500 natural gas engines are highly engineered with advanced combustion systems to deliver high power density. Cat NGEO[™] SYN HP is a synthetic, high-performance engine oil developed to achieve the exceptional performance and highest power output for these engines.

Designed to Make The Difference

2x

Extends oil drain intervals compared to typical gas engine oils when following Caterpillar guidelines



Reduces downtime by improving combustion stability



Maintains engine durability and reduces wear thanks to its high chemical, thermal and shear stability



Reduces oil consumption: low volatility minimizes oil burn off and evaporation loss



Sustains engine health by minimizing deposits and sludge



These benefits all add up to less oil consumption and waste, reduced labor costs, increased engine performance and maintaining engine health. >>>



Recommended use:

This oil is designed for full compatibility with G3500 high power density engines used for load management in:

- Standby applications
- Continuous duty applications

The use of Cat NGE0 SYN HP requires special considerations:

- This oil requires specialized filters compatible with synthetic base stock oils. These filters are available through your Cat dealer
- When switching to Cat NGE0 SYN HP, it is required to flush the engine to under 3% in volume in order to reduce cross contamination
- Elastomers and other components may need to be replaced before using Cat NGE0 SYN to ensure total compatibility
- See your OMM or contact your Cat dealer for additional information

The typical characteristics below are provided for general information about the product. They do not determine the capability or performance of an engine oil.

Typical Characteristics*	
SAE Viscosity Grade	40
Flash Point, °C (ASTM D92)	190 min
Pour Point, °C (ASTM D97)	-30
Sulfated Ash, % wt. (ASTM D874)	0.5 min.
Total Base Number, mg KOH/g (ASTM D2896)	10.5
Viscosity (ASTM D445) Kinematic, cSt @ 100°C	13.1

*Values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

Health and Safety


Always read and understand the Safety Data Sheet (SDS) before using this product.

For a copy of the SDS, visit us on the web at:
www.catmsds.com

LET'S DO THE WORK.™

PEHJ0729

© 2020 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

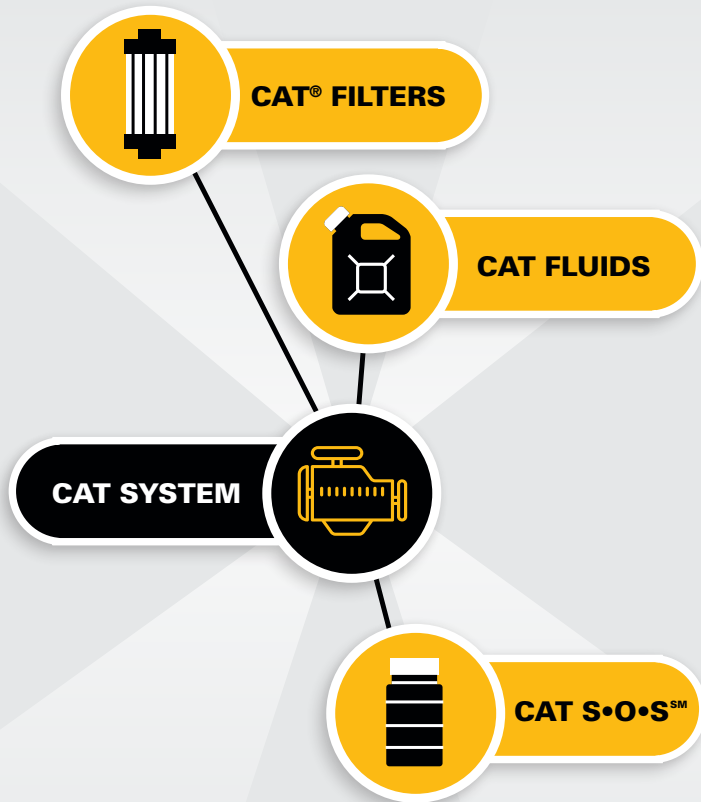

Cat filters and fluids are designed alongside Cat equipment ensuring optimal performance and customer value.

Take A Closer Look cat.com/filtersandfluids

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT

We offer you the right parts and service solutions, when and where you need them.

The Cat dealer network of highly trained experts keeps your entire fleet up and running to maximize your equipment investment.

