

Cat[®] TDTO Cold Weather[™]



Best Performance and Protection for Cold Weather Applications

Cat[®] TDTO Cold Weather[™] is a synthetic lubricant blend that provides superior performance and protection in transmissions, torque converters, final drives, hydraulics, and/or wet brakes at temperatures down to -40°F (-40°C). The special formulation creates optimal friction performance and controls transmission slippage while eliminating clutch glazing. Cat TDTO Cold Weather has excellent compatibility with all materials used in Cat machines, including friction materials, seals, and elastomers. The outstanding thermal stability and oxidation resistance gives Cat TDTO Cold Weather long drain intervals.

Benefits

Performance

- Easier engine starts in harsh cold climates
- Greater Machine Rim Pull and Breakout Force
- Long drain intervals

Protection

- Promotes Transmission Durability
- Increased Clutch, Gears, and Bearing Life
- Optimal Cold Weather Friction Performance

Convenience


- Single oil solution for cold weather powertrain and hydraulic system needs



Cat® TDTO Cold Weather™


Recommended Transmission Temperature Ranges¹

°C	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°
°F	-40°	-22°	-4°	14°	32°	50°	68°	86°	104°

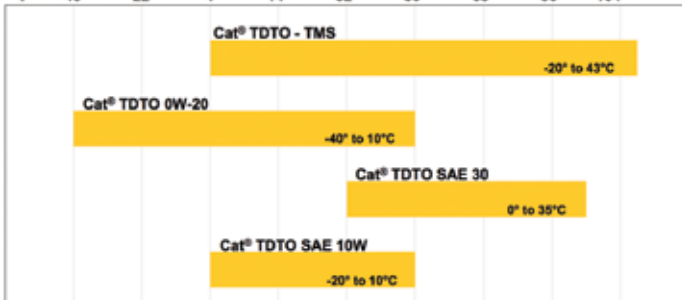

Recommended Hydraulic Temperature Ranges¹

°C	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°
°F	-40°	-22°	-4°	14°	32°	50°	68°	86°	104°

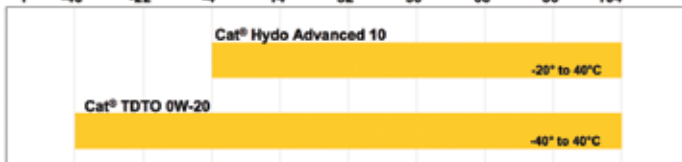

Typical Characteristics²

SEA Viscosity Grade	0W-20
Gravity @ 16° C (60° F)	
API (ASTM D287)	30.8
Specific	.872
Flash Point @ °C (ASTM D92)	190
Pour Point @ °C (ASTM D97)	-48
Kinematic Viscosity (ASTM D445)	
cSt @ 40°C	30.7
cSt @ 100°C	7.4
Brookfield Viscosity (ASTM D2983)	
cP @ -40°C	8000 max
Low Temperature Pumpability @ -30°C (ASTM D4684)	1500
Phosphorus, ppm	1070
Zinc, % wt.	0.104
Calcium, % wt.	0.310
Sulfated Ash, % wt.	1.25

¹ Contact your Cat dealer for applicable temperature ranges for your machine or reference SEBU6250.

² The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

Applications

Cat TDTO Cold Weather is the preferred transmission and drive train oil for low temperature operation in certain applications and can be used in wet brakes and hydraulics. Refer to SEBU6250 for more information.

Cat TDTO Cold Weather is also recommended for applications with the following original equipment manufacturer requirements:

- Caterpillar TO-4
- Allison C-4
- Vickers 35VQ25

Long Drain Intervals

With the use of Cat S•O•SSM Oil Analysis and Cat Filters, Cat TDTO Cold Weather is capable of long change intervals.

Health and Safety

For information on proper use for health, safety, and environment, please refer to the Material Safety Data Sheet (MSDS). Read and understand the MSDS before using this product. Always observe good hygiene measures. For a copy of the MSDS, contact us or visit the web at www.catmsds.com.

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.

We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts can help you maximize your equipment investment.

BUILT FOR IT.™

