


C7.1

MARINE AUXILIARY ENGINE (U.S. EPA Tier 3 / IMO II)

209 bkW (280 bhp) @ 2300 rpm

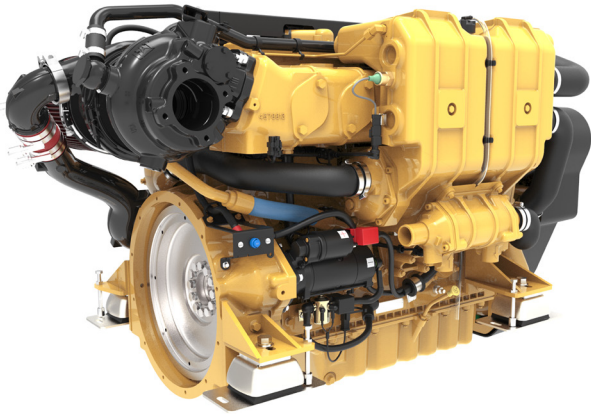

C7.1 Marine Auxiliary Engine (Commercial)
U.S. EPA Tier 3 / IMO II
Image may not reflect actual product.

ENGINE SPECIFICATIONS

Configuration

In-line 6, 4-stroke-cycle diesel

Emissions

U.S. EPA Tier 3 / IMO II emissions certified (commercial), RCD 2016 compliant, EU Stage IIIA compliant, CCNR Stage II through reciprocity with EU Stage IIIA

Rated Engine Speed

2300 rpm

Bore x Stroke

105 mm x 135 mm / 4.13 in x 5.31 in

Displacement

7.01 Liter
428 cu in

Aspiration

Turbocharged-aftercooled aspiration

Governor

Electronic (A5E2 V2 ECM)

Refill Capacity

Lube Oil System w/Oil filter change:
20 L (5.3 gal)

Oil Change Interval

500 hrs

Cooling

Heat exchanger or keel cooled

Flywheel Housing

SAE No. 03 with SAE
11.5 in flywheel

Rotation

Counterclockwise from flywheel end

FEATURES AND BENEFITS

- Superior response time and acceleration
- Common rail fuel system enables optimum combustion and low emissions
- Reduced combustion noise through advanced electronic control
- No visible smoke
- 12V or 24V electrical system
- Compatible with Cat® displays and electronics
- Closed crankcase ventilation system improves engine room cleanliness
- Gear driven jacket water pump and sea water pump for superior reliability
- Maintenance free valve train with hydraulic valve lash adjusters
- Self priming fuel system ensures a smooth start every time

STANDARD ENGINE EQUIPMENT

- Watercooled turbocharger and exhaust manifold
- Common rail fuel system
- Corrosion resistant sea water aftercooler
- Closed crankcase ventilation system
- Starter motors – 12V or 24V
- Fuel cooler
- Integral engine oil cooler
- Vibration damper and guard
- Electric fuel priming pump
- Self-tensioning multi-vee belt drive
- Gear driven jacket water pump
- Front and rear engine mounting brackets

OPTIONAL ATTACHMENTS

- SOLAS double wall high pressure fuel lines kit
- Engine mounted bilge pumps and auxiliary water pumps with electromagnetic clutch
- Engine mounted secondary alternator – 24V 100 amp or 12V 175 amp
- Tube and bundle jacket water heat exchanger and gear-driven sea water pump (rubber impeller)
- Transmission gear oil cooler (engine mounted)
- Additional engine and transmission sensor packages for on or off vessel monitoring
- Glow plugs
- Jacket water heater
- Various 6" water cooled exhaust elbow configurations
- Cabin heater (calorifier) connections
- Left-hand and right-hand oil dipsticks

AUXILIARY RATING DEFINITION

All Cat Marine Auxiliary engines and generator sets are rated for prime power for continuous electric service according to ISO 8528-1.

Hours per Year	Unlimited
Load Factor	≤ 70%
Overload Capacity	+ 10%
	maximum of 1 hour in 12
	maximum of 25 hours per year

BUILT FOR IT.™

CAT®

TECHNICAL DATA

C7.1 Marine Auxiliary Engine (U.S. EPA Tier 3 / IMO II)

FUEL CONSUMPTION - VARIABLE SPEED AUXILIARY (PRIME)

Brake Specific Fuel Consumption 209 bkW (280 bhp) @ 2300 rpm				
rpm	bkW	L/hr	bhp	Gal/hr
2300	209	56.3	280	14.9
2200	183	49.5	245	13.1
2000	137	37.8	184	10
1800	100	27.7	134	7.3
1600	70.4	19.2	94.4	5.1
1400	47.2	12.8	63.2	3.4
1200	29.7	8.2	39.8	2.2
1000	17.2	5.1	23	1.4
800	8.8	3	11.8	0.8
600	3.7	1.7	5	0.4

- ISO 3046/1 fluid consumption tolerance of -0/+5%

Note:

Consult your local Cat dealer to create a customized engine TCO (Total Cost of Ownership) analysis specific to your vessel.

Dealers (only): Please reference TMI Web for most current information.

DIMENSIONS & WEIGHT

	Length (1)	Height (2)	Width (3)	Engine dry weight
min.	1095 mm/43.1 in ¹	891 mm/35.1 in	798 mm/31.4 in ²	730 kg/1609 lb ³
max.			850 mm/33.5 in ³	760 kg/1676 lb ²

Note:

Do not use these dimensions for installation design. See general dimension drawings for detail.

¹ From rear face of flywheel housing to front of engine

² Heat Exchanger

³ Keel Cooled

