

# C2.2 Marine Generator Set



## ENGINE SPECIFICATIONS

<b>CONFIGURATION</b>	Inline 4, 4-Stroke Cycle diesel	<b>BORE x STROKE</b>	84 mm x 90 mm (3.31 in x 3.5 in)
<b>EMISSIONS</b>	U.S. EPA Tier 3	<b>REFILL CAPACITY</b>	Lube Oil System w/oil filter change: 10.6 L (2.8 gal)
<b>RATED ENGINE SPEED</b>	1,500 / 1,800 rpm	<b>OIL CHANGE INTERVAL</b>	500 hrs
<b>DISPLACEMENT</b>	2.2 L (135 cu in)	<b>ROTATION</b>	Counterclockwise
<b>ASPIRATION</b>	Naturally Aspirated / Turbocharged	<b>COOLING</b>	Hex or Single Circuit Keel
<b>GOVERNOR</b>	Electronic Isochronous		

## KEY FEATURES & BENEFITS

- This compact unit provides required power on demand, operating very efficiently with optimum performance.
- The 4 cylinder engine operates with little vibration and low sound levels.
- Available as an open set or with a sound enclosure, this package is ideal for power requirements in any application.
- Low operating and maintenance costs with excellent fuel economy.
- Single side servicing with extended service intervals makes maintenance easy.

## STANDARD EQUIPMENT

- Single element air cleaner
- Water-cooled exhaust manifold
- Single or Three phase brushless generator
- 12 or 24 volt electric starting motor
- 12 volt 55 amp alternator
- Single sided service points
- Anti-vibration mounts.
- Electronic automatic safety shutdowns

## OPTIONAL ATTACHMENTS

- Sound attenuated enclosure (Factory Fit or Upgrade Kit)
- Keel cooling kit
- Basic, Deluxe and remote panel options
- AC circuit breakers
- Flexible fuel lines
- Primary fuel filter/water separator
- Siphon break
- Exhaust system components
- Insulated electrical system




# RATINGS & FUEL CONSUMPTION

Three Phase ekW@0.8pf	Single Phase ekW@1.0pf	kVA	Hz	RPM	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
15		18.75	50	1500	1.37	248.8	NST	T3C	NST	NC
20		25.0	50	1500	1.88	242.8	NST	T3C	NST	NC
18		22.5	60	1800	1.63	242.9	NST	T3C	NST	NC
25		31.25	60	1800	2.24	241.0	NST	T3C	NST	NC
	15	15.0	50	1500	1.37	248.8	NST	T3C	NST	NC
	20	20.0	50	1500	1.88	242.8	NST	T3C	NST	NC
	18	18.0	60	1800	1.63	242.9	NST	T3C	NST	NC
	25	25.0	60	1800	2.24	241.0	NST	T3C	NST	NC

## ENGINE DIMENSIONS & WEIGHT

### GENERATOR SET

<b>LENGTH (1)</b>	47.9 in / 1,219 mm (open) 50.7 in / 1,290 mm (enclosed)
<b>WIDTH (2)</b>	22.3 in / 567 mm (open) 24.7 in / 628 mm (enclosed)
<b>HEIGHT (3)</b>	32.8 in / 835 mm (open) 31.0 in / 775 mm (enclosed)
<b>DRY WEIGHT</b>	857-1,027 lb / 386-466 kg

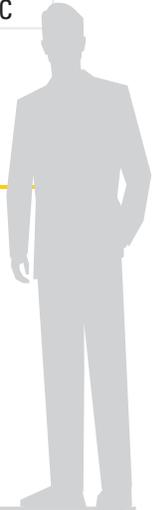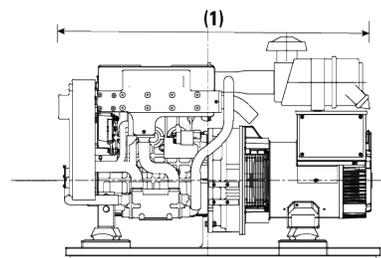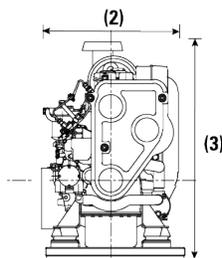

Contact your Local Cat® Dealer  
for more information!

LEHM21476-00

©2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

