

C32

MARINE GENERATOR SET

940 kW @ 1800 rpm, 60 Hz



Image shown for illustration purposes only and may not reflect actual product.

ENGINE SPECIFICATIONS

Configurations

Vee 12, 4-stroke-cycle diesel

Emissions

U.S. EPA Tier 4 Final certified
IMO III emissions certified
(SCR required)

Rated Engine Speed

1800 rpm

Bore x Stroke

145 mm x 162 mm / 5.71 in x 6.38 in

Displacement

32.1 Liter / 1959 cu in

Aspiration

Turbocharged-aftercooled
aspiration

Governor

Electronic (A5 ECM)

Refill Capacity

Lube Oil System w/ oil filter change:
146 L (38.5 gal)

Oil Change Interval

750 hrs

Cooling

Heat exchanger, keel or radiator cooled

Generator

SR5 - Form Wound

FEATURES AND BENEFITS

- Utilizes SCR Technology to enable U.S. EPA Tier 4 Final emission regulations compliance while lowering operational costs
- Utilizes closed loop air assisted DEF dosing control strategy that delivers:
 - Highest efficiency mixing and control to lower operational costs
 - Extends emissions useful life
 - Ensures compliance
 - Flexible to urea quality
- Enhanced control of fuel injection optimized through crank timing and the A5 ECM technology
- Industry leading power reserve
- Wide range of available Marine Society certifications
- Industry-leading warranty coverage for factory packaged components
- Global dealer network for service in any location

STANDARD ENGINE EQUIPMENT

- Separate circuit aftercooled (SCAC)
- Heat exchanger or Keel Cooling
- Watercooled exhaust manifold and turbocharger
- Right or left hand service sides
- Oil fill, simplex filter and dipstick
- Duplex fuel filters with hybrid fuel lines
- Closed crankcase fumes disposal
- Hard seawater lines – no flexible hoses
- Customer wiring and service tool connector
- Flanges for cooling connections, ANSI or DIN
- 24V control system
- IP23, air cooled, form wound SR5 generator offered in 440, 480 and 690V
- Helical spring/rubber Isolated mounting for vibration and structure borne noise reduction

OPTIONAL ATTACHMENTS

- Starting motors – air, electric or redundant
- Charging alternator
- Duplex oil filters
- MGCP III B control panel with Cat® Alarm and Protection System
- Manual or electric fuel priming pump
- Water-in-fuel and exhaust temperature sensors
- Fuel cooler
- SOLAS approved spray shielding
- IP44 generator protection

RATING DEFINITION AND CONDITIONS - PRIME POWER

Typical applications: For vessels operating with generator sets that provide power to the propulsion systems. All ratings are Prime Ratings according to ISO 8528-1 for unlimited usage per year at a load factor of $\leq 70\%$. 10% overload capability is required for a maximum of 1 hour out of every 12 and a maximum of 25 hours total per year.

Ratings are based on SAE J3046 and J1349 standard conditions of 100 kPa (29.61 in Hg) and 25°C (77°F). These ratings also apply at ISO8665, ISO3046-1:2002E, DIN6271-3, and BS5514 standard conditions of 100 kPa (29.61 in Hg), 27°C (81°F), and 60% relative humidity.

Fuel rates are based on fuel oil of 35° API [16°C (60°F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29°C (85°F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.).

Marine Auxiliary Engines are mainly used as generator set engines; however, they can be used for electrically driven pumps, winches, conveyors, thrusters, when it is specified. Engines can be radiator cooled or heat exchanger/keel cooled.

TECHNICAL DATA

C32 Marine Generator Set

CONSTANT SPEED FUEL & DEF CONSUMPTION - 1800 RPM, 60 HZ

% Power	Brake Specific Fuel Consumption					DEF Consumption 32.5 % Concentration		DEF Consumption 40 % Concentration	
	eKW	bhp	lb/bhp-hr	bkW	g/bkW-hr	Gal/hr	Liters/hr	Gal/hr	Liters/hr
100	940	1327	0.327	989	198.9	4.6	17.4	3.4	13.1
90	846	1193	0.327	890	199.0	4.0	15.2	3.0	11.5
80	752	1061	0.329	791	200.3	3.2	12.4	2.5	9.3
70	658	930	0.333	693	202.7	2.5	9.4	1.9	7.2
60	564	799	0.336	596	204.4	2.2	8.1	1.7	6.2
50	470	670	0.341	499	207.8	1.7	6.4	1.3	4.8
40	376	541	0.348	403	211.8	1.4	5.0	1.0	3.8
30	282	411	0.366	306	222.7	1.0	3.6	0.7	2.7


- ISO 3046/1 fluid consumption tolerance of -0/+5%
- Reference 32.5% DEF density of 1.0895 kg/L
- Reference 40% DEF density of 1.1120 kg/L

- Consult your local Cat® dealer to create a customized engine TCO (Total Cost of Ownership) analysis specific to your vessel.
- For Cat® dealers: Please reference TMI Web for most current information.

DIMENSIONS & WEIGHT

	Length (1)	Height (2)	Width (3)	Engine dry weight
min.	167.2 in/4245 mm	70.4 in/1747 mm	59.9 in/1521 mm	15721 lb/7131 kg
max.	226.1 in/5742 mm	92.8 in/2356 mm	89.8 in/2280 mm	21998 lb/9978 kg

Note: Do not use these dimensions for installation design. See general dimension drawings for detail.

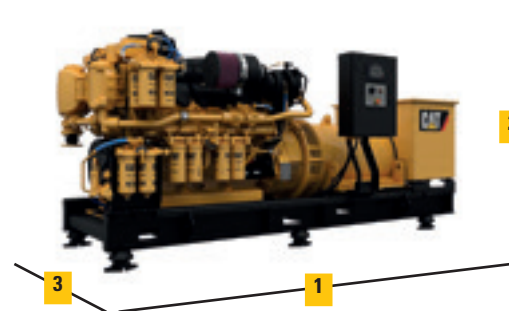

CLEAN EMISSIONS MODULE (CEM)

Dimensions & Weight				
Model	Length (1)	Height (2)	Width (3)	Weight ¹
6 Brick Z-Flow	147.7 in/3751 mm	23.5 in/597 mm	43.5 in/1106 mm	1246 lb/565 kg
6 Brick U-Flow	85.0 in/2159 mm	23.5 in/597 mm	56.9 in/1445 mm	1235 lb/560 kg
Dosing Cabinet	37.4 in/949 mm	22.8 in/579 mm	18.8 in/477 mm	209 lb/95 kg


¹ Weight with catalysts installed

The C32 engine requires Selective Catalyst Reduction (SCR) technology. The easy-to-install Cat® SCR System is an exhaust gas aftertreatment solution compliant with U.S. EPA Tier 4 Final / IMO III emission standards.

- Proven technology to meet U.S. EPA Tier 4 Final / IMO III emission standards
- Maintains engine efficiency, durability and reliability
- Easy to install with minimum impact to vessel design
- Compact package from one single source
- Available for new builds and retrofits
- For detailed dimensions and installation requirements, please refer to latest revision of A&I guide LEBM0023.

Clean Emissions Module (CEM)

Available in U-flow configurations (shown) and Z-flow configurations.

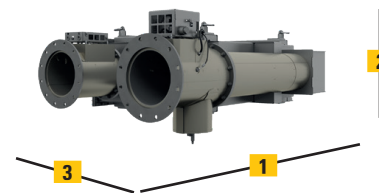

Dosing Cabinet



CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, „Caterpillar Yellow“, the „Power Edge“ and Cat “Modern Hex” trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

LEHM0293-02

To find your nearest dealer, please visit: www.cat.com/marine

©2019 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication.