



# Cat<sup>®</sup> CB2.5 GC, CB2.7 GC, CC2.7 GC

## Utility Compactors

*The Cat<sup>®</sup> GC 2-3 ton utility compactors are well suited for a variety of applications from asphalt work to base compaction and even landscaping. They are designed with industry leading features and performance to get the job done.*

### Simple to Operate

- Rocker switches and Cat<sup>®</sup> gauge cluster with water tank gauge to help make operation easy.
- Variable water spray system to extend time between water fills.
- Optional sliding operator seat and dual propel levers for reducing operator fatigue and better job surface visibility.

### Proven Productivity

- Large 720 mm (28 in) drum diameters for smooth mat finish.
- 14 mm (0.55 in) thick drum shells for longer durability.
- Dual vibratory frequencies and ballast options to maximize compactive effort.
- C1.7T engine with 18.4 kW (24.7 hp) (gross).

### Technology Ready

- ProductLink<sup>™</sup> for remote monitoring of machine location and status.
- Optional Compaction Measurement Value (CMV) displayed to the operator for improved compaction performance and consistency.

### Superior Safety

- High visibility 75 mm (3 in) orange seatbelt to make job site safety visible.
- Seat with operator presense sensor to prevent unintended operation while out of the seat.
- Slip resistant steps and platform for improved operator safety.
- Optional rotating amber beacon.

### Easy to Service

- Cat controls with ET capability for easy troubleshooting.
- Reduced maintenance tasks for quick servicing.
- 500 hour oil change interval to reduce maintenance time and costs.
- External fuel fill for easy access.
- LED lighting for durable and reliable performance.
- Uptime kits and customer value agreements available to ensure maximum uptime.



# Cat® CB2.5 GC, CB2.7 GC, CC2.7 GC Utility Compactors

Utility Compactor Application Guide											
			0 - 1.8 Tons		1.8 - 3 Tons				3 - 5 Tons		
	Application	Layer Thickness mm (in)	CB1.7	CB1.8	CB2.5 CB2.5 GC	CB2.7 CB2.7 GC	CC2.7 CC2.7 GC	CB2.9	CB4.0	CB4.4	CC4.0
			900 mm (35 in)	1000 mm (39 in)	1000 mm (39 in)	1200 mm (47 in)	1200 mm (47 in)	1300 mm (51 in)	1300 mm (51 in)	1400 mm (55 in)	1300 mm (51 in)
Asphalt	Walking Paths, Driveways, Patchwork	25 - 50 (1 - 2)	Best	Best	Better	Better	Better	Good	Good	Good	Good
		50 - 100 (2 - 3)	Best	Best	Better	Better	Better	Good	Good	Good	Good
	Parking Lots, Urban Streets	25 - 50 (1 - 2)	Better	Best	Best	Best	Best	Best	Better	Better	Better
		50 - 100 (2 - 3)	Better	Better	Best	Best	Best	Best	Better	Better	Best
	Roads, Highways	25 - 50 (1 - 2)	Good	Good	Better	Better	Better	Best	Best	Best	Best
		50 - 100 (2 - 3)	Good	Good	Better	Better	Better	Better	Best	Best	Best
Soil	Landscaping	< 100 (4)	Best	Best	Better	Better	Better	Good	Good	Good	Good
	Small Job Sites	< 100 (4)	Good	Good	Best	Best	Best	Better	Better	Better	Better
	Medium Job Sites	< 100 (4)	Good	Good	Better	Better	Better	Best	Best	Best	Best

# Cat® CB2.5 GC, CB2.7 GC, CC2.7 GC Utility Compactors

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>OPERATOR ENVIRONMENT</b>			<b>POWERTRAIN</b>		
Adjustable Suspension Seat with Operator Presense Switch	✓		Auto Engine Off and Auto Warmup	✓	
ROPS Folding	✓		Air Cleaner, Dual Element	✓	
ROPS Fixed		✓	Engine Belt Guard	✓	
Seat Belt – 75 mm (3 in) high visibility orange	✓		Traction Control (CB2.5 GC, CB2.7 GC)		✓
Operator Console w/ Water Tank Gauge, Emergency Stop, and Glove Box	✓		Fuel Filter, Water Separator, Priming Pump, Water Indicator	✓	
12-volt Power Outlet	✓		On-demand Hydraulic Cooling System	✓	
Horn, Backup Alarm	✓		<b>TECHNOLOGY</b>		
Sun Canopy		✓	Telematics – ProductLink™	✓	
Seat – Side Shift		✓	Remote Flash / Troubleshoot		✓
Dual Propel Levers		✓	CMV - Compaction Measurement Value		✓
<b>COMPACTION SYSTEM</b>			<b>ELECTRICAL</b>		
Folding Scrapers		✓	LED Working Lights	✓	
Fixed Scrapers	✓		Battery Disconnect		✓
Vibe Selection – Front, Rear, or both	✓		LED Rooding Lights		✓
Pressurized, Triple-Filtration Spray System with Test Mode	✓		Rotating Amber Beacon		✓
Cocoa Mats		✓	<b>OTHER</b>		
Edge Cutter Ready		✓	Vandal Protection – lockable hood, fuel fill, and controls cover	✓	
Water Sprayer Antifreeze Kit		✓	Biodegradeable Hydraulic Oil		✓
Ballast Kit – 200 kg (440 lb) (CB2.5 GC, CB2.7 GC)		✓	Bumpers		✓
Ballast Kit – 400 kg (880 lb) (CB2.5 GC, CB2.7 GC)		✓	Machine Life and Tiedowns	✓	
Ballast Kit – 100 kg (220 lb) (CC2.7 GC only)		✓	Offsets Hitch	✓	
			Single Point Lift		✓
			Custom Paint		✓

# Cat® CB2.5 GC, CB2.7 GC, CC2.7 GC Utility Compactors

## Technical Specifications

### Engine - Powertrain

Engine Model	Cat® C1.7T	
Emissions <sup>1</sup>	Brazil MAR-1, equivalent to U.S. EPA Tier 4 Final and EU Stage V	
Number of Cylinders	3	
Rated Speed	2200 rpm	
Engine Power ISO 14396:2002	18.4 kW	24.7 hp
Net Power ISO 9249:2007	18.2 kW	24.4 hp
Exhaust gas aftertreatment type	Muffler	

<sup>1</sup> Does not require ultra low sulfur diesel fuel to be compliant.

### Machine Performance

<b>Maximum Machine Speed</b>		
CB2.5 GC, CB2.7 GC	9.4 km/hr	5.8 mph
CC2.7 GC	8.6 km/hr	5.3 mph
<b>Theoretical Gradeability (no vibs)<sup>2</sup></b>		
CB2.5 GC	44%	
CB2.7 GC	41%	
CC2.7 GC	50%	

Actual gradeability may vary based on site conditions and machine configuration. Refer to the Operation and Maintenance Manual for more information.

### Vibratory System Specifications

<b>Frequency</b>		
High	62 Hz	3720 vpm
Low	50 Hz	3000 vpm
<b>Amplitude</b>		
CB2.5 GC	0.51 mm	0.020 in
CB2.7 GC	0.52 mm	0.020 in
CC2.7 GC	0.52 mm	0.020 in
<b>Maximum Centrifugal Force</b>		
CB2.5 GC	26.2 kN	5885.3 lbf
CB2.7 GC	31.0 kN	6968.8 lbf
CC2.7 GC	31.0 kN	6968.8 lbf

### Machine Weights<sup>2</sup>

<b>Standard Machine Operating Weight with ROPS</b>		
CB2.5 GC	2521 kg	5546 lb
CB2.7 GC	2698 kg	5936 lb
CC2.7 GC	2599 kg	5718 lb
<b>Maximum Machine Weight<sup>3</sup></b>		
CB2.5 GC	3021 kg	6646 lb
CB2.7 GC	3198 kg	7036 lb
CC2.7 GC	2779 kg	6114 lb
<b>Operating Weight (Front)</b>		
CB2.5 GC	1185 kg	2607 lb
CB2.7 GC	1301 kg	2861 lb
CC2.7 GC	1310 kg	2882 lb
<b>Operating Weight (Rear)</b>		
CB2.5 GC	1336 kg	2939 lb
CB2.7 GC	1398 kg	3075 lb
CC2.7 GC	1289 kg	2836 lb
<b>Weight per Tire – Operating Weight</b>		
CC2.7 GC	322 kg	709 lb
<b>Static Linear Load – Operating Weight (Front)</b>		
CB2.5 GC	11.85 kg/cm	66.2 lb/in
CB2.7 GC	10.84 kg/cm	60.7 lb/in
CC2.7 GC	10.91 kg/cm	61.1 lb/in
<b>Static Linear Load – Operating Weight (Rear)</b>		
CB2.5 GC	13.36 kg/cm	74.7 lb/in
CB2.7 GC	11.65 kg/cm	65.1 lb/in

<sup>2</sup> Operating Weights include coolant, lubricants, full fuel tank, 50% water, and 80 kg (176 lb) operator.

<sup>3</sup> Maximum Machine Weight includes all options, heaviest ballast configuration, full fluids, and 80 kg (176 lb) operator.

# Cat® CB2.5 GC, CB2.7 GC, CC2.7 GC Utility Compactors

## Technical Specifications

### Electrical

System Voltage	12 v
Battery Capacity	750 CCA
Alternator	85 Amp

### Dimensions


<b>1</b> Overall Length*	2596 mm	102.2 in
<b>2</b> Overall Width		
CB2.5 GC	1112 mm	43.8 in
CB2.7 GC	1312 mm	51.7 in
CC2.7 GC	1312 mm	51.7 in
<b>3</b> Drum Width		
CB2.5 GC	1000 mm	39.4 in
CB2.7 GC	1200 mm	47.2 in
CC2.7 GC	1200 mm	47.2 in
Drum Shell Thickness	14 mm	0.6 in
Drum Diameter	720 mm	28.3 in
Drum Offset	50 mm	2.0 in
<b>4</b> Overall Height		
with ROPS**	2595 mm	102.2 in
with ROPS and Canopy**	2709 mm	106.7 in
<b>5</b> Transport Height with foldable ROPS	1799 mm	70.8 in
<b>6</b> Wheelbase	1800 mm	70.9 in
<b>7</b> Curb Clearance	453 mm	17.8 in
<b>8</b> Ground Clearance	285 mm	11.2 in
Inside Turning Radius		
CB2.5 GC	2640 mm	103.9 in
CB2.7 GC	2540 mm	100.0 in
CC2.7 GC	2540 mm	100.0 in
Outside Turning Radius		
CB2.5 GC	3640 mm	143.3 in
CB2.7 GC	3740 mm	147.2 in
CC2.7 GC	3740 mm	147.2 in

### Miscellaneous

Articulation Angle	32°
Oscillation Angle	6°
Number of Tires (CC2.7 GC)	4

### Service Refill Capacities

Fuel Tank (total capacity)	55 L	14.37 gal
Water Spray Tank (total capacity)		
CB2.5 GC, CB2.7 GC	200 L	52.80 gal
CC2.7 GC	160 L	42.24 gal
Emulsion Tank (total capacity) (CC2.7 GC)	26 L	6.86 gal
Cooling System	7.9 L	2.09 gal
Engine Oil with Filter	6.0 L	1.58 gal
Hydraulic Tank (service refill)	21 L	5.54 gal

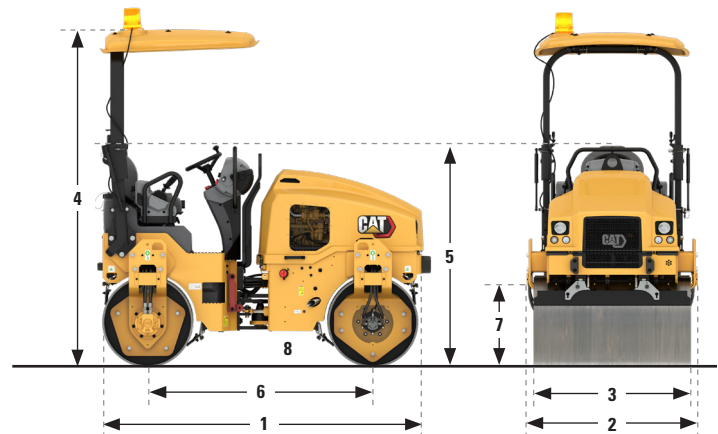

\*Bumper option adds 95 mm (3.7 in)

\*\*Beacon option adds 175 mm (6.8 in)

# Cat® CB2.5 GC, CB2.7 GC, CC2.7 GC Utility Compactors

## Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit [www.caterpillar.com/en/company/sustainability.html](http://www.caterpillar.com/en/company/sustainability.html).

## ENGINE

- The Cat® C1.7 is available in configurations that meet U.S. EPA Tier 4 Final and EU Stage V emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
  - ✓ 20% biodiesel FAME (fatty acid methyl ester)\*
  - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

*\*Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

## PAINT

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
  - Barium < 0.01%
  - Cadmium < 0.01%
  - Chromium < 0.01%
  - Lead < 0.01%

## SOUND PERFORMANCE

With cooling fan speed at 70% of maximum value:

Operator Sound Pressure Level (ISO 6396:2008) – 88 dB(A)

Exterior Sound Power Level (ISO 6395:2008) – 104 dB(A)

- Hearing protection may be needed when operating with an open operator station for extended periods or in a noisy environment.

## OILS AND FLUIDS

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat BIO HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

## FEATURES AND TECHNOLOGY

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
  - Advanced hydraulic system balances power and efficiency
  - Hydraulic on-demand fan changes speed with temperature
  - Extended maintenance intervals reduce fluid and filter consumption
  - Auto idle shutdown reduces unproductive hours and fuel burned

## RECYCLING

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage		
	CB2.5 GC	CB2.7 GC	CC2.7 GC
Steel	69.59%	71.73%	66.65%
Iron	12.96%	12.05%	12.44%
Mixed Metal	5.24%	4.87%	5.03%
Fluid	3.31%	3.08%	3.18%
Nonferrous Metal	3.00%	2.79%	2.88%
Plastic	1.71%	1.59%	1.64%
Rubber	1.56%	1.45%	5.66%
Other	1.34%	1.25%	1.29%
Uncategorized	1.24%	1.15%	1.19%
Mixed Nonmetallic	0.03%	0.03%	0.03%
Mixed-Metal and Nonmetal	0.01%	0.01%	0.01%
Total	100%	100%	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 96%

**Cat® CB2.5 GC, CB2.7 GC, CC2.7 GC Utility Compactors**

---

# Cat® CB2.5 GC, CB2.7 GC, CC2.7 GC Utility Compactors

---



For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2023 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment.  
See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

QEHQ2818-05 (09-2023)  
Build Number 03A  
(MAR-1, Tier 4 Final, EU Stage V)

