


Hydraulic Choke

Provides maximum service, minimum maintenance

SPM™ Oil & Gas

A Caterpillar Company

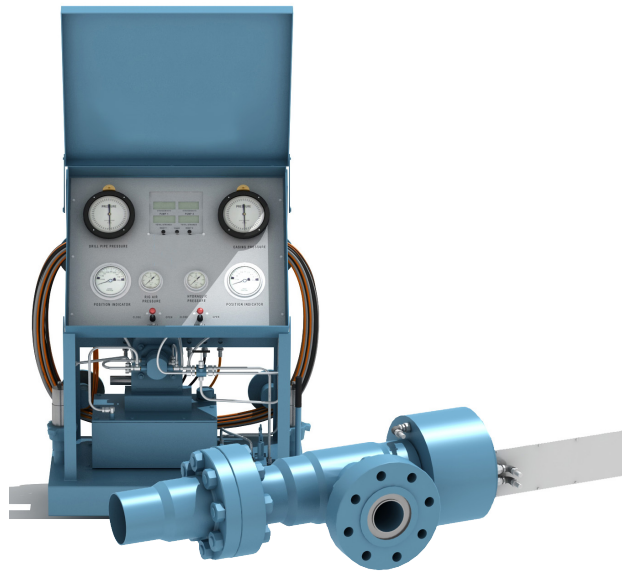

Performance Features

- Pressure-balanced choke plug enables smooth opening and locking action
- Easy, hassle-free maintenance with interchangeable parts
- Quick and easy inspection and replacement of trim while choke is in-line
- Excellent wear resistance with satellite nose overlay
- Withstands operating temperatures from minus 50°F (10°C) to more than 350°F (176°C)
- Digital gauge option
- Multiple configuration options: single or dual remote panel in a 10,000 psi or a 15,000 psi kit

Hydraulic Choke Panel Specifications

Dimensions (L x W x H)	2' x 3' x 4'
Weight	500 lbs
Configuration options	Single remote panel, dual remote panel 10,000 psi gauges, 15,000 psi gauges
Operational power	Hydraulic or manual

Hydraulic Choke–10,000 psi Specifications

Dimensions (L x W x H)	3'1" x 1'4" x 1'
Weight	300 lbs
Configuration	3 1/16 inch, 10,000 psi

Hydraulic Choke–15,000 psi Specifications

Dimensions (L x W x H)	3'1" x 1'4" x 1'
Weight	330 lbs
Configuration	3 1/16 inch, 15,000 psi

SPM Oil & Gas

3900 S Hwy 81
El Reno, OK 73036
USA

T +1 405 442 8022

www.spmoilandgas.com