

1204EA-E44TA/TTA

Industrial Engine

China Nonroad Stage IV

110-129.4 kW (147.5-173.5 hp)

The Perkins® 1200 Series, 4 cylinder option gives you a complete power solution that meets the latest China Nonroad Stage IV emission standards. The choice of options, engine configurations and robust technology allows you to integrate the 1204 range into your equipment with minimum re-engineering. The innovative, compact and flexible design of the 1200 Series means it can be found in more than 800 different models of equipment.



Features and benefits

Performance

High power density, combined with excellent torque in the 1204 range allows you to select a more compact engine where previously you might have used an engine of a higher cubic capacity.

Installation and package

Many service items have a choice of location on either side of the engine to enable maximum service access.

Tailored for your machines

Working closely with OEMs, we have developed a wide range of variables so that the 1204 range can easily fit into your machine. The 1200 Series benefits from our engineering experience and heritage. Its improved productivity and fuel consumption reduces the total cost of ownership.

Specification		
Cylinders	4	
Displacement, litres (in ³)	4.4 (268.5)	
Aspiration	Turbocharged aftercooled	Twin turbocharged aftercooled
Bore and stroke, mm (in)	105 x 127 (4.1 x 5.0)	
Maximum power, kW (hp)	110	129.4
Rated speed, rpm	2000	2200
Maximum torque, Nm (lb ft) @ rpm	560 (413) @ 1400	750 (553) @ 1400
Combustion system	Direct injection	
Weight, kg (lb)	488 (1075)	535 (1179)
Rotation (viewed from flywheel)	Counterclockwise	

For more information please contact a Perkins distributor: <http://distributorlocator.perkins.com>

All information in this document is substantially correct at time of printing and may be altered subsequently.
Photographs are for illustrative purposes only and may not reflect final specification.
Final weight and dimensions will depend on completed specification.
Information subject to selected configuration, and subject to change without notice
Engine power measured per ISO 14396:2002
PN3263/08/21 Produced in England ©2021 Perkins Engines Company Limited

 **Perkins®**





THE HEART OF EVERY GREAT MACHINE

1204EA-E44TA/TTA

Industrial Engine

China Nonroad Stage IV

110-129.4 kW (147.5-173.5 hp)

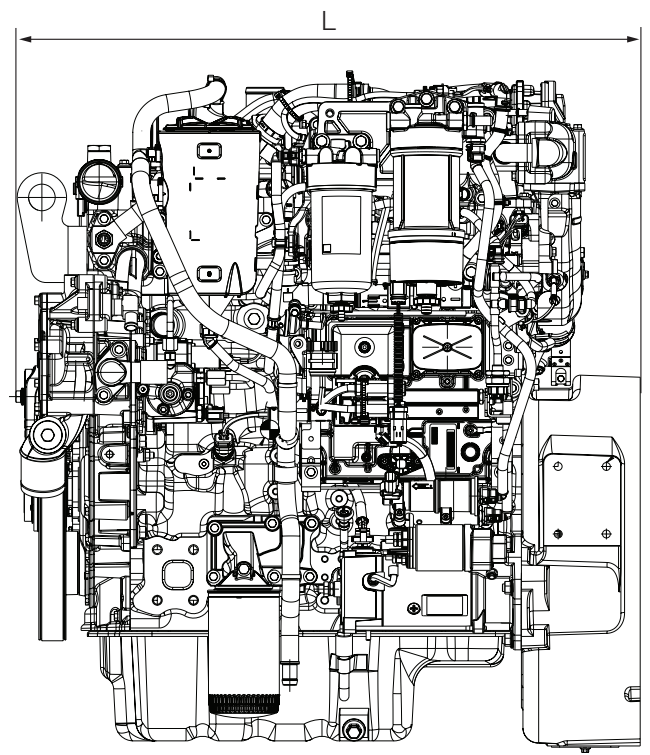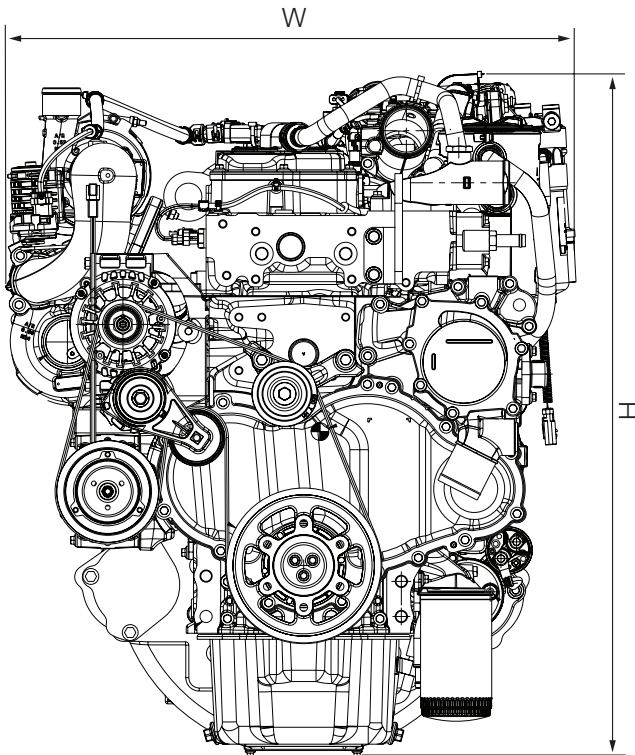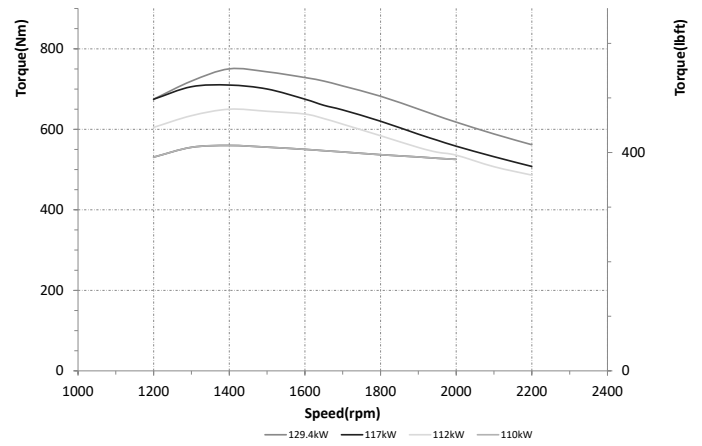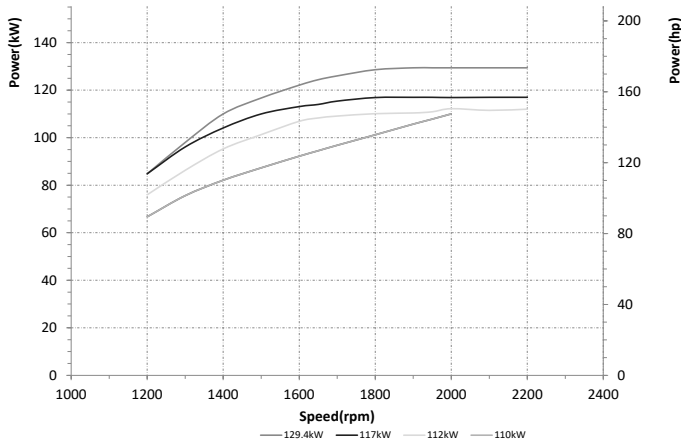

The above dimensional drawings are based on the twin turbocharged aftercooled model

	Turbocharged aftercooled	Twin turbocharged aftercooled
Length (including fan), mm (in)	630 (24.8)	630 (24.8)
Width, mm (in)	660 (26)	748 (29.4)
Height, mm (in)	897 (35.3)	897 (35.3)
Weight, kg (lb)	488 (1075)	535 (1179)

For more information please contact a Perkins distributor: <http://distributorlocator.perkins.com>

All information in this document is substantially correct at time of printing and may be altered subsequently.
 Photographs are for illustrative purposes only and may not reflect final specification.
 Final weight and dimensions will depend on completed specification.
 Information subject to selected configuration, and subject to change without notice.
 Engine power measured per ISO 14396:2002
 PN3263/08/21 Produced in England ©2021 Perkins Engines Company Limited



THE HEART OF EVERY GREAT MACHINE