



Cat[®] D1 SSLGP

DOZER

FEATURES:

This Cat[®] D1 SSLGP (Super Super Low Ground Pressure) specialty configuration of the D1 provides super low ground pressure to avoid disturbance to the field. The increased undercarriage width and ground contact length are significantly extended when compared to the standard LGP (Low Ground Pressure) specification. The D1 SSLGP delivers superior performance and the broadest choice of technology features to help you get the most from your dozer. Nimble and responsive, it has extremely low ground pressure, power for dozing and finesse for grading. Fully hydrostatic transmission gives you seamless acceleration, so you can get the job done quickly. The load sensing system automatically optimizes ground speed based on load, for the greatest productivity and fuel efficiency.

IMPROVED VISIBILITY

- Sloped hood provides better visibility to the work in front of the blade as well as the overall job site. Better visibility can equal less operator fatigue and more confidence in your work.

ENHANCED TECHNOLOGY

Cat small dozers include a suite of technology features that work seamlessly to save time, effort, fuel, machine wear and overall cost.

- **Stable Blade Lift and Tilt** automatically works behind the scenes to allow operators to create smooth surfaces with less effort using accelerometers on the blade and chassis with an advanced algorithm to make minor blade raise and lower movements.
- **Blade Load Monitor** provides real-time feedback of current load vs. target load to fully utilize machine capacity benefiting operators of all skills levels. Automatically compensates for ground conditions. This feature is not available indoors or in areas where a GPS signal is not available.
- **Low Slip Traction Control** prevents excessive track slip to improve machine efficiency and reduce burden on the operator. Feature offers two modes: Normal Mode helps when pushing heavy blade loads by limiting non-productive track slip, recommended for most applications. And Low Slip Mode limits track slip for applications sensitive to slip such as spreading material on top of a liner, select this mode when needed.
- **AutoCarry™** raises and lowers the blade to maximize pushing capability and prevent excessive track slip when pushing heavy loads. Feature is designed to work in unison with other Operator Assist Features. Not available indoors or in areas where a GPS signal is not available.

- **Scalable 2D and 3D Cat Grade** is an optional feature that makes your job up to 39% faster with up to 82% fewer operator inputs and less rework by maintaining blade angles for better surface quality – even with less experienced operators.
- **Cat Command** remote control is an optional feature that takes you off the machine and away from hazardous conditions, dust, noise or vibration or operating on unstable surfaces. Eliminates risk of injury from climbing on or off the machine. Integrated with dozer systems, Cat Command enables smooth, precise control with access to all machine functions and advanced features (if equipped) for maximum efficiency and productivity.

UP TO 10% IMPROVED FUEL ECONOMY

- The D1 SSLGP features the lowest fuel consumption in this size class with the same great performance you've come to expect. Up to 20% improvement and no performance sacrifice when ECO mode is active.

COMFORTABLE WORK SPACE

- The spacious and comfortable cab features an optional heated and ventilated seat, along with heated joystick controls to make the operator comfortable no matter what the conditions are outside. The seat height and armrests can be easily adjusted to the operator's preference.

BIGGER, BETTER DISPLAY WITH CAMERA

- This new and improved optional 254 mm (10 in) touchscreen, color display is easy to use, with a great view of machine settings, rearview camera and Slope Indicate/Slope Assist screens. The large reversing camera gives the operator better visibility to the job site.

DURABLE UNDERCARRIAGE

- The D1 SSLGP is available with a Sealed and Lubricated Track (SALT) to best suit your application. The undercarriage has a longer life resulting in less down time. A one piece mainframe/track roller frame design and the large, double reduction planetary final drive allow the machine to push heavy loads. It also features optional self-cleaning shoes to avoid packing while operating the machine and improve flotation.



D1 SSLGP Dozer

Specifications

Engine

Engine Model	Cat C3.6	
Net Power @ 2,200 rpm		
SAE J1349	59.7 kW	80 hp
ISO 9249/EEC 80/1269	59.7 kW	80 hp
Power Train	Hydrostatic	
Displacement	3.6 L	220 in ³

- Net power is tested per ISO 9249:2007 and SAE J1349:2011 and as advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- All non-road U.S. EPA Tier 4 Final, EU Stage V, Japan 2014 (Tier 4 Final) and Korea Tier 4 Final diesel engines are required to use only Ultra Low Sulfur Diesel (ULSD) fuels containing 15 ppm EPA/10 ppm EU (mg/kg) sulfur or less.

Weights

Operating Weight	9572 kg	21,103 lb
------------------	---------	-----------

- Specifications shown are for machine equipped with dozer blade, Enclosed Roll Over Protective Structure (EROPS) cab, back-up alarm, operator, coolant, lubricants and full fuel tank.
- For machine with ripper, add 554 kg (1,222 lb).

Cab

Rollover Protective Structure (ROPS)	ISO 3471:2008
Falling Object Protective Structure (FOPS)	ISO 3449:2005 Level II

Transmission

Drive Pumps	1	
Track Motors	2	
Relief Valve Settings	48 500 kPa	7,033 psi
Maximum Travel Speed – Forward	9 km/h	5.6 mph
Maximum Travel Speed – Reverse	10 km/h	6.2 mph

Undercarriage


Number of Rollers (each side)	8	
Number of Shoes (each side) – Sealed and Lubricated Track (SALT) Undercarriage	52	
Shoe Width	990 mm	39 in
Length of Track on Ground	2940 mm	115.7 in
Track Gauge	2080 mm	81.9 in
Ground Pressure	16 kPa	2.32 psi

Service Refill Capacities

Fuel Tank	195 L	51.5 gal
Crankcase and Filter	10.5 L	2.8 gal
Final Drives, (each side)	10 L	2.6 gal
Final Drives, LGP (each side)	10 L	2.6 gal
Cooling System	19 L	4.2 gal
Transmission/Hydraulic Tank	90 L	23.8 gal
Diesel Exhaust Fluid (DEF) Tank	19 L	4.9 gal

Hydraulic Controls

Pump Output	65 L/min	17.2 gal/min
Relief Valve Settings	20 600 kPa	2,988 psi

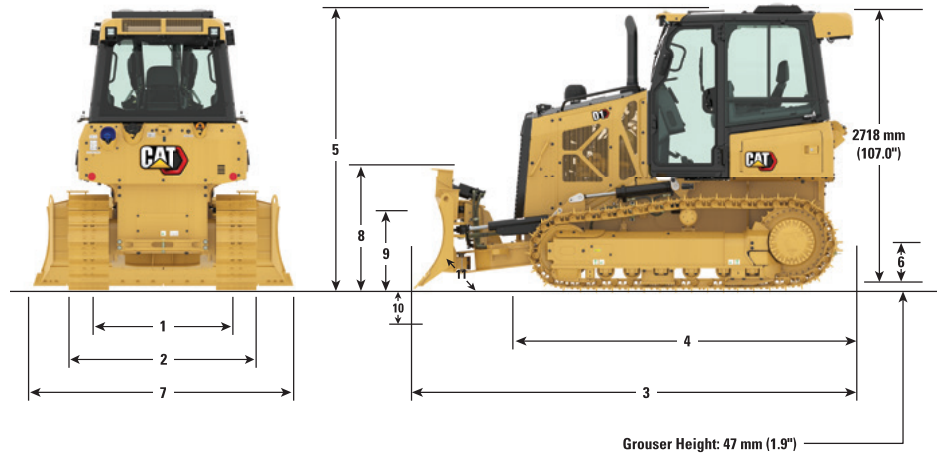

Dimensions*

	SSLGP	
1 Track Gauge	2080 mm	81.9 in
2 Width of Dozer (standard shoes, no blade)	3070 mm	120.9 in
3 Overall Length (with blade)	4650 mm	183.1 in
4 Length of Basic Dozer (without blade)	4250 mm	167.3 in
5 Dozer Height	2790 mm	109.8 in
6 Ground Clearance	405 mm	15.9 in
BLADE	SSLGP	
7 Blade Width	3470 mm	136.6 in
8 Blade Height	695 mm	27.4 in
9 Blade Lift Height	1025 mm	40.4 in
10 Digging Depth	399 mm	15.4 in
11 Blade Cutting Edge Angle	53°	
Maximum Tilt	480 mm	18.9 in
Maximum Angle (either side)	N/A	
Blade Width at Maximum Angle	N/A	N/A
Blade Capacity (SAE)	1.2 m ³	1.57 yd ³

*Abrasion Undercarriage

D1 SSLGP Dozer

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWER TRAIN			HYDRAULIC		
Air cleaner with precleaner, automatic dust ejection and underhood intake	✓		Hydraulic pump and oil	✓	
Air cleaner with external precleaner		✓	Four valve for use with ripper		✓
Aluminum bar plate cooling system (radiator, power train)	✓		Four valve for use with winch		✓
Automatic traction control	✓		Single lever, three function control	✓	
Cat C3.6 diesel engine	✓		Three valve hydraulics	✓	
Drive, auxiliary	✓		CAT TECHNOLOGY		
Dual path, closed loop, hydrostatic transmission	✓		Low Slip Traction Control	✓	
Electric fuel pump	✓		Slope Indicate	✓	
Fuel/water separator	✓		Stable Blade Lift and Tilt	✓	
Turbocharged aftercooled	✓		Cat Grade with Slope Assist		✓
ELECTRICAL			Cat Grade with 3D		✓
Alarm, backup	✓		Blade Load Monitor (included with Cat Grade with 3D)		✓
Alternator, 150 amp, heavy duty	✓		AutoCarry (included with Cat Grade with 3D)		✓
Batteries, heavy duty, maintenance free, 1,000 CCA	✓		3rd Party Grade Compatibility	✓	
Diagnostic connector	✓		Cat Product Link™ PLE643/PLE743 Cellular	✓	
Four integrated front halogen lights, two rear halogen	✓		Cat Product Link PLE683/PLE783 Cellular/Satellite		✓
Four integrated front LED lights, two rear LED		✓	Full-color 254 mm (10 in) touchscreen grade display		✓
Horn, electric	✓		Cat Command		✓
Starter, electric, 12 V, heavy duty	✓		ATTACHMENTS		
UNDERCARRIAGE			Rigid drawbar	✓	
SALT undercarriage (52 section)	✓		Drawbar, towing		✓
Track Pairs			Front pull device	✓	
– Track, 990 mm (39 in)		✓	Machine security system		✓
Carrier rollers	✓				
Guards, front/rear guiding	✓				
Eight roller track frame	✓				
Track adjusters, hydraulic	✓				
Track rollers, lifetime lubricated	✓				

(continued on next page)

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
OPERATOR ENVIRONMENT		
Armrests, adjustable	✓	
Cab, with air conditioning		✓
Cab, polycarbonate windows and air conditioning		✓
Coat hook	✓	
Controls, seat mounted, fore/aft adjustment	✓	
Cup holders	✓	
ECO Mode	✓	
Electronic Monitoring system with gauge:		
– Chassis slope indication	✓	
– DEF	✓	
– Engine coolant temperature	✓	
– Fuel level	✓	
– Hydraulic oil temperature	✓	
Electronic security system	✓	
Engine air cleaner service indicator	✓	
Engine RPM and gear display	✓	
Floor mat, rubber, heavy duty	✓	
Foot pads, dash	✓	
Hour meter, electronic	✓	
Independent forward/reverse speed settings	✓	
Mirror, rearview, inside	✓	
Power port, 12 volt	✓	
Radio, AM/FM Bluetooth®		✓

	Standard	Optional
OPERATOR ENVIRONMENT <i>(continued)</i>		
ROPS/FOPS canopy	✓	
Seat, air suspended, cloth or vinyl	✓	
Seat, air suspension, choice of:		
– Vinyl, heated seat with heated controls		✓
– Cloth, heated seat with heated controls		✓
– Cloth, heated and ventilated seat with heated controls		✓
Seatbelt, hi-vis retractable 76 mm (3")	✓	
Seatbelt buckling indicator/reminder	✓	
Single pedal combining decel and brake functions	✓	
Sound suppression		✓
Speed recall	✓	
Storage compartment	✓	
Throttle switch, rotary	✓	
Travel speed limiter, electronic	✓	
OTHER		
Heater, engine, coolant 120 V/240 V		✓
Starting aid, ether		✓

D1 SSLGP Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C3.6 engine meets U.S. EPA Tier 4 Final and EU Stage V, and Japan 2014 emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.8 kg (4.0 lb) of refrigerant, which has a CO₂ equivalent of 2.574 metric tonnes (2.873 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

With cooling fan speed at 70% of the maximum value:

Guaranteed Exterior Sound Power
(2000/14/EC ISO 6395:2008) – 109 dB(A)

Dynamic Operator Sound Pressure Level
(ISO 6396:2008) – 76 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Eco mode minimizes fuel consumption for light applications
 - Save fuel with efficiency features such as engine idle shutdown
 - Extended maintenance intervals reduce fluid and filter consumption
 - Cut maintenance costs with extended maintenance intervals
 - Boost productivity up to 50% with Cat technologies like Cat Grade with Slope Assist and Cat Grade with 3D and Operator Assist Features Stable Blade Lift and Tilt, Blade Load Monitor, Low Slip Traction Control and AutoCarry.
 - Remote Flash and Remote Troubleshoot

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	81.19%
Iron	8.48%
Nonferrous Metal	3.29%
Uncategorized	1.87%
Fluid	1.52%
Other	1.36%
Mixed Metal	0.87%
Plastic	0.64%
Mixed-Metal and Nonmetal	0.60%
Rubber	0.18%
Mixed Nonmetallic	0%
Total	100.00%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714 (Earth-moving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following values in the table may vary.

Recyclability – 98%

The data provided above was based on the product configuration as provided by the individual product group.

D1 SSLGP Dozer

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2023 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ8390-02 (03-2023)
Replaces AEHQ8390-01
Build Number: 12A
(N Am, Aus-NZ, Japan)

