



# CP11 GC

## Vibratory Soil Compactor

# Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

## TABLE OF CONTENTS

### Specifications

Engine	2
Service Refill Capacities	2
Standards	2
Dimensions	3
Padfoot Specifications	3
Drive	4
Vibration System	4
Operation Specifications	5
<b>Standard and Optional Equipment</b>	<b>6</b>



# CP11 GC Vibratory Soil Compactor Specifications

## ENGINE

Engine Model	Cat® C3.6	
Gross Power - ISO 14396	90 kW	120.7 hp
Gross Power - SAE J1995	91.7 kW	123 hp
Net Power - ISO 9249	83.7 kW	112.2 hp
Net Power - SAE J1349	82.9 kW	111.2 hp
Displacement	3.6 L	219.7 in <sup>3</sup>
Stroke	120 mm	4.7 in
Bore	98 mm	3.9 in

- Cat C3.6 engine meets US EPA Tier 4 Final / EU Stage V emission standards.
- The power ratings apply at an engine speed of 2,000 rpm when tested under the conditions for the specified standard in effect at the time of manufacture. The stated speed is when tested under the reference conditions for the specified standards.
- Net power advertised is the power available at the engine flywheel when equipped with a fan at maximum speed, air cleaner, clean emissions module, and alternator with engine speed at 2,000 rpm.
- The gross power advertised is with the fan at maximum speed.

## SERVICE REFILL CAPACITIES

Fuel Tank (total capacity)	213 L	56.3 gal
Diesel Exhaust Fluid (DEF) refill capacity	19 L	5.0 gal
Cooling System	18.5 L	4.9 gal
Engine Oil w/ Filter	11.6 L	3.1 gal
Eccentric Weight Housings (combined)	26 L	6.9 gal
Axle and Final Drives	10 L	2.6 gal
Hydraulic Tank (service refill)	23 L	6.1 gal

## SOUND PERFORMANCE (declared)

ISO 6393:2008 (external)	107 dB(A)
ISO 6394:2008 (inside cab)	81 dB(A)

## SOUND PERFORMANCE (tested)

- The declared static operator sound pressure level is measured according to the static test procedures and conditions that are specified in ISO 6394 (interior) and ISO 6393 (exterior). The sound level may vary at different engine and/or cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.


## STANDARDS

Brakes	Brakes meet ISO 3450:2011 standards
Cab/ROPS	ROPS/FOPS meet ISO 3471:2008 and ISO 3449:2005 Level II standards

# CP11 GC Vibratory Soil Compactor Specifications

## DIMENSIONS

All dimensions are approximate

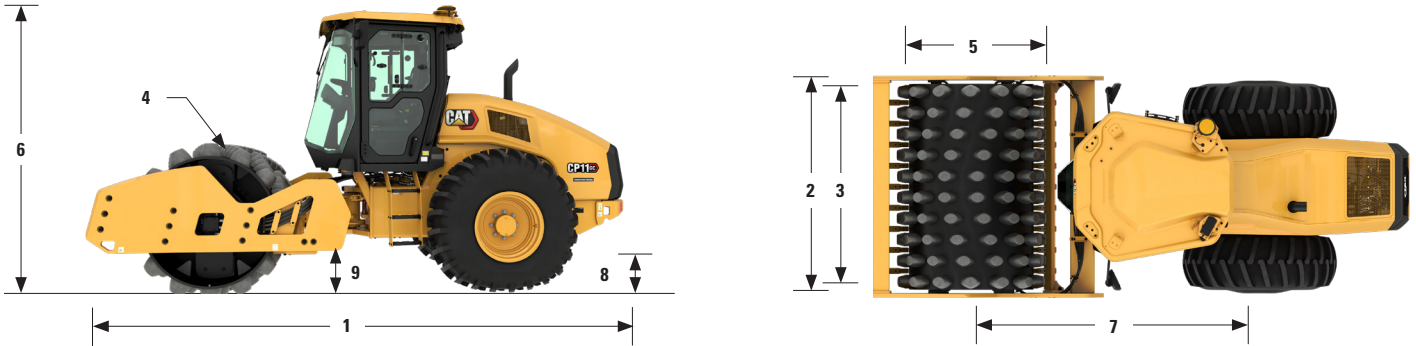

1 Overall Length	5.70 m	18.71 ft
2 Overall Width	2.30 m	7.53 ft
3 Drum Width	2134 mm	84 in
4 Drum Shell Thickness	25 mm	0.98 in
5 Drum Diameter	1535 mm	60.4 in
6 Overall Height		
Oval Faced Padfoot	3.0 m	9.8 ft
Square Faced Padfoot	3.0 m	9.8 ft
7 Wheelbase	3.0 m	9.8 ft
8 Ground Clearance		
Oval Faced Padfoot	516 mm	20.3 ft
Square Faced Padfoot	525 mm	20.7 ft
9 Curb Clearance		
Oval Faced Padfoot	496 mm	19.5 ft
Square Faced Padfoot	480 mm	18.9 ft
Inside Turning Radius	3.86 m	12.7 ft
Hitch Articulation Angle		34°
Hitch Oscillation Angle		15°

## PADFOOT SPECIFICATION

Number of Pads		140
Pad Height, oval pads	127 mm	5 in
Pad Face Area, oval pads	74.4 cm <sup>2</sup>	11.5 in <sup>2</sup>
Pad Height, square pads	100 mm	3.9 in
Pad Face Area, square pads	123.1 cm <sup>2</sup>	19.1 in <sup>2</sup>
Number of Chevrons		14

# CP11 GC Vibratory Soil Compactor Specifications

## DRIVE SYSTEM

Max. Travel Speed		
High Idle	11 km/h	6.84 mph
Eco-mode	9.4 km/h	5.84 mph
Max. Working Speed		
High Idle	5.6 km/h	3.5 mph
Eco-mode	5.0 km/h	3.1 mph
Rimpull	57 kN	12,814 lbf
Theoretical Gradeability, with or without vibration	55%	

- Maximum Travel speeds is measure with smooth drum and diamond tire configured.
- Actual gradeability may vary based on site conditions and machine configuration. Refer to the Operation and Maintenance Manual for more information.

## VIBRATION SYSTEM

Nominal Amplitude - High		
Standard Frequency	1.8 mm	0.071 in
Eco-mode Frequency	30 Hz	1800 vpm
Nominal Amplitude - Low		
Frequency	28.6 Hz	1716 vpm
Eco-mode Frequency	0.89 mm	0.035 in
Centrifugal Force		
Maximum	33 Hz	1980 vpm
Minimum	31.5 Hz	1890 vpm
Maximum	249 kN	55,932 lbf
Minimum	148 kN	33,249 lbf

# CP11 GC Vibratory Soil Compactor Specifications

OPERATION SPECIFICATION	ROPS/FOPS Canopy		ROPS/FOPS Cab	
	<b>Operating Weight - w/ Oval Padfoot</b>	<b>11 235 kg</b>	<b>24,769 lb</b>	<b>11 389 kg</b>
At Drum	6345 kg	13,988 lb	6388 kg	14,084 lb
French Classification, data/class				
High Amplitude	39.9	VM2	40.2	VM3
Low Amplitude	27.9	VM2	28.1	VM2
<b>Operating Weight - w/ Square Padfoot</b>	<b>11 267 kg</b>	<b>24,840 lb</b>	<b>11 421 kg</b>	<b>25,179 lb</b>
At Drum	6377 kg	14,059 lb	6420 kg	14,154 lb
French Classification, data/class				
High Amplitude	40.1	VM3	40.4	VM3
Low Amplitude	28.0	VM2	28.2	VM2

- All operating weights shown are based on standard configurations with full level fluids, 75 kg operator, smooth/shell kit drum w/ diamond tires, padded drum w/bar tread tires and cab w/ heat & A/C.
- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 2.2 kg of refrigerant, which has a CO2 equivalent of 3.146 metric tonnes.

# CP11 GC Vibratory Soil Compactor Specifications

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>OPERATOR ENVIRONMENT</b>			<b>POWER TRAIN</b>		
Sun Canopy with Platform Handrails/ Guardrails, Floor Mat	✓		Cat C3.6 Diesel Engine, 4 cylinder	✓	
Vinyl Adjustable Seat, Seat Belt	✓		Single Propel Pump	✓	
Adjustable Tilting Steering Column	✓		Dual Fuel Filter, Water Separator, Priming Pump, Water Indicator	✓	
12-volt Power Outlet	✓		Radiator/Hydraulic Oil Cooler, Charge Air Cooler	✓	
Horn, Backup Alarm	✓		Dual Braking System	✓	
Internal Rear View Mirror	✓		Two-speed Hydrostatic Transmission	✓	
Rear View Camera with Color Touchscreen Display (Cab)		✓	Transmission Guard		✓
Sun/Debris Shields (Canopy)		✓	<b>TECHNOLOGY SOLUTIONS</b>		
Cab Internal Roll-down Sun Screen (Cab)		✓	Measure - Machine Drive Power and/or CMV		✓
Sound Reduction Kit		✓	Map - SBAS GNSS Mapping		✓
Sun Visor (Cab)		✓	Connect - Machine-to-Machine Communication		✓
Deluxe High-back Air-ride Seat (Cab)		✓	<b>ELECTRICAL</b>		
<b>VIBRATORY SYSTEM</b>			12 volt Electrical System	✓	
Padfoot Drum	✓		120 ampere Alternator	✓	
Dual Amplitude, Dual Frequency	✓		900 Cold-cranking Amps Battery Capacity	✓	
Pod-Style Eccentric Weight Housings	✓		<b>OTHER</b>		
Auto-vibe Function	✓		Product Link™	✓	
Rear Adjustable Steel Scraper	✓		Sight Gauges for Hydraulic Oil Level and Radiator Coolant Level	✓	
Dual Adjustable Steel Scrapers		✓	S.O.S <sup>SM</sup> Sampling Valves: Engine Oil, Hydraulic Oil and Coolant	✓	
Dual Adjustable Polyurethane Scrapers		✓	High Ambient Temperature Oil Factory Fill		✓
			Upgraded LED Light Package		✓
			Amber Rotating Beacon		✓
			Flotation Tread or Lug Tread Tires		✓

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

QEXQ2863 (07-2021)

© 2021 Caterpillar All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

