



Cat[®] AP500

Asphalt Paver

The Cat[®] AP500 asphalt paver and SE47 Series screeds are designed for urban streets, parking lots, rural roads and many other small to intermediate-type applications. This paver and screed combination provides high throughput capability as-well-as application versatility, easy set-up, and a wide paving range.

More Performance and Flexibility

- Powerful C4.4 engine delivers 110 kW (148 hp) of power that supports increased feeder system capacity as well as hopper inserts for continuous paving
- Tight 90° turning capability enables the paver to rotate and cover tracks on a return paving pass
- Standard paving range utilizing the SE47 V screed is 2.4 m - 4.7 m (8' - 15'6") with a maximum width of 6.1 m (20')
- Standard paving range utilizing the SE47 FM screed is 2.4 m - 4.7 m (8' - 15'6") with a maximum width of 6.2 m (20' 6")
- Paving depths up to 250 mm (10") supports aggregate paving applications

Transport Made Easy

- Machine weight of less than 14.5 mt (32,000 lb) paver and screed combination enables easy transport on a variety of trailer types
- Length of less than 5.65 m (18' 6") and width of 2.6 m (8' 6") accommodates machine transport without special permits
- The front-loading angle of 17° and high front bumper clearance reduces the need for additional blocking when loading onto various trailer designs
- Front, middle, and rear tie-down locations make securing the paver highly efficient for quick travel to the next job site

Exceptional Mobility With Fast Travel Speed

- Wheel undercarriage provides exceptional mobility and fast travel speeds for unmatched maneuverability around the job site
- Excellent traction is delivered through the 14.00x20 sand-rib or 17.5 R25 radial drive tires
- Front-wheel assist option provides power to the rear set of bogie wheels for excellent performance in tough conditions
- All-wheel drive option utilizes a flow divider to deliver power to both sets of front bogie wheels for additional pulling power
- High ground clearance of 197 mm (7.8") helps avoid storm drains, curbs, and other obstacles

Smooth Material Flow

- Optimized hopper design with low truck entry height and short front apron enhances material flow while simplifying clean-out
- Enhanced feeder system with 355 mm (14") diameter augers provides consistent material flow across the screed for efficient flow at both narrow and wide paving widths
- Confined auger chamber keeps material moving and helps eliminate stagnate cold patches
- Independent control of each material feed sensor when utilizing a cut-off shoe, simply turn off the sensor for manual proportional feed control



Cat® AP500 Asphalt Paver

More Comfort

- Ventilation system draws fumes from the auger chamber and redirects them away from the operator for a more comfortable working environment
- Dual independent consoles provide operation from either side of the machine for optimal visibility to curbs, edges, and transverse joints
- Dual independent seats swing out 40° beyond the platform for good visibility to curbs and obstacles
- Optimized height and integrated exhaust provide unobstructed visibility around the machine
- Optional screed and paver mounted umbrellas offer protection from direct sunlight
- Heated seat option delivers comfort in cool weather
- High visibility 76 mm (3") seat belt assists with crew safety compliance

Easy Viewing Displays, Simple Operation

- High-definition, touchscreen displays with adjustable brightness control for all types of lighting conditions, including direct sunlight
- High-visibility touch screen operating display with simplified menu structures, intuitive graphics, and short-cut keys help simplify machine adjustments
- Single-touch functions from main screen include screed heat, wash-down system, vibratory activation, ventilation system, accessory panel
- Operating displays can be tailored to specific language requirements with multiple options available
- Wash-down system includes level indication

Screeds That Deliver Quality

- SE-Series screeds deliver excellent ride, density, and mat texture while providing superior adjustment capabilities
- Screeds with front-mounted extenders and rear-mounted extenders are available
- Cat Grade Control or Basic Grade Control options available
- Refer to the screed "Key Features" for more details

Low Owning and Operating Costs

- Durable Cat C4.4 engine provides 110 kW (148 hp) of power and meets U.S. EPA Tier 4 Final and EU Stage V emissions
- Exclusive Eco-mode and Automatic Engine Speed Control reduce fuel consumption and lower sound levels for better comfort and communication
- Conveyor bed plates and chain guards designed to minimize labor requirements and provide lower cost replacement
- Maintenance-free high torque motors reduce service requirements for the auger and conveyor drive systems

Cat Electronics

- Cat Electronic Control Modules (ECM) and ET compatibility simplifies diagnostics and trouble-shooting procedures
- Dedicated auto reset circuit breaker for material sensors

Product Link™ Elite

- Make timely, fact-based decisions to maximize efficiency, improve productivity, and lower owning and operating costs
- Easily track location, machine hours, fuel usage, and idle time
- Diagnostic codes are made available through online web applications
- Remote flash works around your schedule to ensure your machine's software is up to date for optimal performance

Service and Repair Kits

- Paver and screed service and repair kits include all the parts necessary to complete specific repairs
- Cat genuine parts are manufactured to precise specifications and designed for optimal performance and maximum uptime
- Repair kits are identified by a single part number to make ordering easy
- Select kits are available to be packaged as a kit by the dealer for over-the-counter purchases or through the dealer service shop

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
OPERATING ENVIRONMENT		
Canopy		✓
Deceleration pedal		✓
Dual operating consoles		
Heated seat		✓
Steering guide	✓	
Umbrella – tractor or screed		✓
Ventilation system	✓	
Side shields		✓
Windshield – requires canopy		✓

TECHNOLOGY		
Cat Grade Control		✓
Basic Grade Control		✓
Product Link™ Elite 643 (cellular)	✓	
Product Link Elite 683 (cellular/satellite)		✓

POWERTRAIN		
All-wheel drive		✓
Ballast – front weights		✓
Cat C4.4 – four-cylinder	✓	
Cooling fan – variable speed	✓	
Front-wheel assist		✓
Radial drive tires		✓
Sand-rib drive tires		✓

ELECTRICAL SYSTEM		
1400 CCA battery	✓	
150-amp alternator	✓	
12-volt charging system	✓	
Automotive-type fuse system	✓	
Auto-reset breaker for material feed sensors	✓	
Battery – maintenance-free	✓	
Cat Electronic Technician (Cat ET)	✓	

	Standard	Optional
MATERIAL DELIVERY		
Auger extensions – 0.15 m (6")	✓	
Auger extensions – 0.46 m (1.5')		✓
Mainframe extensions – power		✓
Mainframe extensions – manual		✓
Material feed sensors – contact	✓	
Material feed sensors – sonic		✓
Push-roller – adjustable	✓	
Truck hitch		✓
Wash-down pump and reel		✓

SERVICE AND MAINTENANCE		
Hydraulic oil – Cat HYDO Advanced	✓	
Remote access drains	✓	
Remote flash	✓	
Service repair kits	✓	
Sampling ports for Scheduled Oil Sampling (S-O-S SM)	✓	
Sight Gauges - engine coolant, hydraulic oil	✓	

SAFETY		
Alarm – back-up	✓	
Horn – warning (front & rear)	✓	
Lights – LED Working	✓	
Lights – LED Rooding		✓
Mirror package	✓	
Warning beacon – LED		✓

Cat® AP500 Asphalt Paver

Technical Specifications

PowerTrain

Engine Model	Cat C4.4	
Rated Power @ 2400 rpm	110 kW	148 hp
Global Emissions: <i>US EPA Tier 4 Final/EU Stage V equivalent</i>		
Speed – paving	61 m/min	200 ft/min
Speed – travel	16 km/hr	10 mph
Tire size	17.5 R25	

Service Refill Capacities

Maximum throughput capacity	1000 Tonnes	1100 US Tons
Hopper capacity	6.1 m ³	215 ft ³
Fuel Tank	200 L	53 gal
Cooling System	24 L	6.3 gal
Engine Oil	9 L	2.4 gal
Hydraulic Tank	121 L	32 gal
DEF Tank	19 L	5 gal
Washdown Spray Tank	32 L	8.5 gal

Dimensions

1	Operating length w/ SE47 V screed	5909 mm	19' 4"
	Shipping length w/ SE47 V screed	5648 mm	18' 6"
	Operating length w/ SE47 FM screed	5865 mm	19' 3"
	Shipping length w/ SE47 FM screed	5630 mm	18' 6"
2	Operating width (hoppers lowered)	3281 mm	10' 9"
3	Operating height (beacon)	3352 mm	11'
4	Operating platform height	1731 mm	5' 8"
5	Transport height (steering wheel)	2583 mm	8' 5"
6	Transport width w/end gates	2590 mm	8' 6"
7	Truck entry width	3149 mm	10' 4"
8	Truck entry height (hopper)	537 mm	21"
	Truck entry height (apron)	507 mm	20"
	Ground clearance	197 mm	7.8"
9	Hopper length	1925 mm	6' 4"
10	Axle to axle - center drive to front idler	2338 mm	92"
	Auger diameter	355 mm	14"

Machine Weight

Paver only (shipping)	11 481 kg	25,311 lb
w/SE47 V screed (operating)	14 409 kg	31,772 lb
w/SE47 FM screed (operating)	14 518 kg	32,012 lb

Operating Weights are approximate and include coolant, lubricants, full fuel tank, 75 kg (165 lb) operator, and grade control components.


Paving Range

SE47 V

Standard range	2.4 m - 4.7 m	8' - 15' 6"
Maximum width w/extensions	6.1 m	20'

SE47 FM

Standard range	2.4 m - 4.7 m	8' - 15' 6"
Maximum width w/extensions	6.2 m	20' 6"

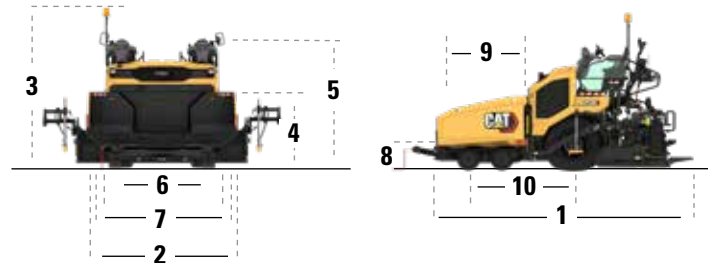

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2021 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

VisionLink is a trademark of Trimble Navigation Limited, registered in the United States and in other countries.

QEHQ2895 (10-2021)
Build Number:07A
(North America)

