



Cat® AP400

Asphalt Paver

The Cat® AP400 Asphalt Paver provides easy transport, application versatility, and a wide paving range, making it the perfect match for urban streets, parking lots, rural roads and many other small to intermediate-type applications.

Compact Size With Big Opportunities

- The compact size and small footprint simplify maneuverability in tight spaces for efficient work in urban-type applications
- Tight 90° turning capability enables the paver to rotate and cover tracks on a return paving pass
- Standard paving range utilizing the SE47 V screed is 2.4 m - 4.7 m (8' - 15' 6") with a maximum width of 6.1 m (20')
- Standard paving range utilizing the SE47 FM screed is 2.4 m - 4.7 m (8' - 15' 6") with a maximum width of 5.9 m (19' 6")
- Paving depths up to 250 mm (10") supports aggregate paving applications

Transport Made Easy

- Machine weight of less than 13.6 mt (30,000 lb) paver and screed combination enables easy transport on a variety of trailer types
- Length of less than 5.5 m (18' 1") and width of 2.6 m (8' 6") accommodates machine transport without special permits
- The front-loading angle of 20° and high front bumper clearance reduces the need for additional blocking when loading onto various trailer designs
- Front, middle, and rear tie-down locations make securing the paver efficient for quick travel to the next job site

Exceptional Mobility With Fast Travel Speed

- Wheel undercarriage provides exceptional mobility and fast travel speeds for unmatched maneuverability around the job site
- Excellent traction is delivered through the 14.00x20 sand-rib or 15.5 R25 radial drive tires
- Front-wheel assist option provides power to the rear set of bogie wheels for excellent performance in tough conditions
- High, front ground clearance of 203 mm (8") helps avoid storm drains, curbs, and other obstacles

Smooth Material Flow

- Low truck entry height and short front apron enhances material flow while simplifying clean-out
- Feeder system design with 355 mm (14") diameter augers provides consistent material flow across the screed for efficient flow at both narrow and wide paving widths
- Narrow auger chamber keeps material moving and helps eliminate stagnate patches
- Independent control of each material feed sensor when utilizing a cut-off shoe, simply turn off the sensor for manual proportional feed control



Cat® AP400 Asphalt Paver

More Comfort

- Ventilation system draws fumes from the auger chamber and redirects them away from the operator for a more comfortable working environment
- Single sliding console enables operation from either side of the machine
- Dual independent seats swing out 40° beyond the platform for good visibility to curbs and obstacles
- Optimized height and integrated exhaust provide unobstructed visibility around the machine
- Optional screed and paver mounted umbrellas offer protection from direct sun
- Heated seat option delivers comfort in cool weather conditions
- High visibility 76 mm (3") seat belt helps with crew safety compliance

Easy Viewing Displays, Simple Operation

- High-definition, touchscreen displays with adjustable brightness control for all types of lighting conditions, including direct sunlight
- New touch screen operating display with simplified menu structures, intuitive graphics, and short-cut keys help simplify machine adjustments
- Single-touch functions from the main screen include screed heat, wash-down system, vibratory activation, ventilation system, and the accessory panel
- Operating displays can be tailored to specific language requirements with multiple options available
- Wash-down system includes level indication

Screeds That Deliver Quality

- SE-Series screeds deliver excellent ride, density, and mat texture while providing superior adjustment capabilities
- Screeds with front-mounted extenders and rear-mounted extenders are available
- Cat® Grade Control or Basic Grade Control options available
- Refer to the screed "Key Features" for more details

Low Owning and Operating Costs

- Durable Cat C3.6 engine provides 90 kW (120 hp) of power and meets U.S. EPA Tier 4 Final emission standards
- Exclusive Eco-mode and Automatic Engine Speed Control reduce fuel consumption and lowers sound levels for better job site communication
- Conveyor bed plates and chain guards are designed to minimize labor requirements and lower replacement costs
- Maintenance-free high torque motors for the auger and conveyor drive systems reduce service requirements

Cat Electronics

- Cat Electronic Control Modules (ECM) and Electronic Technician (ET) compatibility simplifies diagnostics and trouble-shooting procedures
- Dedicated auto reset circuit breaker for material sensors

Product Link™ Elite

- Make timely, fact-based decisions to maximize efficiency, improve productivity, and lower owning and operating costs
- Easily track location, machine hours, fuel usage, and idle time in real time
- Diagnostic codes are made available through online web applications
- Remote flash for easy software updates
- Remote disable deactivates the engine for enhanced security

Service and Repair Kits

- Paver and screed service and repair kits include all the parts necessary to complete specific repairs
- Cat genuine parts are manufactured to precise specifications and designed for optimal performance and maximum uptime
- Repair kits are identified by a single part number to make ordering easy
- Select kits are available to be packaged as a kit by the dealer for over-the-counter purchases or through the dealer service shop


Standard and Optional Equipment*Standard and optional equipment may vary. Consult your Cat dealer for details.*

	Standard	Optional	Standard	Optional
OPERATING ENVIRONMENT			MATERIAL DELIVERY	
Canopy	✓		Auger extensions – 0.15 m (6")	✓
Deceleration pedal	✓		Auger extensions – 0.46 m (1.5')	✓
Heated Seat	✓		Mainframe extensions – power	✓
Single sliding console	✓		Mainframe extensions – manual	✓
Steering guide	✓		Material feed sensors – contact	✓
Umbrella – tractor or screed	✓		Material feed sensors – sonic	✓
Ventilation system	✓		Push-roller – adjustable	✓
Side shields	✓		Truck hitch	✓
Windshield – requires canopy	✓		Wash-down pump and reel	✓
TECHNOLOGY			SERVICE AND MAINTENANCE	
Cat® Grade Control	✓		Hydraulic oil – Cat HYDO™ Advanced	✓
Basic Grade Control	✓		Remote access drains	✓
Product Link™ Elite 643 (cellular)	✓		Remote flash	✓
Product Link Elite 683 (cellular/satellite)	✓		Service repair kits	✓
POWERTRAIN			Sampling ports for Scheduled Oil Sampling (S-O-S™)	✓
Ballast – front weights	✓		Sight Gauges – engine coolant, hydraulic oil	✓
Cat C3.6 – four-cylinder	✓		SAFETY	
Cooling fan – variable speed	✓		Alarm – back-up	✓
Radial drive tires	✓		Horn – warning (front & rear)	✓
Sand-rib drive tires	✓		Lights – LED Working	✓
Front-wheel assist	✓		Lights – LED Roading	✓
ELECTRICAL SYSTEM			Mirror package	✓
1400 CCA battery	✓		Warning beacon – LED	✓
150-amp alternator	✓			
12-volt charging system	✓			
Automotive-type fuse system	✓			
Auto-reset breaker for material sensors	✓			
Battery – maintenance-free	✓			
Cat Electronic Technician (Cat ET)	✓			

Cat® AP400 Asphalt Paver

Technical Specifications

PowerTrain			Dimensions		
Engine model			Cat C3.6		
Engine power @ 2200 rpm (ISO 14396-2002)			90 kW	120 hp	
Meets U.S. EPA Tier 4 Final emission standards.					
Speed – paving			61 m/min	200 ft/min	
Speed – travel			16 km/hr	10 mph	
Tire Size			15.5 R25		
Capacities					
Maximum throughput capacity	774 Tonnes	853 US Tons			
Hopper capacity	5.8 m ³	205 ft ³			
Fuel tank	200 L	53 gal			
Cooling system	24 L	6.3 gal			
Engine oil	11 L	2.9 gal			
Hydraulic tank	121 L	32 gal			
Diesel Exhaust Fluid (DEF) tank	19 L	5 gal			
Washdown spray tank	32 L	8.5 gal			
Machine Weight					
Paver only (shipping)	10 581 kg	23,327 lb			
w/SE47 V screed (operating)	13 510 kg	29,800 lb			
w/SE47 FM screed (operating)	13 618 kg	30,000 lb			
<i>Operating Weights are approximate and include coolant, lubricants, full fuel tank, 75 kg (165 lb) operator, and grade control components.</i>					
Paving Range					
SE47 V					
Standard range	2.4 m - 4.7 m	8' - 15' 6"			
Maximum width w/extensions	6.1 m	20'			
SE47 FM					
Standard range	2.4 m - 4.7 m	8' - 15' 6"			
Maximum width w/extensions	5.9 m	19' 6"			

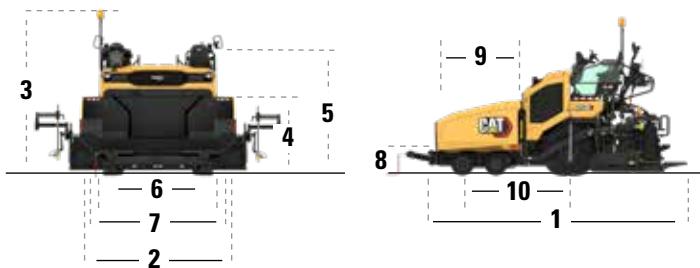

Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit www.caterpillar.com/en/company/sustainability.html.

ENGINE

- The Cat® C3.6 engine is available in configurations that meet U.S. EPA Tier 4 Final emission standards.
- Cat U.S. EPA Tier 4 Final diesel engine is required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

PAINT

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

SOUND PERFORMANCE

With cooling fan speed at 70% of maximum value, engines meeting U.S. EPA Tier 4 Final:

Operator Sound Pressure Level – 86 dB(A) European Directive 2000/14/EC, ISO 11201, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

Exterior Sound Power Level – 104 dB(A) European Directive 2000/14/EC, ISO 11201, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

- Hearing protection may be needed when operating with an open operator station for extended periods or in a noisy environment.

OILS AND FLUIDS

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

FEATURES AND TECHNOLOGY

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Eco-mode operates at a lower rpm to minimize fuel consumption
 - Automatic engine speed control modifies engine speed when moved to and from neutral to enhance fuel efficiency
 - Advanced Eco-mode combines automatic engine speed control and Eco-mode to modify engine speed based on engine load, conserving fuel and increasing efficiency
 - Extended maintenance intervals reduce fluid and filter consumption

Cat® AP400 Asphalt Paver

Cat® AP400 Asphalt Paver

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2022 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

QEHQ2893-03 (10-2022)
Build Number:07A
(North America)

