



# Cat<sup>®</sup> CP12 GC

## *Padfoot Drum Vibratory Soil Compactor*

*The Cat<sup>®</sup> CP12 GC features a padfoot drum and is ideally suited for cohesive and semi-cohesive soil applications.*

### **Superior Compaction Performance**

- High weight at the drum and high amplitude deliver superior compaction performance

### **Comfortable and Ergonomic Operator Station**

- Simple controls are within reach
- Outstanding visibility to the front and rear of the machine

### **Proven and Exclusive Cat Features**

- Includes the ultra-reliable pod-style vibratory system and sealed-for-life hitch bearing

### **Reliable Cat Engine**

- The Cat engine provides ample power and consistent performance
- Standard Eco-mode reduces fuel use during normal operation

### **Simple Maintenance**

- Maintenance-free hitch bearings and extended maintenance intervals for vibratory system and hydraulic system provide more uptime and lower maintenance costs

### **Optional Cat Compaction Control Technology**

- Compaction control helps the operator determine when compaction has been completed to specification for greater productivity and uniform compaction quality
- Scalable solutions can be configured to meet customer needs



# Cat® CP12 GC Padfoot Drum Vibratory Soil Compactor

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.


	Standard	Optional		Standard	Optional
<b>OPERATOR ENVIRONMENT</b>			<b>POWERTRAIN</b>		
Steel Canopy w/ Handrails/Guardrails, Floor Mat	✓		Cat® C4.4 Diesel Engine, 4 cylinder	✓	
Vinyl Adjustable Seat, Seat Belt	✓		Single Propel Pump	✓	
Adjustable Tilting Steering Column	✓		Fuel Filter, Water Separator, Priming Pump, Water Indicator	✓	
12-volt Power Outlet	✓		Radiator/Hydraulic Oil Cooler	✓	
Horn, Backup Alarm	✓		Dual Braking System	✓	
Internal Rear View Mirror	✓		Two-speed Hydrostatic Transmission	✓	
ROPS/FOPS Canopy w/ Handrails/Guardrails, Floormat		✓	Transmission Guard	✓	
Rear View Camera with Color Touchscreen Display (Cab)		✓	<b>TECHNOLOGY SOLUTIONS</b>		
Sun/Debris Shields (Canopy)		✓	Measure - Machine Drive Power		✓
Cab Internal Roll-down Sun Screen (Cab)		✓	Map - SBAS GNSS Mapping		✓
Sound Reduction Kit		✓	Connect - Cloud and Machine Connectivity		✓
Sun Visor (Cab)		✓	<b>ELECTRICAL</b>		
Vinyl Suspension Seat w/ Arm Rest		✓	12 volt Electrical System	✓	
Deluxe High-back Air-ride Seat (Cab)		✓	120 ampere Alternator	✓	
<b>VIBRATORY SYSTEM</b>			900 Cold-cranking Amps Battery Capacity	✓	
Padfoot Drum	✓		<b>OTHER</b>		
Dual Amplitude, Dual Frequency	✓		Product Link™	✓	
Pod-Style Eccentric Weight Housings	✓		Sight Gauges for Hydraulic Oil Level and Radiator Coolant Level	✓	
Auto-vibe Function	✓		S•O•S <sup>SM</sup> Sampling Valves: Engine Oil, Hydraulic Oil, and Coolant	✓	
Dual Adjustable Steel Scrapers	✓		Lug Tread Tires	✓	
			High Ambient Temperature Oil Factory Fill		✓
			Additional External Rear View Mirror		✓
			Upgraded LED Light Package		✓
			Amber Rotating Beacon		✓

# Cat® CP12 GC Padfoot Drum Vibratory Soil Compactor

## Vibratory Soil Compactor Selection Guide

10 - 15 T

Assumes density specification is 95% of Standard Proctor and can vary substantially due to different soil conditions.

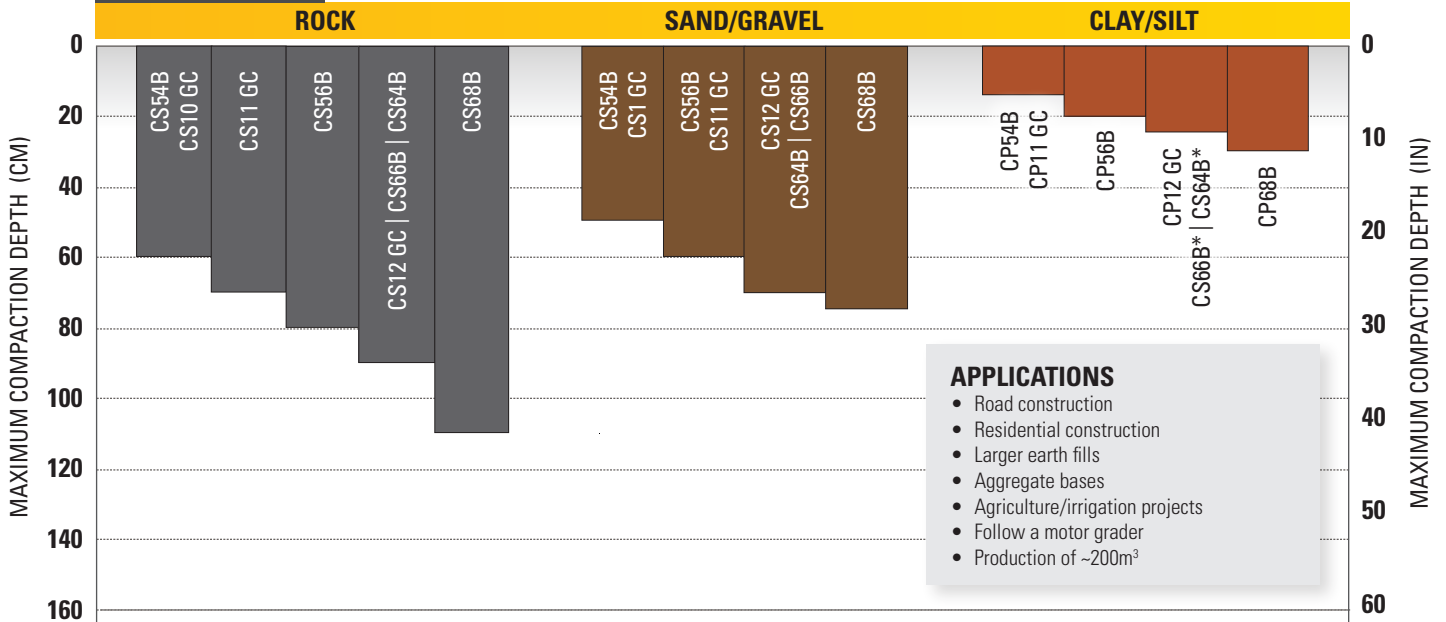

### APPLICATIONS

- Road construction
- Residential construction
- Larger earth fills
- Aggregate bases
- Agriculture/irrigation projects
- Follow a motor grader
- Production of ~200m<sup>3</sup>

#### Rock

Smooth drum, high amplitude moving to low amplitude when approaching compaction, 4-8 passes

Size: Less than 50 mm (2 in) diameter

#### Sand/Gravel

Smooth drum, high amplitude moving to low amplitude when approaching compaction, 4-6 passes

#### Clay/Silt

Padfoot and smooth drum application (for smoothing), 4-10 passes. Compaction in cohesive soils strongly depends on moisture content.

\* Smooth drum model equipped with padfoot shell kit

Not all models are available in each region. Contact your Cat® dealer representative for more information.

# Cat® CP12 GC Padfoot Drum Vibratory Soil Compactor

## Technical Specifications

### Engine - Powertrain

Engine Model	Cat C4.4	
Emissions	Brazil MAR-1, equivalent to U.S. EPA Tier 3 and EU Stage IIIA	
Engine Power ISO 14396:2002	83.0 kW	111.3 hp
Gross Power SAE J1995:2014	83.8 kW	112.4 hp
Net Power ISO 9249:2007*	79.4 kW	106.5 hp
Net Power SAE J1349:2011*	78.5 kW	105.3 hp
Displacement	4.4 L	268.5 in <sup>3</sup>
Stroke	127 mm	5.0 in
Bore	105 mm	4.1 in
Max. Travel Speed (Forward or Reverse)	11 km/h	6.84 mph
Theoretical Gradeability, with or without vibration**	50%	

### Vibratory System Specifications

Nominal Amplitude - High	1.8 mm	0.071 in
Frequency at High Idle	30.0 Hz	1800 vpm
Frequency at Eco-Mode	28.6 Hz	1716 vpm
Nominal Amplitude - Low	0.89 mm	0.035 in
Frequency at High Idle	33 Hz	1980 vpm
Frequency at Eco-Mode	31.5 Hz	1890 vpm
Centrifugal Force		
Maximum	249 kN	55,932 lb
Minimum	148 kN	33,249 lb
French Classification, data/class w/ ROPS/FOPS Cab	48.8	VM3

### Service Refill Capacities

Fuel Tank, total capacity	248 L	65.6 gal
Cooling System	18.5 L	4.9 gal
Engine Oil w/ Filter	9.5 L	2.5 gal
Eccentric Weight Housings (combined)	26 L	6.9 gal
Axle and Final Drives	10 L	2.6 gal
Hydraulic Tank (service refill)	23 L	6.1 gal

### Weights\*\*\*

Operating Weight w/ Sun Canopy		
w/ Oval Padfoot Shell	12 307 kg	27,132 lb
w/ Square Padfoot Shell	12 339 kg	27,203 lb
Operating Weight w/ ROPS/FOPS Canopy		
w/ Oval Padfoot Shell	12 485 kg	27,524 lb
w/ Square Padfoot Shell	12 517 kg	27,594 lb
Operating Weight w/ ROPS/FOPS Cab		
w/ Oval Padfoot Shell	12 639 kg	27,863 lb
w/ Square Padfoot Shell	12 671 kg	27,934 lb
Weight at Drum w/ Sun Canopy		
w/ Oval Padfoot Shell	7655 kg	16,877 lb
w/ Square Padfoot Shell	7687 kg	16,947 lb
Weight at Drum w/ ROPS/FOPS Canopy		
w/ Oval Padfoot Shell	7725 kg	17,030 lb
w/ Square Padfoot Shell	7757 kg	17,100 lb
Weight at Drum w/ ROPS/FOPS Cab		
w/ Oval Padfoot Shell	7767 kg	17,123 lb
w/ Square Padfoot Shell	7800 kg	17,195 lb

\* Net power advertised is the power available at the engine flywheel when equipped with a fan at maximum speed, air cleaner, clean emissions module, and alternator.

\*\* Actual gradeability may vary based on site conditions and machine configuration. Refer to the Operation and Maintenance Manual for more information.

\*\*\* Standard operating weight considers full fuel tank, 75 kg operator, flotation tires, padfoot drum, and cab with A/C.



The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 2.2 kg of refrigerant, which has a CO<sub>2</sub> equivalent of 3.146 metric tonnes.

# Cat® CP12 GC Padfoot Drum Vibratory Soil Compactor

## Technical Specifications

Header			
1	Overall Length	5.7 m	18.71 ft
2	Overall Width	2.3 m	7.5 ft
3	Drum Width	2134 mm	84 in
4	Drum Shell Thickness	25 mm	1.0 in
5	Drum Diameter (over pads)	1549 mm	60.9 in
6	Overall Height	3.0 m	9.8 in
7	Wheelbase	3.0 m	9.8 in
8	Ground Clearance	516 mm	20.3 in
9	Curb Clearance	496 mm	19.5 in
	Inside Turning Radius	3.9 m	12.7 ft
	Hitch Articulation Angle	34°	
	Hitch Oscillation Angle	15°	

Padfoot Specifications			
Number of Pads		140	
Pad Height, oval pads		127 mm	5.0 in
Pad Face Area, oval pads		74.4 cm <sup>2</sup>	11.5 in <sup>2</sup>
Pad Height, optional square pads		100 mm	3.9 in
Pad Face Area, optional square pads		123 cm <sup>2</sup>	19.1 in <sup>2</sup>
Number of Chevrons		14	

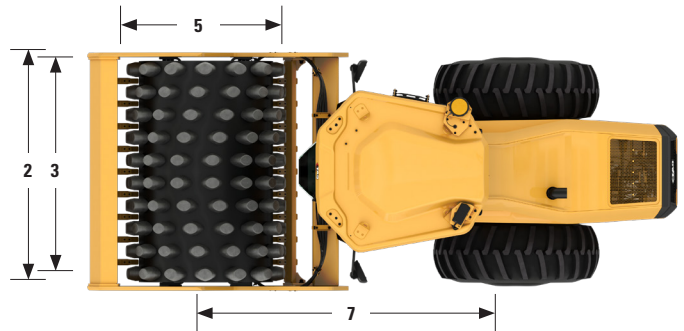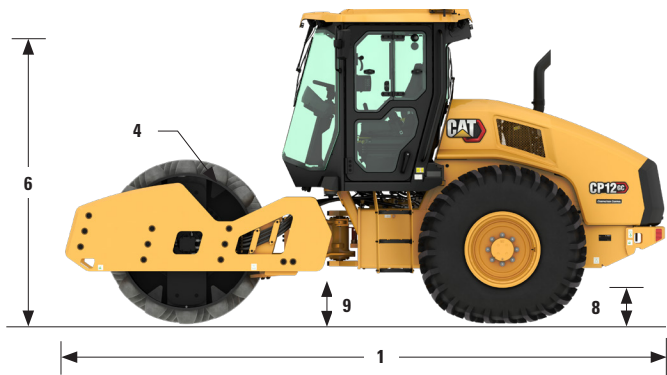

**Cat® CP12 GC Padfoot Drum Vibratory Soil Compactor**

---



# Cat® CP12 GC Padfoot Drum Vibratory Soil Compactor

---



For more information on Cat products, dealer services, and industry solutions visit us on the web at [www.cat.com](http://www.cat.com).

© 2022 Caterpillar  
All rights reserved.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

QEHQ2938-02 (10-2022)  
Build Number: 01A  
LRC

