



Cat[®] CP11 GC

Padfoot Drum Vibratory Soil Compactor

The Cat[®] CP11 GC features a padfoot drum and is ideally suited for cohesive and semi-cohesive soil applications.

Superior Compaction Performance

- High weight at the drum and high amplitude deliver superior compaction performance.

Comfortable and Ergonomic Operator Station

- Simple controls are within reach.
- Outstanding visibility to the front and rear of the machine.

Proven and Exclusive Cat Features

- Includes the ultra-reliable pod-style vibratory system and sealed-for-life hitch bearing.

Reliable Cat Engine

- The Cat engine provides ample power and consistent performance.
- Standard Eco-mode reduces fuel use during normal operation.

Simple Maintenance

- Maintenance-free hitch bearings and extended maintenance intervals for vibratory system and hydraulic system provide more uptime and lower maintenance costs.

Optional Cat Compaction Control Technology

- Compaction control helps the operator determine when compaction has been completed to specification for greater productivity and uniform compaction quality.
- Scalable solutions can be configured to meet customer needs.



Cat® CP11 GC Padfoot Drum Vibratory Soil Compactor

Technical Specifications

Engine - Power Train

Engine Model	Cat C4.4	
Global Emissions	US EPA Tier 3 EU Stage IIIA	
Gross Power ISO 14396	83.0 kW	111.3 hp
Gross Power SAE J1995	83.8 kW	112.4 hp
Net Power ISO 9249*	79.4 kW	106.5 hp
Net Power SAE J1349*	78.5 kW	105.3 hp
Displacement	4.4 L	268.5 in ³
Stroke	127 mm	5.0 in
Bore	105 mm	4.1 in
Max. Travel Speed (Forward or Reverse)	11 km/h	6.84 mph
Theoretical Gradeability, with or without vibration**	55%	

Vibratory System Specifications

Nominal Amplitude - High	1.8 mm	0.071 in
Frequency at High Idle	30.0 Hz	1800 vpm
Frequency at Eco-Mode	28.6 Hz	1716 vpm
Nominal Amplitude - Low	0.89 mm	0.035 in
Frequency at High Idle	33 Hz	1980 vpm
Frequency at Eco-Mode	31.5 Hz	1890 vpm
Centrifugal Force		
Maximum	249 kN	55,932 lb
Minimum	148 kN	33,249 lb
French Classification, data/class w/ ROPS/FOPS cab	40.3	VM3

Service Refill Capacities

Fuel Tank, total capacity	248 L	65.5 gal
Cooling System	18.5 L	4.9 gal
Engine Oil w/ Filter	9.5 L	2.5 gal
Eccentric Weight Housings (combined)	26 L	6.9 gal
Axle and Final Drives	10 L	2.6 gal
Hydraulic Tank (service refill)	23 L	6.1 gal

Weights

Operating Weight w/ Sun Canopy		
w/ Oval Padfoot	11 055 kg	24,372 lb
w/ Square Padfoot	11 087 kg	24,443 lb
Operating Weight w/ ROPS/FOPS Canopy		
w/ Oval Padfoot	11 233 kg	24,764 lb
w/ Square Padfoot	11 265 kg	24,835 lb
Operating Weight w/ ROPS/FOPS Cab***		
w/ Oval Padfoot	11 387 kg	25,104 lb
w/ Square Padfoot	11 419 kg	25,174 lb
Weight at Drum w/ Sun Canopy		
w/ Oval Padfoot	6303 kg	13,894 lb
w/ Square Padfoot	6334 kg	13,965 lb
Weight at Drum w/ ROPS/FOPS Canopy		
w/ Oval Padfoot	6372 kg	14,047 lb
w/ Square Padfoot	6404 kg	14,118 lb
Weight at Drum w/ ROPS/FOPS Cab		
w/ Oval Padfoot	6415 kg	14,142 lb
w/ Square Padfoot	6447 kg	14,212 lb


* Net power advertised is the power available at the engine flywheel when equipped with a fan at maximum speed, air cleaner, clean emissions module, and alternator.

** Actual gradeability may vary based on site conditions and machine configuration. Refer to the Operation and Maintenance Manual for more information.

*** Standard operating weight considers full fuel tank, 75 kg operator, flotation tires, padfoot drum, and cab with A/C.

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 2.2 kg of refrigerant, which has a CO₂ equivalent of 3.146 metric tonnes.

Cat® CP11 GC Padfoot Drum Vibratory Soil Compactor

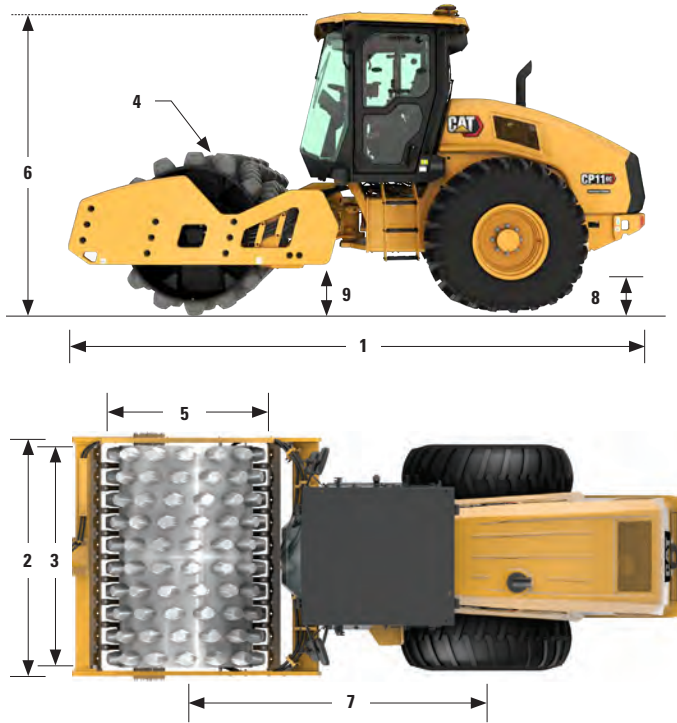

Dimensions

1	Overall Length	5.70 m	18.71 ft
2	Overall Width	2.30 m	7.53 ft
3	Drum Width	2134 mm	84 in
4	Drum Shell Thickness	25 mm	0.98 in
5	Drum Diameter, over pads	1549 mm	60.9 in
6	Overall Height	3.0 m	9.8 ft
7	Wheelbase	3.0 m	9.8 ft
8	Ground Clearance, oval padfoot	516 mm	20.3 in
	Ground Clearance, square padfoot	525 mm	20.7 in
9	Curb Clearance, oval padfoot	496 mm	19.5 in
	Curb Clearance, square padfoot	480 mm	18.9 in
	Inside Turning Radius	3.86 m	12.7 ft
	Hitch Articulation Angle	34°	
	Hitch Oscillation Angle	15°	


Padfoot Specifications

Number of Pads	140	
Pad Height, oval pads	127 mm	5.0 in
Pad Face Area, oval pads	74.4 cm ²	11.5 in ²
Pad Height, optional square pads	100 mm	3.9 in
Pad Face Area, optional square pads	123 cm ²	19.1 in ²
Number of Chevrons	14	

Vibratory Soil Compactor Selection Guide

10 - 15 T

Assumes density specification is 95% of Standard Proctor and can vary substantially due to different soil conditions.

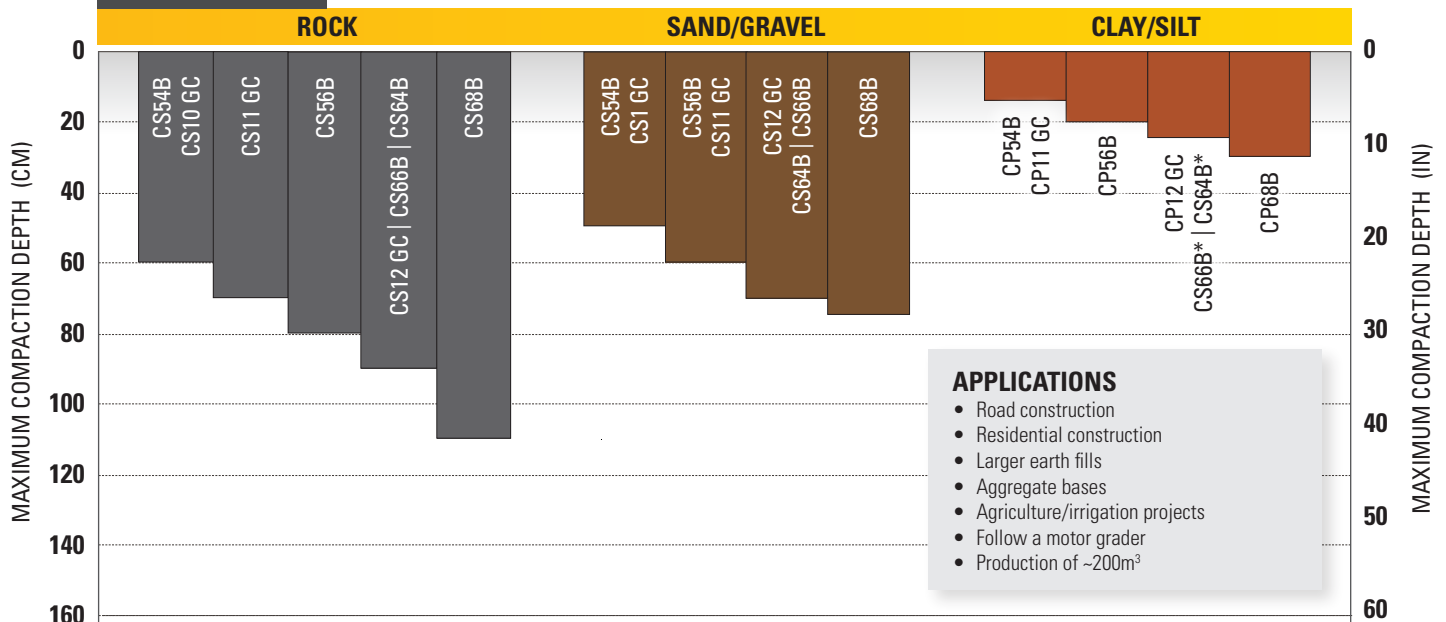

APPLICATIONS

- Road construction
- Residential construction
- Larger earth fills
- Aggregate bases
- Agriculture/irrigation projects
- Follow a motor grader
- Production of ~200m³

Rock
Smooth drum, high amplitude moving to low amplitude when approaching compaction, 4-8 passes

Sand/Gravel
Smooth drum, high amplitude moving to low amplitude when approaching compaction, 4-6 passes

Clay/Silt
Padfoot and smooth drum application (for smoothing), 4-10 passes. Compaction in cohesive soils strongly depends on moisture content.

Size: Less than 50 mm (2 in) diameter

* Smooth drum model equipped with padfoot shell kit

Not all models are available in each region. Contact your Cat® dealer representative for more information.

Cat® CP11 GC Padfoot Drum Vibratory Soil Compactor

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
OPERATOR ENVIRONMENT			POWER TRAIN		
Sun Canopy w/ Platform Handrails/Guardrails, Floormat	✓		Cat C4.4 Diesel Engine, 4 cylinder	✓	
Vinyl Adjustable Seat, Seat Belt	✓		Single Propel Pump	✓	
Adjustable Tilting Steering Column	✓		Dual Fuel Filter, Water Separator, Priming Pump, Water Indicator	✓	
12 volt Power Outlet	✓		Radiator/Hydraulic Oil Cooler	✓	
Horn, Backup Alarm	✓		Dual Braking System	✓	
Internal Rear View Mirror	✓		Two-speed Hydrostatic Transmission	✓	
ROPS/FOPS Canopy w/ Handrails/Guardrails, Floormat		✓	Transmission Guard		✓
ROPS/FOPS Cab w/ Climate Control		✓	TECHNOLOGY SOLUTIONS		
Rear View Camera w/ Color Touchscreen Display (Cab)		✓	Measure - Machine Drive Power		✓
Sun/Debris Shields (Canopy)		✓	Map - SBAS GNSS Mapping		✓
Cab Internal Roll-down Sun Screen (Cab)		✓	Connect - Cloud and Machine Connectivity		✓
Sound Reduction Kit		✓	ELECTRICAL		
Sun Visor (Cab)		✓	12 volt Electrical System	✓	
Vinyl Suspension Seat w/ Armrest		✓	120 ampere Alternator	✓	
Deluxe High-back Air-ride Seat (Cab)		✓	900 Cold-cranking Amps Battery Capacity	✓	
VIBRATORY SYSTEM			OTHER		
Padfoot Drum	✓		Product Link™	✓	
Dual Amplitude, Dual Frequency	✓		Sight Gauges for Hydraulic Oil Level and Radiator Coolant Level	✓	
Pod-Style Eccentric Weight Housings	✓		S-O-S SM Sampling Valves: Engine Oil, Hydraulic Oil and Coolant	✓	
Auto-vibe Function	✓		Lug Tread Tires	✓	
Dual Adjustable Steel Scrapers	✓		High Ambient Temperature Oil Factory Fill		✓
			Additional External Rear View Mirror		✓
			Upgraded LED Light Package		✓
			Amber Rotating Beacon		✓

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2022 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

QEHQ2933-01 (01-2022)
Build Number 01A
LRC

