



326

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacity	2
Standards	2
Sound Performance	2
Operating Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Working Ranges and Forces	6
Bucket Specifications and Compatibility – China	7
Bucket Specifications and Compatibility – Hong Kong, Taiwan	8
Attachments Offering Guide – China	9
Attachments Offering Guide – Hong Kong, Taiwan	9
Standard and Optional Equipment	10
Dealer Installed Kits and Attachments	12
Cab Options	13

326 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C7.1	
Net Power – ISO 9249	158 kW	212 hp
Engine Power – ISO 14396	159 kW	213 hp
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.0 L	428 in ³
Biodiesel Capability	Up to B20 ⁽¹⁾	

- The C7.1 engine meets U.S. EPA Tier 2/EU Stage II equivalent or Tier 3/Stage IIIA equivalent and China Nonroad Stage III emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 1,900 rpm.

⁽¹⁾Cat engines are compatible with the following renewable, alternative, and bio-fuels* with lower greenhouse gas emission impact:

- ✓ Up to B20 biodiesel (FAME)**
- ✓ Up to 100% HVO and GTL renewable fuels

*Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

** For use of blends up to B100, consult your Cat dealer.

Swing Mechanism

Swing Speed	9.8 rpm	
Maximum Swing Torque	106 kN·m	78,180 lbf·ft

Weights

Operating Weight	25 700 kg	56,600 lb
------------------	-----------	-----------

- Long undercarriage, HD Reach boom, HD R2.95 m (9'8") stick, 1.54 m³ (2.01 yd³) GD bucket, 600 mm (24") triple grouser shoes and 4.6 t (10,140 lb) counterweight.

Track

Track Shoes Width	600 mm	24 in
Track Shoes Width	790 mm	31 in
Number of Shoes (each side)	51	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	226 kN	50,807 lbf

Hydraulic System

Main System – Maximum Flow – Implement	481 L/min (241 × 2 pumps)	127 gal/min (64 × 2 pumps)
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Heavy Lift Mode/Auto Dig Boost	38 000 kPa	5,510 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	28 400 kPa	4,118 psi
Boom Cylinder – Bore	135 mm	5 in
Boom Cylinder – Stroke	1305 mm	51 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1660 mm	65 in
Bucket Cylinder – Bore	130 mm	5 in
Bucket Cylinder – Stroke	1156 mm	46 in

Service Refill Capacity

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	11.5 L	3.0 gal
Final Drive (each)	4.5 L	1.2 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank (including suction pipe)	147 L	38.8 gal

Standards

Brakes	ISO 10265:2008
Cab/FOGS (optional)	ISO 10262:1998 Level II
Cab/ROPS	ISO 12117-2:2008

Sound Performance

ISO 6395 (external)	104 dB(A)
ISO 6396 (inside cab)	70 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

326 Hydraulic Excavator Specifications

Operating Weights and Ground Pressures

	600 mm (24")		790 mm (31")		600 mm (24")	
	Triple Grouser Shoes		Triple Grouser Shoes		Double Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Machine Configurations						
Base Frame with Track Rollers and Carrier Rollers						
4.6 t (10,140 lb) Counterweight + Long Undercarriage Base Machine						
HD Reach Boom + HD R2.95CB (9'8") Stick + 1.54 m ³ (2.01 yd ³) GD Bucket	25 600 (56,400)	51 (7.4)	25 700 (56,600)	51 (7.4)	26 400 (58,100)	40 (5.8)
Base Frame with Track Rollers and Carrier Rollers						
7.4 t (16,310 lb) Counterweight + Long Undercarriage Base Machine						
Super Long Reach Boom + SLR7.85A (25'9") Stick + 0.57 m ³ (0.75 yd ³) DC Bucket	28 900 (63,600)	57 (8.3)	29 000 (63,800)	58 (8.4)	29 600 (65,300)	45 (6.5)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

326 Hydraulic Excavator Specifications


Major Component Weights

	kg	lb
Base Machine Weight (with upper frame, long undercarriage, counterweight, boom cylinders – does not include boom, stick, bucket, stick cylinder, bucket cylinders, tracks, fuel tank and operator).		
With 4.6 t (10,140 lb) Counterweight	16 940	37,350
With 7.4 t (16,310 lb) Counterweight	19 720	43,480
Track Shoes:		
600 mm (24") Width, 13 mm (0.51") Thick Double Grouser Track Shoes	3250	7,170
600 mm (24") Width, 12.5 mm (0.49") Thick Triple Grouser Track Shoes	3330	7,340
790 mm (31") Width, 12.5 mm (0.49") Thick Triple Grouser Track Shoes with Step Extension for ISO 2867	4000	8,820
Two Boom Cylinders	460	1,010
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	510	1,120
Counterweights:		
4.6 t (10,140 lb) Counterweight	4600	10,140
7.4 t (16,310 lb) Counterweight	7400	16,310
Undercarriage:		
Long Undercarriage	5020	11,070
Booms (including lines, pins, stick cylinder):		
HD Reach Boom 5.9 m (19'4")	2250	4,960
Super Long Reach Boom 10.2 m (33'6")	3290	7,250
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
HD Reach Stick R2.95CB (9'8")	1470	3,240
Super Long Reach Stick SLR7.85A (25'9")	1690	3,730
Buckets (without linkage, with tips and side-cutters):		
1.54 m ³ (2.01 yd ³) GD CB Linkage	1160	2,560
1.45 m ³ (1.90 yd ³) HD CB Linkage	1250	2,760
1.57 m ³ (2.05 yd ³) HD CB Linkage	1330	2,930
1.60 m ³ (2.09 yd ³) HD CB Linkage	1320	2,910
1.36 m ³ (1.78 yd ³) SD CB Linkage	1200	2,650
1.54 m ³ (2.01 yd ³) SD CB Linkage	1500	3,310
0.57 m ³ (0.75 yd ³) DC A Linkage	390	860
0.74 m ³ (0.97 yd ³) DC A Linkage	460	1,010

326 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.


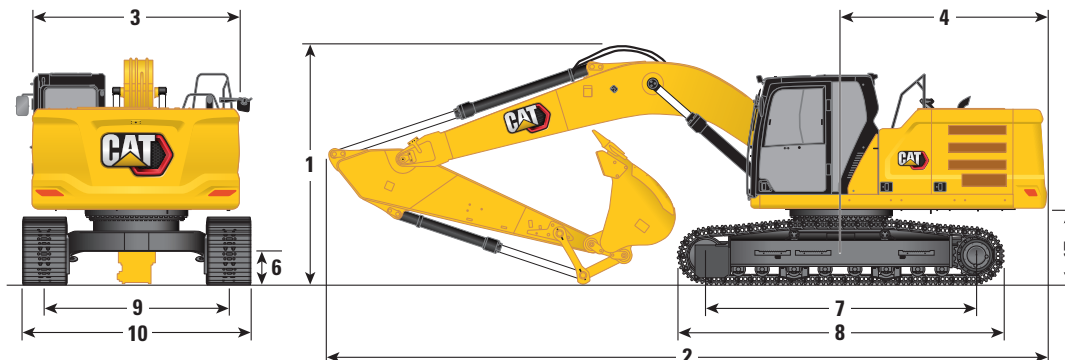


Boom Options	HD Reach Boom 5.9 m (19'4")		SLR Boom 10.2 m (33'6")	
Stick Options	HD Reach Stick R2.95CB (9'8")		SLR Stick 7.85A (25'9")	
1 Machine Height				
Cab Height	3000 mm	9'10"	3000 mm	9'10"
FOGS Height	3140 mm	10'4"	3140 mm	10'4"
Handrails Height	3000 mm	9'10"	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3250 mm	10'8"	3160 mm	10'4"
With Boom/Stick Installed	3120 mm	10'3"	3160 mm	10'4"
With Boom Installed	3000 mm	9'10"	3000 mm	9'10"
2 Machine Length:				
With Boom/Stick/Bucket Installed	10 060 mm	33'0"	14 350 mm	47'1"
With Boom/Stick Installed	10 040 mm	32'11"	14 350 mm	47'1"
With Boom Installed	8720 mm	28'7"	13 250 mm	43'6"
3 Upperframe Width	2940 mm	9'8"	2940 mm	9'8"
4 Tail Swing Radius	3000 mm	9'10"	3000 mm	9'10"
5 Counterweight Clearance	1060 mm	3'6"	1060 mm	3'6"
6 Ground Clearance	440 mm	1'5"	440 mm	1'5"
7 Track Length – Length to Center of Rollers	3830 mm	12'7"	3830 mm	12'7"
8 Crawler Overall Length	4640 mm	15'3"	4640 mm	15'3"
9 Track Gauge				
10 Undercarriage Width:	2590 mm	8'6"	2590 mm	8'6"
With 600 mm (24") Shoes	3190 mm	10'6"	3190 mm	10'6"
With 790 mm (31") Shoes with Steps	3380 mm	11'1"	3380 mm	11'1"
Bucket Type	GD		DC	
Bucket Capacity	1.54 m ³	2.01 yd ³	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1640 mm	5'4"	1070 mm	3'6"

326 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

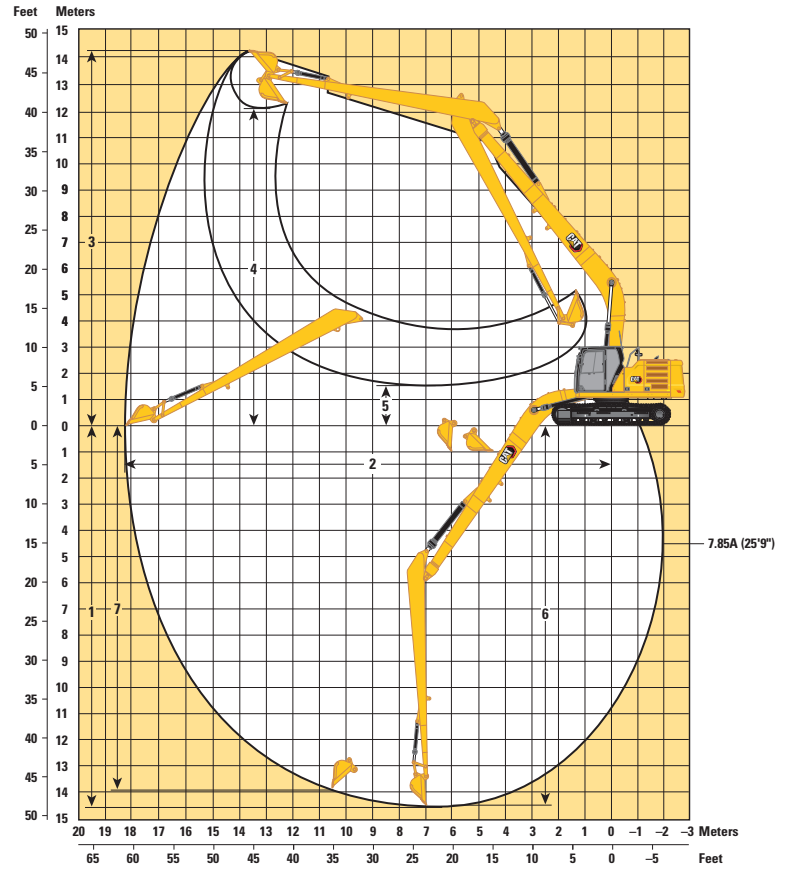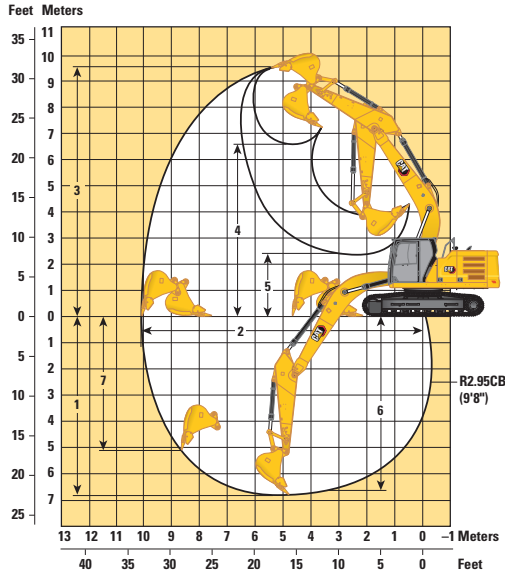

Boom Options

HD Reach Boom
5.9 m (19'4")

SLR Boom
10.2 m (33'6")

Stick Options

HD Reach Stick
R2.95CB (9'8")

SLR Stick
7.85A (25'9")

	HD Reach Boom 5.9 m (19'4")	SLR Boom 10.2 m (33'6")
1 Maximum Digging Depth	6800 mm 22'4"	14 580 mm 47'10"
2 Maximum Reach at Ground Line	10 090 mm 33'1"	18 280 mm 60'0"
3 Maximum Cutting Height	9640 mm 31'8"	14 210 mm 46'7"
4 Maximum Loading Height	6640 mm 21'9"	12 150 mm 39'10"
5 Minimum Loading Height	2410 mm 7'11"	1500 mm 4'11"
6 Maximum Depth Cut for 2240 mm (8'0") Level Bottom	6620 mm 21'9"	14 480 mm 47'6"
7 Maximum Vertical Wall Digging Depth	5120 mm 16'10"	13 980 mm 45'10"
Bucket Digging Force (ISO)*	166 kN 37,320 lbf	61 kN 13,710 lbf
Stick Digging Force (ISO)*	121 kN 27,200 lbf	45 kN 10,120 lbf
Bucket Type	GD	DC
Bucket Capacity	1.54 m ³ 2.01 yd ³	0.57 m ³ 0.75 yd ³
Bucket Tip Radius	1640 mm 5'4"	1070 mm 3'6"

*8.5% Auto Dig Boost pressure not included.

326 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – China

	Linkage	Width		Capacity		Weight		Counterweight	4.6 t (10,140 lb)	7.4 t (16,310 lb)
		mm	in	m ³	yd ³	kg	lb	Fill	HD Reach	SLR
								%	HD R2.95 (9'8")	SLR7.85 (25'9")
Pin-On (No Quick Coupler)										
General Duty	CB	1400	55	1.54	2.02	1125	2,480	100	⊖	
Heavy Duty	CB	1300	51	1.36	1.78	1168	2,575	100	⊙	
	CB	1350	53	1.45	1.90	1189	2,621	100	⊙	
	CB	1450	57	1.57	2.05	1273	2,807	100	⊖	
	CB	1500	60	1.65	2.16	1301	2,869	100	○	
	CB	1500	60	1.76	2.30	1348	2,972	100	○	
	CB	1450	58	1.60	2.09	1269	2,797	100	⊖	
	CB	1650	67	1.90	2.48	1364	3,007	100	○	
Severe Duty	CB	1750	69	2.00	2.61	1392	3,068	100	○	
	CB	1300	51	1.36	1.78	1310	2,888	90	⊙	
	CB	1350	54	1.45	1.90	1335	2,943	90	⊙	
Ditch Cleaning	312, A	1200	48	0.57	0.74	364	803	100		◇
	312, A	1500	60	0.74	0.97	455	1,003	100		X
								kg	3718	1044
Maximum load with pin-on (payload + bucket)								lb	8,197	2,302
With Cat Pin Grabber Coupler										
General Duty	CB	1400	55	1.54	2.02	1125	2480	100	○	
Heavy Duty	CB	1300	51	1.36	1.78	1168	2575	100	⊖	
	CB	1350	53	1.45	1.90	1189	2621	100	○	
	CB	1450	57	1.57	2.05	1273	2807	100	○	
	CB	1500	60	1.65	2.16	1301	2869	100	○	
	CB	1500	60	1.76	2.30	1348	2972	100	◇	
	CB	1450	58	1.60	2.09	1269	2797	100	○	
	CB	1650	67	1.90	2.48	1364	3007	100	◇	
Severe Duty	CB	1750	69	2.00	2.61	1392	3068	100	◇	
	CB	1300	51	1.36	1.78	1310	2888	90	⊖	
	CB	1350	54	1.45	1.90	1335	2943	90	⊖	
CB	1400	56	1.54	2.02	1408	3104	90	○		
								kg	3192	518
Maximum load with coupler (payload + bucket)								lb	7,037	1,141

Maximum Material Density:

- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

326 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Hong Kong, Taiwan

	Linkage	Width		Capacity		Weight		Counterweight	4.6 t (10,140 lb)	7.4 t (16,310 lb)
		mm	in	m ³	yd ³	kg	lb	Fill	HD Reach	SLR
								%	HD R2.95 (9'8")	SLR7.85 (25'9")
Pin-On (No Quick Coupler)										
General Duty	CB	1400	55	1.54	2.01	1072	2,363	100	⊙	
Heavy Duty	CB	1450	58	1.60	2.09	1269	2,797	100	⊖	
	CB	1250	49	1.33	1.74	1153	2,541	100	⊙	
	CB	1400	55	1.54	2.02	1256	2,770	100	⊖	
	CB	1500	60	1.76	2.30	1378	3,038	100	○	
Ditch Cleaning	312, A	1200	48	0.57	0.74	364	803	100		◇
	312, A	1500	60	0.74	0.97	455	1,003	100		X
								kg	3718	1044
								lb	8,197	2,302
With Cat Pin Grabber Coupler										
General Duty	CB	1400	55	1.54	2.01	1072	2,480	100	○	
Heavy Duty	CB	1450	58	1.60	2.09	1269	2,797	100	○	
	CB	1250	49	1.33	1.74	1153	2,541	100	⊖	
	CB	1400	55	1.54	2.02	1256	2,770	100	○	
	CB	1500	60	1.76	2.30	1378	3,038	100	◇	
								kg	3192	518
								lb	7,037	1,141

Maximum Material Density:

- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

326 Hydraulic Excavator Specifications

Attachments Offering Guide – China

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

PIN-ON ATTACHMENTS

Counterweight		4.6 t (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H140	✓
Compactors (Vibratory Plate)	CVP110	✓

Attachments Offering Guide – Hong Kong, Taiwan

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

PIN-ON ATTACHMENTS

Counterweight		4.6 t (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H120 GC	✓
	H120 GC S	✓
	H130 GC	✓
	H130 GC S	✓

326 Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			ELECTRICAL SYSTEM		
5.9 m (19'4") HD Reach boom	✓		Maintenance-free 1,000 CCA batteries	✓	
10.2 m (33'6") Super Long Reach boom		✓ ¹	Centralized electrical disconnect switch	✓	
2.95 m (9'8") HD Reach stick, CB1 linkage	✓		Programmable time-delay working lights	✓	
7.85 m (25'9") Super Long Reach stick, A linkage		✓ ¹	Chassis, boom and cab lights	✓	
Bucket linkage, CB1 type with lifting eye	✓ ²		Premium surround lighting package		✓
Bucket linkage, CB1 type without lifting eye	✓ ¹		ENGINE		
Bucket linkage, A type without lifting eye, super long reach		✓ ¹	Three selectable modes: Power, Smart, Eco	✓	
Bucket linkage, A type without lifting eye, super long reach, Cat Grade		✓ ¹	4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓	
CAT TECHNOLOGY			Electric cooling fans with auto-reverse function	✓	
Cat Product Link™	✓		Auto engine speed control	✓	
Work tool recognition*	✓		Auto engine idle shutdown	✓	
Work tool tracking*	✓		Electric fuel priming pump	✓	
Laser catcher		✓	52° C (125° F) high-ambient cooling capacity	✓	
Cat Grade Connectivity		✓	-18° C (0° F) cold start capability	✓	
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓		-32° C (-25° F) cold start capability		✓ ¹
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓		Double element air filter with integrated pre-cleaner	✓	
Cat Grade with 2D and offset memory**	✓		2 × 115 Amp dual alternator	✓	
Cat Grade with Advanced 2D		✓	Two-stage fuel filtration system with water separator and indicator	✓	
Cat Grade with 3D		✓			
Cat Assist**	✓				
– Grade Assist					
– Boom Assist					
– Bucket Assist					
– Swing Assist					
– Lift Assist***					
Cat Payload***	✓				
– Static weigh					
– Semiautomatic calibration					
– Payload/cycle information					
– USB reporting capability					
2D E-Fence**	✓				
– E-ceiling					
– E-floor					
– E-swing					
– E-wall					
– E-cab avoidance					
Auto hammer stop	✓				
Remote Flash and Troubleshoot	✓				

¹China only

(continued on next page)

¹China only

²Hong Kong, Taiwan only

³Standard for Hong Kong; Optional for China

*Requires PL161 attachment locator on work tool and Bluetooth® receiver on machine.

**Optional on machines equipped with a Super Long Reach boom.

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
HYDRAULIC SYSTEM			UNDERCARRIAGE AND STRUCTURES		
Electronic main control valve	✓		Two-piece segmented track guiding guards		✓
Auto Dig Boost***	✓		Full length track guiding guards		✓
Stick regeneration circuit	✓		Swivel guard		✓
Tandem type electronic main pump	✓		Bottom guards		✓
Auto warm up	✓		HD bottom guards		✓
Two-speed travel	✓		Travel motor guards		✓
Boom and stick drift reduction valve	✓		HD travel motor guards		✓
Element type main hydraulic filter	✓		Grease lubricated track	✓	
SAFETY AND SECURITY			4.6 t (10,141 lb) counterweight	✓	
Rear and right-hand-sideview cameras		✓	7.4 t (16,310 lb) counterweight		✓ ¹
Rearview camera and right-side mirror		✓	600 mm (24") triple grouser track shoes		✓
Ground-level engine shutoff switch	✓		600 mm (24") double grouser track shoes		✓
Right-hand handrail and handhold	✓		790 mm (31") triple grouser track shoes		✓
Signaling/warning horn	✓		Tie-down points (ISO 15818 Compliant)	✓	
Service platform with anti-skid plate and countersunk bolts	✓				
Hydraulic lock out lever neutralizes all controls	✓				
Travel alarm		✓ ³			
SERVICE AND MAINTENANCE					
Side entry to service platform	✓				
Remote flash and remote trouble shoot	✓				
Grouped location of engine oil and fuel filters	✓				
Scheduled Oil Sampling S·O·S SM sampling ports	✓				
Ground-level and platform-level dipstick for engine oil	✓				

¹China only

³Standard for Hong Kong; Optional for China

***Not available for Super Long Reach.

326 Dealer Installed Kits and Attachments

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Radial lower wiper for 70/30 with washer
- Right-hand electrical pedal (two-way) for tool control
- Dual exit rear window kit
- Rain protector plus cab light cover (not compatible with FOGS and, full front windshield net/mesh)
- Polycarbonate roof hatch (for comfort cab only)

REMOTE CONTROL

- Remote control kit

GUARDS

- HD swivel guard 16 mm (0.63") thick
- Side rubber bumper guard
- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Cab vandalism guard

ELECTRICAL

- Jump start wiring

OTHER

- Vandalism guard

Cab Options

	Comfort	Deluxe
ROPS, standard sound suppression	●	●
High-resolution 203 mm (8") LCD touch screen monitor	●	●
High-resolution 254 mm (10") LCD touch screen monitor	○	○
Automatic bi-level air conditioner	●	●
Shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Height-adjustable console, three steps with tool	●	X
Height-adjustable console, infinite with no tool	X	●
Fixed left-side console	●	X
Tilt-up left-side console	X	●
Cat stick steer	○	○
Mechanically adjustable seat suspension	●	X
Heated seat with air-adjustable suspension	X	●
51 mm (2") seat belt	●	●
Bluetooth integrated radio with USB ports	●	●
12V DC outlets (×2)	●	●
Document storage	●	●
Cup and bottle holders	●	●
Openable two-piece front window	●	●
Upper radial wiper with washer	●	●
Openable steel hatch	●	X
Openable polycarbonate skylight hatch	X	●
LED dome and lower interior lights	●	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	○
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●

- Standard
- Optional
- X Not available

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2021 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ3374 (11-2021)
Build Number: 07D
(China, Hong Kong, Taiwan)

