



# 326

## Hydraulic Excavator

# Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

## Table of Contents

<b>Specifications</b> .....	<b>2</b>
Engine .....	2
Swing Mechanism .....	2
Weights .....	2
Track .....	2
Drive .....	2
Hydraulic System .....	2
Service Refill Capacity .....	2
Standards .....	2
Sound Performance .....	2
Operating Weights and Ground Pressures .....	3
Major Component Weights .....	4
Dimensions .....	5
Working Ranges and Forces .....	6
Reach Boom Lift Capacities –	
Counterweight: 4.6 mt (10,140 lb) .....	7
Super Long Reach Boom Lift Capacities –	
Counterweight: 7.4 mt (16,310 lb) .....	9
Bucket Specifications and Compatibility .....	15
Attachments Offering Guide .....	16
<b>Standard and Optional Equipment</b> .....	<b>25</b>
<b>Dealer Installed Kits and Attachments</b> .....	<b>27</b>
<b>Cab Options</b> .....	<b>28</b>
<b>326 Environmental Declaration</b> .....	<b>29</b>

# 326 Hydraulic Excavator Specifications

## Engine

Engine Model	Cat® C7.1	
Net Power		
ISO 9249	157.8 kW	212 hp
ISO 9249 (DIN)	215 hp (metric)	
Engine Power		
ISO 14396	159 kW	213 hp
ISO 14396 (DIN)	216 hp (metric)	
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.0 L	428 in <sup>3</sup>
Biodiesel Capability	Up to B20 <sup>(1)</sup>	

- Emits equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 1,900 rpm.

<sup>(1)</sup>Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels\*\* up to:

- ✓ 100% biodiesel FAME (fatty acid methyl ester)\*
- ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

\*For use of blends higher than 20% biodiesel, consult your Cat dealer.

\*\*Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

## Swing Mechanism

Swing Speed	9.8 rpm	
Maximum Swing Torque	106 kN·m	78,180 lbf·ft

## Weights

Operating Weight	26 100 kg	57,500 lb
------------------	-----------	-----------

- Long undercarriage, HD Reach boom, HD R2.95 m (9'7") stick, 1.76 m<sup>3</sup> (2.30 yd<sup>3</sup>) Heavy Duty (HD) bucket, 700 mm (28") triple grouser shoes and 4.6 mt (10,141 lb) counterweight.

## Track

Track Shoes Width	600 mm	24 in
Track Shoes Width	700 mm	28 in
Track Shoes Width	790 mm	31 in
Number of Shoes (each side)	51	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

## Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	226 kN	50,807 lbf

## Hydraulic System

Main System – Maximum Flow – Implement	481 L/min (241 × 2 pumps)	127 gal/min (64 × 2 pumps)
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Heavy Lift Mode/Auto Dig Boost	38 000 kPa	5,510 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	28 400 kPa	4,118 psi
Boom Cylinder – Bore	135 mm	5 in
Boom Cylinder – Stroke	1305 mm	51 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1660 mm	65 in
Bucket Cylinder – Bore	130 mm	5 in
Bucket Cylinder – Stroke	1156 mm	46 in

## Service Refill Capacity

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	11.5 L	3.0 gal
Final Drive (each)	4.5 L	1.2 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank (including suction pipe)	147 L	38.8 gal

## Standards

Brakes	ISO 10265:2008
Cab/Operator Protective Guards (OPG) (optional)	ISO 10262:1998 Level II
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008

## Sound Performance

ISO 6395:2008 (external)	104 dB(A)
ISO 6396:2008 (inside cab)	70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

# 326 Hydraulic Excavator Specifications

## Operating Weights and Ground Pressures

	600 mm (24") Double Grouser Shoes		700 mm (28") Triple Grouser Shoes		790 mm (31") Triple Grouser Shoes	
	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)
<b>Base Machine Configurations</b>						
<b>Base Frame with Track Rollers and Carrier Rollers</b>						
<b>4.6 mt (10,140 lb) Counterweight + Long Undercarriage Base Machine</b>						
HD Reach Boom + HD R2.95CB (9'8") Stick + 1.76 m <sup>3</sup> (2.30 yd <sup>3</sup> ) HD Bucket	25 700 (56,600)	51 (7.4)	26 100 (57,500)	44 (6.4)	26 500 (58,200)	40 (5.8)
HD Reach Boom + HD R2.95CB (9'8") Stick + 1.54 m <sup>3</sup> (2.01 yd <sup>3</sup> ) HD Bucket	25 600 (56,400)	51 (7.4)	26 000 (57,300)	44 (6.4)	26 400 (58,100)	40 (5.8)
<b>Base Frame with Track Rollers and Carrier Rollers</b>						
<b>7.4 mt (16,310 lb) Counterweight + Long Undercarriage Base Machine</b>						
Super Long Reach Boom + SLR7.85A (25'9") Stick + 0.57 m <sup>3</sup> (0.75 yd <sup>3</sup> ) DC Bucket	28 900 (63,600)	57 (8.3)	29 300 (64,500)	50 (7.2)	29 600 (65,300)	45 (6.5)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

# 326 Hydraulic Excavator Specifications


## Major Component Weights

	kg	lb
Base Machine Weight (with 4.6 mt [10,140 lb] counterweight, upper frame, long undercarriage with rollers and two boom cylinders – does not include boom, stick, bucket, stick cylinder, bucket cylinders, tracks, 90% fuel tank and 75 kg [165 lb] operator).	16 940	37,350
Base Machine Weight (with 7.4 mt [16,310 lb] counterweight, upper frame, long undercarriage with rollers and two boom cylinders – does not include boom, stick, bucket, stick cylinder, bucket cylinders, tracks, 90% fuel tank and 75 kg [165 lb] operator).	19 720	43,480
Track Shoes:		
600 mm (24") Width, 13 mm (0.51") Thick Double Grouser Track Shoes	3250	7,170
700 mm (28") Width, 12.5 mm (0.49") Thick Triple Grouser Track Shoes	3670	8,090
790 mm (31") Width, 12.5 mm (0.49") Thick Triple Grouser Track Shoes with Step Extension	4000	8,820
Two Boom Cylinders	460	1,010
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	510	1,120
Counterweights:		
4.6 mt (10,140 lb) Counterweight	4600	10,140
7.4 mt (16,310 lb) Counterweight	7400	16,310
Undercarriage:		
Long Undercarriage	5020	11,070
Booms (including lines, pins, stick cylinder):		
HD Reach Boom 5.9 m (19'4")	2250	4,960
Super Long Reach (SLR) Boom 10.2 m (33'6")	3290	7,250
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
HD Reach Stick R2.95CB (9'8")	1420	3,130
Super Long Reach Stick SLR7.85A (25'9")	1690	3,730
Buckets (without linkage, with tips and side-cutters):		
1.54 m <sup>3</sup> (2.01 yd <sup>3</sup> ) HD CB Linkage	1200	2,650
1.76 m <sup>3</sup> (2.30 yd <sup>3</sup> ) HD CB Linkage	1290	2,840
0.57 m <sup>3</sup> (0.75 yd <sup>3</sup> ) Ditch Cleaning (DC) A Linkage	390	860
0.74 m <sup>3</sup> (0.97 yd <sup>3</sup> ) DC A Linkage	460	1,010
Quick Couplers (QC):		
Pin Grabber QC Quick Coupler with Pins	530	2,650
Pin Grabber QC Quick Coupler without Pins	500	2,430

# 326 Hydraulic Excavator Specifications

## Dimensions

All dimensions are approximate and may vary depending on bucket selection.


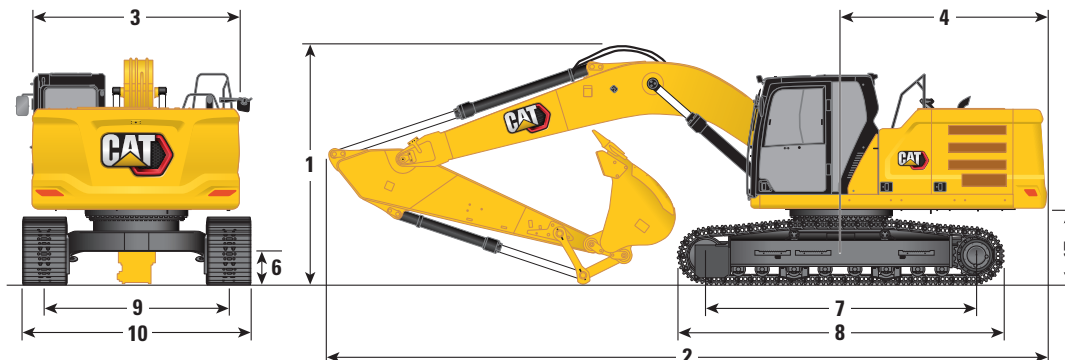


Boom Options	HD Reach Boom 5.9 m (19'4")		SLR Boom 10.2 m (33'6")	
Stick Options	HD Reach Stick R2.95CB (9'8")		SLR Stick 7.85A (25'9")	
<b>1</b> Machine Height				
Cab Height	3000 mm	9'10"	3000 mm	9'10"
Top of GNSS Antenna Height (if installed)	3030 mm	9'11"	3030 mm	9'11"
OPG Height	3140 mm	10'4"	3140 mm	10'4"
Handrail Height	3000 mm	9'10"	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3250 mm	10'8"	3160 mm	10'4"
With Boom/Stick Installed	3120 mm	10'3"	3160 mm	10'4"
With Boom Installed	3000 mm	9'10"	3000 mm	9'10"
<b>2</b> Machine Length:				
With Boom/Stick/Bucket Installed	10 060 mm	33'0"	14 350 mm	47'1"
With Boom/Stick Installed	10 040 mm	32'11"	14 350 mm	47'1"
With Boom Installed	8720 mm	28'7"	13 250 mm	43'6"
<b>3</b> Upperframe Width	2940 mm	9'8"	2940 mm	9'8"
<b>4</b> Tail Swing Radius	3000 mm	9'10"	3000 mm	9'10"
<b>5</b> Counterweight Clearance	1060 mm	3'6"	1060 mm	3'6"
<b>6</b> Ground Clearance	440 mm	1'5"	440 mm	1'5"
<b>7</b> Track Length – Length to Center of Rollers	3830 mm	12'7"	3830 mm	12'7"
<b>8</b> Crawler Overall Length	4640 mm	15'3"	4640 mm	15'3"
<b>9</b> Track Gauge	2590 mm	8'6"	2590 mm	8'6"
<b>10</b> Undercarriage Width:				
With 600 mm (24") Shoes	3190 mm	10'6"	3190 mm	10'6"
With 700 mm (28") Shoes	3290 mm	10'10"	3290 mm	10'10"
With 790 mm (31") Shoes with Steps	3380 mm	11'1"	3380 mm	11'1"
Bucket Type	HD		DC	
Bucket Capacity	1.76 m <sup>3</sup>	2.30 yd <sup>3</sup>	0.57 m <sup>3</sup>	0.75 yd <sup>3</sup>
Bucket Tip Radius	1660 mm	5'5"	1070 mm	3'6"

# 326 Hydraulic Excavator Specifications

## Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

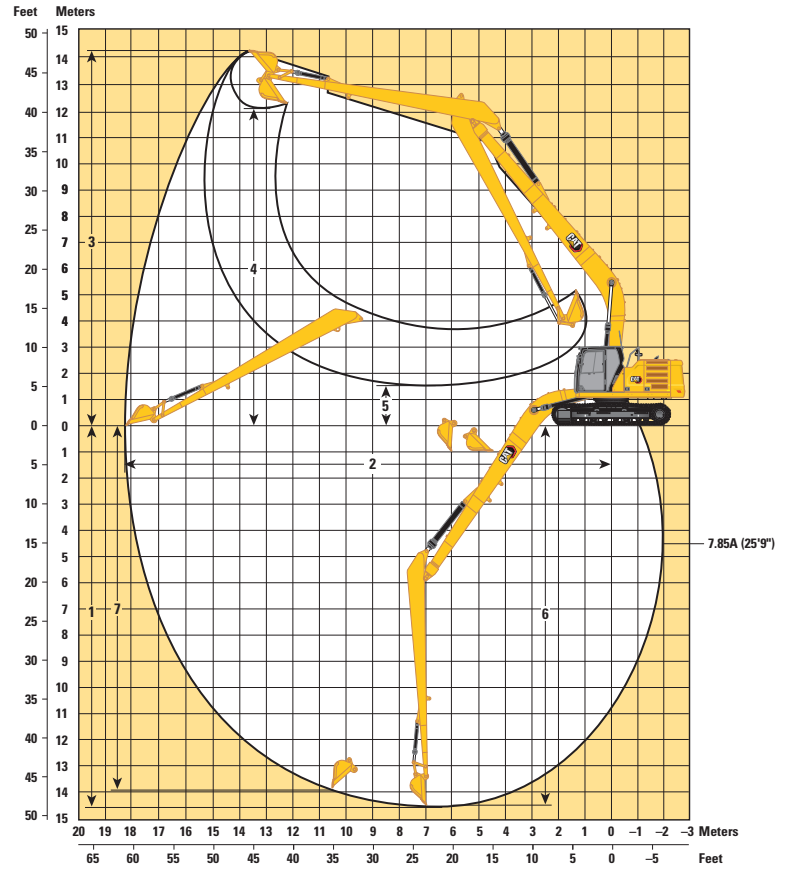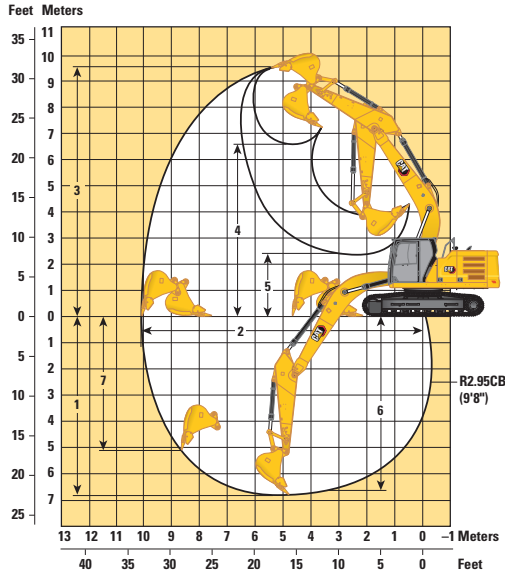

### Boom Options

**HD Reach Boom**  
5.9 m (19'4")

**SLR Boom**  
10.2 m (33'6")

### Stick Options

**HD Reach Stick**  
R2.95CB (9'8")

**SLR Stick**  
7.85A (25'9")



<b>1</b> Maximum Digging Depth	6820 mm	22'5"	14 580 mm	47'10"
<b>2</b> Maximum Reach at Ground Line	10 120 mm	33'2"	18 280 mm	60'0"
<b>3</b> Maximum Cutting Height	9640 mm	31'8"	14 210 mm	46'7"
<b>4</b> Maximum Loading Height	6620 mm	21'9"	12 150 mm	39'10"
<b>5</b> Minimum Loading Height	2390 mm	7'10"	1500 mm	4'11"
<b>6</b> Maximum Depth Cut for 2240 mm (8'0") Level Bottom	6640 mm	21'9"	14 480 mm	47'6"
<b>7</b> Maximum Vertical Wall Digging Depth	5110 mm	16'9"	13 980 mm	45'10"
Bucket Digging Force (ISO)*	166 kN	37,320 lbf	61 kN	13,710 lbf
Stick Digging Force (ISO)*	121 kN	27,200 lbf	45 kN	10,120 lbf
Bucket Type	HD		DC	
Bucket Capacity	1.76 m <sup>3</sup>	2.30 yd <sup>3</sup>	0.57 m <sup>3</sup>	0.75 yd <sup>3</sup>
Bucket Tip Radius	1660 mm	5'5"	1070 mm	3'6"

\*8.5% Auto Dig Boost pressure not included.

# 326 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



Long Undercarriage



Reach Boom	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		3830 mm (12'7") 4640 mm (15'3")		mm ft/in	
	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb		
7500 mm 25'0"					*7050 *14,600	7000 *14,600			*5850 *13,000	*5850 *13,000	6430 20'8"	
6000 mm 20'0"					*7150 *15,650	6950 14,950	*5600	4800	*5550 *12,300	4800 10,650	7510 24'5"	
4500 mm 15'0"			*9350 *20,150	*9350 *20,150	*8000 *17,350	6700 14,450	7050 15,150	4750 10,150	*5550 *12,250	4100 9,050	8180 26'9"	
3000 mm 10'0"			*11 950 *25,750	9800 21,100	*9200 *19,900	6400 13,750	6900 14,800	4600 9,850	5600 12,400	3750 8,250	8540 27'11"	
1500 mm 5'0"			*14 250 *30,750	9150 19,700	9400 20,250	6050 13,050	6700 14,450	4400 9,500	5450 12,000	3600 7,950	8610 28'3"	
0 mm 0 ft/in			14 700 31,450	8800 18,950	9200 19,700	5850 12,600	6600 14,150	4300 9,250	5550 12,250	3650 8,050	8420 27'7"	
-1500 mm -5'0"	kg lb	*11 350 *25,700	*11 350 *25,700	14 550 31,200	8750 18,750	9050 19,500	5750 12,400	6550 14,050	4250 9,150	6050 13,300	3950 8,700	7940 26'0"
-3000 mm -10'0"	kg lb	*18 550 *42,200	17 650 37,700	*14 150 *30,650	8800 18,900	9100 19,600	5800 12,500	6500 14,300	4250 9,150	7100 15,750	4650 10,250	7120 23'2"
-4500 mm -15'0"	kg lb	*15 750 *33,800	*15 750 *33,800	*11 600 *24,700	9050 19,500				*8650 *18,950	6300 14,200	5790 18'8"	

## Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach Boom	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		3830 mm (12'7") 4640 mm (15'3")		mm ft/in	
	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb		
7500 mm 25'0"					*7050 *14,600	*7050 *14,600			*5850 *13,000	*5850 *13,000	6430 20'8"	
6000 mm 20'0"					*7150 *15,650	7050 15,100	*5600	4850	*5550 *12,300	4850 10,800	7510 24'5"	
4500 mm 15'0"			*9350 *20,150	*9350 *20,150	*8000 *17,350	6800 14,600	7150 15,300	4800 10,250	*5550 *12,250	4150 9,150	8180 26'9"	
3000 mm 10'0"			*11 950 *25,750	9900 21,350	*9200 *19,900	6450 13,900	6950 15,000	4650 9,950	5700 12,550	3800 8,350	8540 27'11"	
1500 mm 5'0"			*14 250 *30,750	9250 19,950	9550 20,500	6150 13,250	6800 14,600	4500 9,600	5550 12,150	3650 8,050	8610 28'3"	
0 mm 0 ft/in			14 850 31,850	8900 19,200	9300 19,950	5950 12,750	6650 14,350	4350 9,350	5650 12,400	3700 8,150	8420 27'7"	
-1500 mm -5'0"	kg lb	*11 350 *25,700	*11 350 *25,700	14 750 31,600	8850 19,000	9200 19,750	5850 12,550	6600 14,250	4300 9,300	6100 13,500	4000 8,800	7940 26'0"
-3000 mm -10'0"	kg lb	*18 550 *42,200	17 850 38,150	*14 150 *30,650	8900 19,150	9250 19,850	5850 12,650	6600 14,300	4300 9,300	7200 15,950	4700 10,400	7120 23'2"
-4500 mm -15'0"	kg lb	*15 750 *33,800	*15 750 *33,800	*11 600 *24,700	9150 19,750				*8650 *18,950	6400 14,400	5790 18'8"	



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.












Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach mm ft/in	kg lb	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"				mm ft/in
												
7500 mm 25'0"						*7050 *14,600	6900 *14,600			*5850 *13,000	*5850 *13,000	6430 20'8"
6000 mm 20'0"						*7150 *15,650	6850 14,750	*5600	4700	*5550 *12,300	4700 10,500	7510 24'5"
4500 mm 15'0"				*9350 *20,150	*9350 *20,150	*8000 *17,350	6600 14,250	6950 14,900	4650 10,000	*5550 *12,250	4050 8,900	8180 26'9"
3000 mm 10'0"				*11 950 *25,750	9650 20,800	*9200 *19,900	6300 13,550	6800 14,550	4500 9,700	5550 12,200	3700 8,100	8540 27'11"
1500 mm 5'0"				*14 250 *30,750	9000 19,400	9300 19,950	6000 12,850	6600 14,200	4350 9,350	5350 11,800	3550 7,800	8610 28'3"
0 mm 0 ft/in				14 450 30,950	8650 18,650	9050 19,400	5750 12,400	6450 13,900	4250 9,100	5500 12,050	3600 7,900	8420 27'7"
-1500 mm -5'0"		*11 350 *25,700	*11 350 *25,700	14 350 30,700	8600 18,450	8900 19,150	5650 12,200	6400 13,800	4200 9,000	5950 13,100	3900 8,550	7940 26'0"
-3000 mm -10'0"		*18 550 *42,200	17 350 37,100	*14 150 *30,650	8650 18,600	8950 19,250	5700 12,300			7000 15,500	4550 10,100	7120 23'2"
-4500 mm -15'0"		*15 750 *33,800	*15 750 *33,800	*11 600 *24,700	8900 19,200					*8650 *18,950	6200 14,000	5790 18'8"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.



# 326 Hydraulic Excavator Specifications

## Super Long Reach Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach (mm / ft/in)	kg / lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm / in		
		kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	kg / lb	mm / in
12 000 mm 40'0"	kg / lb											*1300 *2,800	*1300 *2,800	13 940 45'3"
10 500 mm 35'0"	kg / lb											*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"	kg / lb											*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"	kg / lb											*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"	kg / lb											*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"	kg / lb											*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"	kg / lb			*4750	*4750							*1250 *2,750	*1250 *2,750	17 260 56'7"
1500 mm 5'0"	kg / lb			*1500 *3,500	*1500 *3,500	*5400 *12,750	*5400 *12,750	*5600 *12,100	*5600 *12,100	*4350 *9,350	*4350 *9,350	*1350 *2,900	1300 2,800	17 300 56'8"
0 mm 0 ft/in	kg / lb			*1600 *3,550	*1600 *3,550	*3600 *8,200	*3600 *8,200	*6550 *14,100	6150 13,300	*4950 *10,700	4650 10,050	*1400 *3,050	1250 2,750	17 200 56'5"
-1500 mm -5'0"	kg / lb	*1550 *3,400	*1550 *3,400	*2050 *4,600	*2050 *4,600	*3450 *7,800	*3450 *7,800	*6500 *14,900	5650 12,200	*5450 *11,750	4300 9,200	*1500 *3,250	1250 2,750	16 970 55'7"
-3000 mm -10'0"	kg / lb	*2150 *4,700	*2150 *4,700	*2600 *5,850	*2600 *5,850	*3800 *8,550	*3800 *8,550	*6150 *14,050	5400 11,600	*5800 *12,550	4050 8,700	*1600 *3,550	1300 2,800	16 610 54'5"
-4500 mm -15'0"	kg / lb	*2750 *6,050	*2750 *6,050	*3250 *7,250	*3250 *7,250	*4350 *9,800	*4350 *9,800	*6450 *14,700	5250 11,300	*6050 *13,050	3900 8,400	*1800 *3,950	1350 2,950	16 090 52'8"
-6000 mm -20'0"	kg / lb	*3350 *7,500	*3350 *7,500	*3950 *8,800	*3950 *8,800	*5050 *11,350	*5050 *11,350	*7100 *16,200	5250 11,300	*6150 *13,250	3850 8,250	2000 *4,450	1450 3,150	15 410 50'4"
-7500 mm -25'0"	kg / lb	*4050 *9,000	*4050 *9,000	*4700 *10,500	*4700 *10,500	*5900 *13,300	*5900 *13,300	*7700 *16,650	5300 11,400	*6100 *13,150	3850 8,300	*2350 *5,250	1600 3,500	14 540 47'5"
-9000 mm -30'0"	kg / lb	*4750 *10,650	*4750 *10,650	*5550 *12,450	*5550 *12,450	*6900 *15,650	*6900 *15,650	*7400 *15,950	5450 11,750	*5900 *12,700	3950 8,500	*2850 *6,450	1800 4,050	13 450 43'8"
-10 500 mm -35'0"	kg / lb	*5550 *12,450	*5550 *12,450	*6500 *14,700	*6500 *14,700	*8200 *18,600	*8200 *18,600	*6850 *14,650	5650 12,200	*5500 *11,800	4100 8,850	*3100 *6,800	2200 4,950	12 080 39'0"
-12 000 mm -40'0"	kg / lb			*7650 *17,350	*7650 *17,350	*7600 *16,100	*7600 *16,100	*5950 *12,600	*5950 *12,600	*4800 *10,150	4350 9,400	*3250 *7,150	2900 6,600	10 300 32'10"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

# 326 Hydraulic Excavator Specifications

## Super Long Reach Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: On (continued)

Long Undercarriage



Reach	9000 mm/30'0"		10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"		mm in			
	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb		
12 000 mm 40'0"							*1750	*1750					*1300	*1300	13 940	
							*3,000	*3,000					*2,800	*2,800	45'3"	
10 500 mm 35'0"							*1850	*1850					*1250	*1250	14 930	
							*4,100	*4,100					*2,700	*2,700	48'7"	
9000 mm 30'0"							*1900	*1900	*1950	*1950			*1200	*1200	15 720	
							*4,150	*4,150	*3,700	*3,700			*2,650	*2,650	51'4"	
7500 mm 25'0"							*1950	*1950	*1950	*1950			*1200	*1200	16 330	
							*4,250	*4,250	*4,300	*4,300			*2,650	*2,650	53'5"	
6000 mm 20'0"					*4,600	*4,600	*2050	*2050	*2050	2000	*1600	1600	*1200	*1200	16 780	
							*4,500	*4,500	*4,450	4,200			*2,650	*2,650	54'11"	
4500 mm 15'0"					*2300	*2300	*2200	*2200	*2100	1900	*2000	1550	*1250	*1250	17 090	
					*5,000	*5,000	*4,800	*4,800	*4,600	4,050	*3,650	3,250	*2,700	*2,700	56'0"	
3000 mm 10'0"	kg	*3150	*3150	*2800	*2800	*2550	*2550	*2350	2250	1850	*2150	1500	*1250	*1250	17 260	
	lb	*6,750	*6,750	*6,000	*6,000	*5,500	*5,500	*5,100	4,800	*4,850	3,900	*4,350	3,150	*2,750	*2,750	56'7"
1500 mm 5'0"	kg	*3600	*3600	*3100	*3100	*2750	2600	*2550	2100	*2350	1750	*2250	1450	*1350	1300	17 300
	lb	*7,750	*7,750	*6,700	*6,700	*6,000	5,500	*5,500	4,500	*5,150	3,700	*4,700	3,050	*2,900	2,800	56'8"
0 mm 0 ft/in	kg	*4000	3650	*3400	2950	*3000	2400	*2700	2000	*2500	1650	2250	1400	*1400	1250	17 200
	lb	*8,650	7,850	*7,400	6,300	*6,500	5,150	*5,850	4,250	*5,400	3,500	*4,700	2,900	*3,050	2,750	56'5"
-1500 mm -5'0"	kg	*4400	3400	*3700	2750	*3200	2250	*2850	1900	2550	1600	2200	1350	*1500	1250	16 970
	lb	*9,500	7,300	*8,000	5,900	*6,950	4,850	*6,200	4,000	5,500	3,350	*4,100	2,850	*3,250	2,750	55'7"
-3000 mm -10'0"	kg	*4700	3200	*3900	2600	*3400	2150	2950	1800	2500	1550	*1850	1300	*1600	1300	16 610
	lb	*10,100	6,850	*8,500	5,550	*7,350	4,600	6,300	3,850	5,400	3,250			*3,550	2,800	54'5"
-4500 mm -15'0"	kg	*4900	3050	4050	2500	3400	2050	2850	1750	2500	1500			*1800	1350	16 090
	lb	*10,550	6,600	8,700	5,350	7,250	4,450	6,150	3,750	5,300	3,200			*3,950	2,950	52'8"
-6000 mm -20'0"	kg	4950	3000	4000	2450	3350	2050	2850	1700	2500	1500			2000	1450	15 410
	lb	10,650	6,450	8,600	5,250	7,200	4,350	6,100	3,700	*5,150	3,200			*4,450	3,150	50'4"
-7500 mm -25'0"	kg	4950	3000	4000	2450	3350	2050	2850	1750					*2350	1600	14 540
	lb	10,650	6,450	8,600	5,250	7,200	4,350	6,150	3,750					*5,250	3,500	47'5"
-9000 mm -30'0"	kg	*4850	3050	4050	2500	3400	2100							*2850	1800	13 450
	lb	*10,450	6,600	8,750	5,350	7,350	4,500							*6,450	4,050	43'8"
-10 500 mm -35'0"	kg	*4550	3200	*3800	2600	*3100	2200							*3100	2200	12 080
	lb	*9,700	6,900	*8,050	5,600									*6,800	4,950	39'0"
-12 000 mm -40'0"	kg	*3900	3400											*3250	2900	10 300
	lb	*8,200	7,400											*7,150	6,600	32'10"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## Super Long Reach Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	
12 000 mm 40'0"												*1300 *2,800	*1300 *2,800	13 940 45'3"
10 500 mm 35'0"												*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"												*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"												*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"												*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"												*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"				*4750	*4750							*1250 *2,750	*1250 *2,750	17 260 56'7"
1500 mm 5'0"				*1500 *3,500	*1500 *3,500	*5400 *12,750	*5400 *12,750	*5600 *12,100	*5600 *12,100	*4350 *9,350	*4350 *9,350	*1350 *2,900	1300 2,850	17 300 56'8"
0 mm 0 ft/in				*1600 *3,550	*1600 *3,550	*3600 *8,200	*3600 *8,200	*6550 *14,100	6250 13,450	*4950 *10,700	4700 10,150	*1400 *3,050	1300 2,800	17 200 56'5"
-1500 mm -5'0"		*1550 *3,400	*1550 *3,400	*2050 *4,600	*2050 *4,600	*3450 *7,800	*3450 *7,800	*6500 *14,900	5750 12,400	*5450 *11,750	4350 9,350	*1500 *3,250	1300 2,800	16 970 55'7"
-3000 mm -10'0"		*2150 *4,700	*2150 *4,700	*2600 *5,850	*2600 *5,850	*3800 *8,550	*3800 *8,550	*6150 *14,050	5450 11,750	*5800 *12,550	4100 8,800	*1600 *3,550	1300 2,850	16 610 54'5"
-4500 mm -15'0"		*2750 *6,050	*2750 *6,050	*3250 *7,250	*3250 *7,250	*4350 *9,800	*4350 *9,800	*6450 *14,700	5350 11,500	*6050 *13,050	3950 8,500	*1800 *3,950	1350 3,000	16 090 52'8"
-6000 mm -20'0"		*3350 *7,500	*3350 *7,500	*3950 *8,800	*3950 *8,800	*5050 *11,350	*5050 *11,350	*7100 *16,200	5300 11,450	*6150 *13,250	3900 8,400	*2000 *4,450	1450 3,200	15 410 50'4"
-7500 mm -25'0"		*4050 *9,000	*4050 *9,000	*4700 *10,500	*4700 *10,500	*5900 *13,300	*5900 *13,300	*7700 *16,650	5400 11,600	*6100 *13,150	3900 8,450	*2350 *5,250	1600 3,550	14 540 47'5"
-9000 mm -30'0"		*4750 *10,650	*4750 *10,650	*5550 *12,450	*5550 *12,450	*6900 *15,650	*6900 *15,650	*7400 *15,950	5500 11,900	*5900 *12,700	4000 8,600	*2850 *6,450	1850 4,100	13 450 43'8"
-10 500 mm -35'0"		*5550 *12,450	*5550 *12,450	*6500 *14,700	*6500 *14,700	*8200 *18,600	*8200 *18,600	*6850 *14,650	5750 12,400	*5500 *11,800	4150 9,000	*3100 *6,800	2250 5,000	12 080 39'0"
-12 000 mm -40'0"				*7650 *17,350	*7650 *17,350	*7600 *16,100	*7600 *16,100	*5950 *12,600	*5950 *12,600	*4800 *10,150	4400 9,550	*3250 *7,150	2900 6,700	10 300 32'10"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

# 326 Hydraulic Excavator Specifications

## Super Long Reach Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: On (continued)

Long Undercarriage



Reach mm ft/in	kg lb	9000 mm/30'0"		10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	
12 000 mm 40'0"	kg lb							*1750 *3,000	*1750 *3,000					*1300 *2,800	*1300 *2,800	13 940 45'3"
10 500 mm 35'0"	kg lb							*1850 *4,100	*1850 *4,100					*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"	kg lb							*1900 *4,150	*1900 *4,150	*1950 *3,700	*1950 *3,700			*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"	kg lb							*1950 *4,250	*1950 *4,250	*1950 *4,300	*1950 *4,300			*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"	kg lb					*4,600 *4,600		*2050 *4,500	*2050 *4,500	*2050 *4,450	2000 4,250	*1600 *1600		*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"	kg lb					*2300 *5,000	*2300 *5,000	*2200 *4,800	*2200 *4,800	*2100 *4,600	1950 4,100	*2000 *3,650	1550 3,300	*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"	kg lb	*3150 *6,750	*3150 *6,750	*2800 *6,000	*2800 *6,000	*2550 *5,500	*2550 *5,500	*2350 *5,100	2250 4,850	*2250 *4,850	1850 3,950	*2150 *4,350	1500 3,200	*1250 *2,750	*1250 *2,750	17 260 56'7"
1500 mm 5'0"	kg lb	*3600 *7,750	*3600 *7,750	*3100 *6,700	*3100 *6,700	*2750 *6,000	2600 5,600	*2550 *5,500	2150 4,550	*2350 *5,150	1750 3,750	*2250 *4,700	1450 3,100	*1350 *2,900	1300 2,850	17 300 56'8"
0 mm 0 ft/in	kg lb	*4000 *8,650	3700 7,950	*3400 *7,400	3000 6,400	*3000 *6,500	2450 5,250	*2700 *5,850	2000 4,300	*2500 *5,400	1700 3,550	2300 *4,700	1400 2,950	*1400 *3,050	1300 2,800	17 200 56'5"
-1500 mm -5'0"	kg lb	*4400 *9,500	3450 7,400	*3700 *8,000	2800 5,950	*3200 *6,950	2300 4,900	*2850 *6,200	1900 4,100	2600 5,600	1600 3,400	*1850 *4,150	1350 2,900	*1500 *3,250	1300 2,800	16 970 55'7"
-3000 mm -10'0"	kg lb	*4700 *10,100	3250 6,950	*3900 *8,500	2650 5,650	*3400 *7,350	2200 4,650	2950 6,350	1850 3,900	2550 5,450	1550 3,300	*1850 *3,300	1350	*1600 *3,550	1300 2,850	16 610 54'5"
-4500 mm -15'0"	kg lb	*4900 *10,550	3100 6,700	*4100 *8,850	2550 5,400	3450 7,350	2100 4,500	2900 6,250	1800 3,800	2500 5,400	1500 3,250			*1800 *3,950	1350 3,000	16 090 52'8"
-6000 mm -20'0"	kg lb	*5000 10,750	3050 6,550	4050 8,750	2500 5,300	3400 7,300	2050 4,400	2900 6,200	1750 3,750	2500 *5,150	1500 3,250			*2000 *4,450	1450 3,200	15 410 50'4"
-7500 mm -25'0"	kg lb	*5000 *10,800	3050 6,550	4050 8,750	2450 5,300	3400 7,300	2050 4,450	2900 6,250	1750 3,800					*2350 *5,250	1600 3,550	14 540 47'5"
-9000 mm -30'0"	kg lb	*4850 *10,450	3100 6,700	*4100 *8,750	2500 5,450	3450 *7,400	2100 4,550							*2850 *6,450	1850 4,100	13 450 43'8"
-10 500 mm -35'0"	kg lb	*4550 *9,700	3250 7,000	*3800 *8,050	2650 5,700	*3100	2250							*3100 *6,800	2250 5,000	12 080 39'0"
-12 000 mm -40'0"	kg lb	*3900 *8,200	3450 7,500											*3250 *7,150	2900 6,700	10 300 32'10"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## Super Long Reach Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	
12 000 mm 40'0"												*1300 *2,800	*1300 *2,800	13 940 45'3"
10 500 mm 35'0"												*1250 *2,700	*1250 *2,700	14 930 48'7"
9000 mm 30'0"												*1200 *2,650	*1200 *2,650	15 720 51'4"
7500 mm 25'0"												*1200 *2,650	*1200 *2,650	16 330 53'5"
6000 mm 20'0"												*1200 *2,650	*1200 *2,650	16 780 54'11"
4500 mm 15'0"												*1250 *2,700	*1250 *2,700	17 090 56'0"
3000 mm 10'0"				*4750	*4750							*1250 *2,750	*1250 *2,750	17 260 56'7"
1500 mm 5'0"				*1500 *3,500	*1500 *3,500	*5400 *12,750	*5400 *12,750	*5600 *12,100	*5600 *12,100	*4350 *9,350	*4350 *9,350	*1350 *2,900	1250 2,750	17 300 56'8"
0 mm 0 ft/in				*1600 *3,550	*1600 *3,550	*3600 *8,200	*3600 *8,200	*6550 *14,100	6100 13,100	*4950 *10,700	4600 9,900	*1400 *3,050	1250 2,700	17 200 56'5"
-1500 mm -5'0"		*1550 *3,400	*1550 *3,400	*2050 *4,600	*2050 *4,600	*3450 *7,800	*3450 *7,800	*6500 *14,900	5600 12,000	*5450 *11,750	4200 9,050	*1500 *3,250	1250 2,700	16 970 55'7"
-3000 mm -10'0"		*2150 *4,700	*2150 *4,700	*2600 *5,850	*2600 *5,850	*3800 *8,550	*3800 *8,550	*6150 *14,050	5300 11,400	*5800 *12,550	3950 8,550	*1600 *3,550	1250 2,750	16 610 54'5"
-4500 mm -15'0"		*2750 *6,050	*2750 *6,050	*3250 *7,250	*3250 *7,250	*4350 *9,800	*4350 *9,800	*6450 *14,700	5150 11,100	*6050 *13,050	3850 8,250	*1800 *3,950	1300 2,900	16 090 52'8"
-6000 mm -20'0"		*3350 *7,500	*3350 *7,500	*3950 *8,800	*3950 *8,800	*5050 *11,350	*5050 *11,350	*7100 *16,200	5150 11,050	*6150 *13,250	3750 8,100	*2000 *4,450	1400 3,100	15 410 50'4"
-7500 mm -25'0"		*4050 *9,000	*4050 *9,000	*4700 *10,500	*4700 *10,500	*5900 *13,300	*5900 *13,300	*7700 *16,650	5200 11,200	*6100 *13,150	3800 8,150	*2350 *5,250	1550 3,450	14 540 47'5"
-9000 mm -30'0"		*4750 *10,650	*4750 *10,650	*5550 *12,450	*5550 *12,450	*6900 *15,650	*6900 *15,650	*7400 *15,950	5350 11,550	*5900 *12,700	3900 8,350	*2850 *6,450	1800 3,950	13 450 43'8"
-10 500 mm -35'0"		*5550 *12,450	*5550 *12,450	*6500 *14,700	*6500 *14,700	*8200 *18,600	*8200 *18,600	*6850 *14,650	5550 12,000	*5500 *11,800	4050 8,700	*3100 *6,800	2150 4,850	12 080 39'0"
-12 000 mm -40'0"				*7650 *17,350	*7650 *17,350	*7600 *16,100	*7600 *16,100	*5950 *12,600	5900 *12,600	*4800 *10,150	4250 9,250	*3250 *7,150	2850 6,500	10 300 32'10"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.



(continued on next page)

# 326 Hydraulic Excavator Specifications

## Super Long Reach Boom Lift Capacities – Counterweight: 7.4 mt (16,310 lb) – without Bucket, Heavy Lift: On (continued)

Long Undercarriage



	9000 mm/30'0"		10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"				mm in	
	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb		
12 000 mm 40'0"							*1750 *3,000	*1750 *3,000					*1300 *2,800	*1300 *2,800	13 940 45'3"	
10 500 mm 35'0"							*1850 *4,100	*1850 *4,100					*1250 *2,700	*1250 *2,700	14 930 48'7"	
9000 mm 30'0"							*1900 *4,150	*1900 *4,150	*1950 *3,700	*1950 *3,700			*1200 *2,650	*1200 *2,650	15 720 51'4"	
7500 mm 25'0"							*1950 *4,250	*1950 *4,250	*1950 *4,300	*1950 4,250			*1200 *2,650	*1200 *2,650	16 330 53'5"	
6000 mm 20'0"					*4,600	*4,600	*2050 *4,500	*2050 *4,500	*2050 *4,450	1950 4,150	*1600	1550	*1200 *2,650	*1200 *2,650	16 780 54'11"	
4500 mm 15'0"					*2300 *5,000	*2300 *5,000	*2200 *4,800	*2200 *4,800	*2100 *4,600	1900 4,000	*2000 *3,650	1500 3,200	*1250 *2,700	*1250 *2,700	17 090 56'0"	
3000 mm 10'0"	kg lb	*3150 *6,750	*3150 *6,750	*2800 *6,000	*2800 *6,000	*2550 *5,500	*2550 *5,500	*2350 *5,100	2200 4,700	*2250 *4,850	1800 3,800	*2150 *4,350	1450 3,100	*1250 *2,750	*1250 *2,750	17 260 56'7"
1500 mm 5'0"	kg lb	*3600 *7,750	*3600 *7,750	*3100 *6,700	*3100 *6,700	*2750 *6,000	2550 5,450	*2550 *5,500	2100 4,450	*2350 *5,150	1700 3,650	*2250 *4,700	1400 2,950	*1350 *2,900	1250 2,750	17 300 56'8"
0 mm 0 ft/in	kg lb	*4000 *8,650	3600 7,750	*3400 *7,400	2900 6,200	*3000 *6,500	2350 5,050	*2700 *5,850	1950 4,150	*2500 *5,400	1600 3,450	2200 *4,700	1350 2,850	*1400 *3,050	1250 2,700	17 200 56'5"
-1500 mm -5'0"	kg lb	*4400 *9,500	3350 7,150	*3700 *8,000	2700 5,800	*3200 *6,950	2200 4,750	*2850 *6,200	1850 3,950	2550 5,400	1550 3,300	2150 *4,150	1300 2,750	*1500 *3,250	1250 2,700	16 970 55'7"
-3000 mm -10'0"	kg lb	*4700 *10,100	3150 6,750	*3900 *8,500	2550 5,450	*3400 7,300	2100 4,500	2900 6,150	1750 3,750	2450 5,300	1500 3,200	*1850	1300	*1600 *3,550	1250 2,750	16 610 54'5"
-4500 mm -15'0"	kg lb	*4900 *10,550	3000 6,450	4000 8,550	2450 5,250	3300 7,150	2050 4,350	2800 6,050	1700 3,650	2450 5,200	1450 3,100			*1800 *3,950	1300 2,900	16 090 52'8"
-6000 mm -20'0"	kg lb	4850 10,450	2950 6,350	3950 8,450	2400 5,150	3300 7,050	2000 4,250	2800 6,000	1700 3,600	2450 *5,150	1450 3,150			*2000 *4,450	1400 3,100	15 410 50'4"
-7500 mm -25'0"	kg lb	4850 10,450	2950 6,350	3950 8,450	2400 5,150	3300 7,050	2000 4,300	2800 6,050	1700 3,650					*2350 *5,250	1550 3,450	14 540 47'5"
-9000 mm -30'0"	kg lb	*4850 *10,450	3000 6,450	4000 8,600	2450 5,250	3350 7,200	2050 4,400							*2850 *6,450	1800 3,950	13 450 43'8"
-10 500 mm -35'0"	kg lb	*4550 *9,700	3150 6,750	*3800 *8,050	2550 5,500	*3100	2150							*3100 *6,800	2150 4,850	12 080 39'0"
-12 000 mm -40'0"	kg lb	*3900 *8,200	3350 7,250											*3250 *7,150	2850 6,500	10 300 32'10"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 326 Hydraulic Excavator Specifications

## Bucket Specifications and Compatibility

									4.6 mt (10,140 lb)	7.4 mt (16,310 lb)	
									Counterweight	HD Reach	SLR
	Linkage	Width		Capacity		Weight		Fill	HD R2.95 (9'8")	SLR7.85 (25'9")	
		mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	%			
<b>Pin-On (No Quick Coupler)</b>											
Heavy Duty	CB	1350	54	1.54	2.02	1142	2,518	100	⊖		
	CB	1500	60	1.76	2.30	1240	2,733	100	⊖		
Ditch Cleaning	312, A	1200	48	0.57	0.74	364	803	100		◇	
	312, A	1500	60	0.74	0.97	455	1,003	100		◇	
Maximum load with pin-on (payload + bucket)									kg	3966	1044
									lb	8,744	2,302

**Maximum Material Density:**

⊖ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)

◇ 900 kg/m<sup>3</sup> (1,500 lb/yd<sup>3</sup>)

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

### PIN-ON ATTACHMENTS

Counterweight		4.6 mt (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H120 GC	✓
	H120 GC Side Mount	✓
	H120 GC S	✓
	H120 S	✓
	H130 GC	✓
	H130 GC Side Mount	✓
	H130 GC S	✓
	H130 S	✓
	H140 S	✓
	Multi-Processors	MP318 Concrete Cutter Jaw
MP318 Demolition Jaw		✓
MP318 Pulverizer Jaw		✓
MP318 Shear Jaw		✓
MP318 Universal Jaw		✓
MP324 Concrete Cutter Jaw		✓
MP324 Demolition Jaw		✓
MP324 Pulverizer Jaw		✓
MP324 Shear Jaw		✓
MP324 Tank Shear Jaw		✓
MP324 Universal Jaw		✓
Demolition and Sorting Grapples		G324
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓
Pulverizers	P218 Secondary Pulverizer	✓
	P224 Secondary Pulverizer	✓
	P318 Primary Pulverizer	✓
	P324 Primary Pulverizer	✓
Compactors (Vibratory Plate)	CVP110	✓
Mulchers	HM4015	✓
	HM4815	✓
	HM5515	✓
	HM6015	✓
Rotary Cutters	RC20	✓
	RC30	✓

(continued on next page)



# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		4.6 mt (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H120 GC	✓
	H120 GC Side Mount	✓
	H120 GC S	✓
	H120 S	✓
	H130 GC	✓*
	H130 GC Side Mount	✓
	H130 GC S	✓
	H130 S	✓
	H140 S	✓
	Multi-Processors	MP318 Concrete Cutter Jaw
MP318 Demolition Jaw		✓
MP318 Pulverizer Jaw		✓
MP318 Shear Jaw		✓
MP318 Universal Jaw		✓
MP324 Concrete Cutter Jaw		✓*
MP324 Demolition Jaw		✓*
MP324 Shear Jaw		✓*
Demolition and Sorting Grapples	G324	✓*
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓
Pulverizers	P218 Secondary Pulverizer	✓
	P318 Primary Pulverizer	✓
Mulchers	HM4015	✓
	HM4815	✓
	HM5515	✓
	HM6015	✓
Compactors (Vibratory Plate)	CVP110	✓
Rotary Cutters	RC20	✓
	RC30	✓

*(continued on next page)*

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### S70 DEDICATED COUPLER ATTACHMENTS

Counterweight		4.6 mt (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H120 GC	✓
	H120 GC S	✓
	H120 S	✓
	H130 S	✓
	H140 S	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓
	MP318 Demolition Jaw	✓
	MP318 Pulverizer Jaw	✓
	MP318 Shear Jaw	✓
	MP318 Universal Jaw	✓
	MP324 Concrete Cutter Jaw	✓
	MP324 Demolition Jaw	✓
	MP324 Pulverizer Jaw	✓*
	MP324 Shear Jaw	✓
	MP324 Tank Shear Jaw	✓
MP324 Universal Jaw	✓	
Demolition and Sorting Grapples	G324	✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓
Pulverizers	P218 Secondary Pulverizer	✓
	P224 Secondary Pulverizer	✓*
	P318 Primary Pulverizer	✓
	P324 Primary Pulverizer	✓*
Compactors (Vibratory Plate)	CVP110	✓
Rotary Cutters	RC20	✓
	RC30	✓

*(continued on next page)*

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### S80 DEDICATED COUPLER ATTACHMENTS

<b>Counterweight</b>		<b>4.6 mt (10,140 lb)</b>
<b>Boom Type</b>		<b>HD Reach</b>
<b>Stick Length</b>		<b>HD R2.95 (9'8")</b>
Hydraulic Hammers	H120 GC	✓
	H120 S	✓
	H130 GC	✓
	H130 GC S	✓
	H130 S	✓
	H140 S	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓
	MP318 Demolition Jaw	✓
	MP318 Pulverizer Jaw	✓
	MP318 Shear Jaw	✓
	MP318 Universal Jaw	✓
	MP324 Concrete Cutter Jaw	✓*
	MP324 Demolition Jaw	✓*
	MP324 Shear Jaw	✓
	MP324 Tank Shear Jaw	✓*
	MP324 Universal Jaw	✓*
Demolition and Sorting Grapples	G324	✓*
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓
Pulverizers	P218 Secondary Pulverizer	✓
	P318 Primary Pulverizer	✓
Compactors (Vibratory Plate)	CVP110	✓
Rotary Cutters	RC20	✓
	RC30	✓

*(continued on next page)*

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### HCS70 DEDICATED COUPLER ATTACHMENTS

<b>Counterweight</b>		<b>4.6 mt (10,140 lb)</b>
<b>Boom Type</b>		<b>HD Reach</b>
<b>Stick Length</b>		<b>HD R2.95 (9'8")</b>
Hydraulic Hammers	H120 GC	✓
	H120 S	✓
	H130 S	✓
	H140 S	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓
	MP318 Demolition Jaw	✓
	MP318 Pulverizer Jaw	✓
	MP318 Shear Jaw	✓
	MP318 Universal Jaw	✓
	MP324 Concrete Cutter Jaw	✓*
	MP324 Demolition Jaw	✓*
	MP324 Shear Jaw	✓
	MP324 Tank Shear Jaw	✓*
	MP324 Universal Jaw	✓*
Demolition and Sorting Grapples	G324	✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓
Pulverizers	P218 Secondary Pulverizer	✓
	P224 Secondary Pulverizer	✓*
	P318 Primary Pulverizer	✓
	P324 Primary Pulverizer	✓*
Compactors (Vibratory Plate)	CVP110	✓
Rotary Cutters	RC20	✓
	RC30	✓

*(continued on next page)*

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### HCS70/55 DEDICATED COUPLER ATTACHMENTS

<b>Counterweight</b>		<b>4.6 mt (10,140 lb)</b>
<b>Boom Type</b>		<b>HD Reach</b>
<b>Stick Length</b>		<b>HD R2.95 (9'8")</b>
Hydraulic Hammers	H120 GC	✓
	H120 S	✓
	H130 S	✓
	H140 S	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓
	MP318 Demolition Jaw	✓
	MP318 Pulverizer Jaw	✓
	MP318 Shear Jaw	✓
	MP318 Universal Jaw	✓
	MP324 Concrete Cutter Jaw	✓*
	MP324 Demolition Jaw	✓*
	MP324 Shear Jaw	✓
	MP324 Tank Shear Jaw	✓*
	MP324 Universal Jaw	✓*
Demolition and Sorting Grapples	G324	✓*
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓
Pulverizers	P218 Secondary Pulverizer	✓
	P318 Primary Pulverizer	✓
Compactors (Vibratory Plate)	CVP110	✓
Rotary Cutters	RC20	✓
	RC30	✓

*(continued on next page)*

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### HCS80 DEDICATED COUPLER ATTACHMENTS

<b>Counterweight</b>		<b>4.6 mt (10,140 lb)</b>
<b>Boom Type</b>		<b>HD Reach</b>
<b>Stick Length</b>		<b>HD R2.95 (9'8")</b>
Hydraulic Hammers	H120 GC	✓
	H120 S	✓
	H130 GC	✓
	H130 S	✓
	H140 S	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓
	MP318 Demolition Jaw	✓
	MP318 Pulverizer Jaw	✓
	MP318 Shear Jaw	✓
	MP318 Universal Jaw	✓
	MP324 Shear Jaw	✓*
Demolition and Sorting Grapples	G324	✓*
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓
Pulverizers	P218 Secondary Pulverizer	✓
	P318 Primary Pulverizer	✓
Compactors (Vibratory Plate)	CVP110	✓
Rotary Cutters	RC20	✓
	RC30	✓

### TRS23 (PIN-ON TOP/S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

<b>Counterweight</b>		<b>4.6 mt (10,140 lb)</b>
<b>Boom Type</b>		<b>HD Reach</b>
<b>Stick Length</b>		<b>HD R2.95 (9'8")</b>
Hydraulic Hammers	H120 GC S	✓
	H120 S	✓
	H130 S	✓
Compactors (Vibratory Plate)	CVP110	✓

**NOTE:** Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

*(continued on next page)*

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### TRS23 (S70 TOP/S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4.6 mt (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H120 GC S	✓
	H120 S	✓
	H130 S	✓
Compactors (Vibratory Plate)	CVP110	✓

**NOTE:** Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

### TRS23 (PIN-ON TOP/S80 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4.6 mt (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H120 S	✓
	H130 S	✓
Compactors (Vibratory Plate)	CVP110	✓

**NOTE:** Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

### TRS23 (S80 TOP/S80 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4.6 mt (10,140 lb)
Boom Type		HD Reach
Stick Length		HD R2.95 (9'8")
Hydraulic Hammers	H120 S	✓
	H130 S	✓*
Compactors (Vibratory Plate)	CVP110	✓

**NOTE:** Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

*(continued on next page)*

# 326 Hydraulic Excavator Specifications

## Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

### TRS23 (HCS70 TOP/HCS70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight	4.6 mt (10,140 lb)	
Boom Type	HD Reach	
Stick Length	HD R2.95 (9'8")	
Hydraulic Hammers	H120 S	✓
	H130 S	✓*
Compactors (Vibratory Plate)	CVP110	✓

**NOTE:** Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

### TRS23 (HCS70/55 TOP/HCS70/55 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight	4.6 mt (10,140 lb)	
Boom Type	HD Reach	
Stick Length	HD R2.95 (9'8")	
Hydraulic Hammers	H120 S	✓
	H130 S	✓*
Compactors (Vibratory Plate)	CVP110	✓

**NOTE:** Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

### TRS23 (HCS80 TOP/HCS80 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight	4.6 mt (10,140 lb)	
Boom Type	HD Reach	
Stick Length	HD R2.95 (9'8")	
Hydraulic Hammers	H120 S	✓*
Compactors (Vibratory Plate)	CVP110	✓

**NOTE:** Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

### BOOM-MOUNT ATTACHMENTS

Counterweight	4.6 mt (10,140 lb)	
Boom Type	HD Reach	
Mobile Scrap and Demolition Shears	S2050	✓
	S3050 Flat Top	✓



## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>BOOMS, STICKS AND LINKAGES</b>			<b>ELECTRICAL SYSTEM</b>		
5.9 m (19'4") HD Reach boom	✓		Maintenance-free 1,000 CCA batteries	✓	
10.2 m (33'6") Super Long Reach boom		✓	Centralized electrical disconnect switch	✓	
2.95 m (9'8") HD Reach stick, CB1 linkage	✓		Programmable time-delay working lights	✓	
7.85 m (25'9") Super Long Reach stick, A linkage		✓	LED chassis, boom and cab lights	✓	
Bucket linkage, CB1 type with lifting eye	✓		Premium surround lighting package		✓
Bucket linkage, A type with lifting eye, super long reach		✓	<b>ENGINE</b>		
Bucket linkage, A type with lifting eye, super long reach, Cat Grade		✓	Cat® C7.1 single turbo diesel engine	✓	
<b>CAT TECHNOLOGY</b>			Three selectable modes: Power, Smart, Eco	✓	
VisionLink®	✓*		4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓	
VisionLink Productivity		✓	Electric cooling fans with auto-reverse function	✓	
Remote Flash	✓		Auto engine speed control	✓	
Remote Troubleshoot	✓		Auto engine idle shutdown	✓	
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓		Electric fuel priming pump	✓	
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓		52° C (125° F) high-ambient cooling capacity	✓	
Cat Grade 2D**	✓		-18° C (0° F) cold start capability		✓
Cat Grade 2D with Attachment Ready Option (ARO)		✓	-32° C (-25° F) cold start capability		✓
Cat Grade 3D single GNSS		✓	Double element air filter with integrated pre-cleaner	✓	
Cat Grade 3D dual GNSS		✓	2 × 115 Amp dual alternator	✓	
Laser catcher		✓	Two-stage fuel filtration system with water separator and indicator	✓	
Cat Assist**	✓		<i>(continued on next page)</i>		
– Grade Assist					
– Boom Assist					
– Bucket Assist					
– Swing Assist					
– Lift Assist					
Cat Payload**	✓				
– Static weigh					
– Semiautomatic calibration					
– Payload/cycle information					
– USB reporting capability					
Work tool recognition (PL161)***		✓			
Work tool tracking (PL161)***		✓			
Cat Tilt Rotator (TRS) Integration		✓			
Operator Coaching		✓			

\*Connect subscription only. Additional subscriptions are available. Contact your Cat dealer for availability

\*\*Optional on machines equipped with a Super Long Reach boom.

\*\*\*Requires PL161 attachment locator on work tool and Bluetooth® receiver on machine.

# 326 Standard and Optional Equipment

## Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>HYDRAULIC SYSTEM</b>			<b>SERVICE AND MAINTENANCE</b>		
Electronic main control valve	✓		Side entry to service platform	✓	
Auto Dig Boost <sup>1</sup>	✓		Grouped location of engine oil and fuel filters	✓	
Auto heavy lift <sup>1</sup>	✓		Scheduled Oil Sampling (S·O·S <sup>SM</sup> ) ports	✓	
Stick regeneration circuit	✓		Ground-level and platform-level dipstick for engine oil	✓	
Hydraulic efficiency monitoring		✓	Integrated vehicle health management system	✓	
Tandem type electronic main pump	✓		<b>UNDERCARRIAGE AND STRUCTURES</b>		
Auto warm up	✓		Two-piece segmented track guiding guards		✓
Two-speed travel	✓		Full length track guiding guards		✓
Boom and stick drift reduction valve	✓		Swivel guard	✓	
Element type main hydraulic filter	✓		Bottom guards		✓
<b>SAFETY AND SECURITY</b>			HD bottom guards		✓
Cat Command remote control		✓	Travel motor guards		✓
2D E-Fence**	✓		HD travel motor guards		✓
– E-ceiling			Grease lubricated track	✓	
– E-floor			4.6 mt (10,140 lb) counterweight	✓	
– E-swing			7.4 mt (16,310 lb) counterweight		✓
– E-wall			700 mm (28") triple grouser track shoes		✓
– E-cab avoidance			790 mm (31") triple grouser track shoes		✓
Auto hammer stop	✓		600 mm (24") double grouser track shoes		✓
Rear and right-hand-sideview cameras		✓	Tie-down points	✓	
Rearview camera and right-side mirror		✓			
Ground-level engine shutoff switch	✓				
Lockable disconnect switch	✓				
Right-hand handrail and handhold	✓				
Signaling/warning horn	✓				
Swing alarm		✓			
Service platform with anti-skid plate and countersunk bolts	✓				
Hydraulic lock out lever neutralizes all controls	✓				
2 × machine ECMs	✓				
Travel alarm	✓				
Inspection lighting		✓			

<sup>1</sup>Not available for Super Long Reach; requires a heavy lift valve.

## Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

---

### CAB

- Lower radial wiper
- Rain protector plus cab light cover)
- Laminated P5A glass front windshield
- Left Hand (LH)/ Right Hand (RH) electrical pedal for tool control
- Armrest kit
- Seat with 4-point seatbelt capability
- Dual exit rear window kit
- 75 mm (3") retractable seat belt

### SAFETY AND SECURITY

- Cat Detect – People Detection
- Cat Command – Remote control kit

### GUARDS

- HD swivel guard 16 mm (0.63") thick
- Side rubber bumper guard
- Operator Protective Guard System (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Cab vandalism guard

### ELECTRICAL

- Jump start wiring

# 326 Cab Options

## Cab Options

	Comfort	Deluxe
ROPS	●	●
High-resolution 203 mm (8") LCD touchscreen monitor	●	●
High-resolution 254 mm (10") LCD touchscreen monitor*	○	○
Auto bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Height-adjustable console, infinite with no tool	X	●
Height-adjustable console, three steps with tool	●	X
Tilt-up left-side console	X	●
Fixed left-side console	●	X
Mechanical-suspension seat	●	X
Heated air-suspension seat	X	●
51 mm (2") seat belt	●	●
Bluetooth integrated radio with USB/Auxiliary ports	●	●
12V DC outlets	●	●
Document storage	●	●
Overhead storage and rear storage with nets	X	●
Beverage holder	●	●
Cup holder	●	●
Openable two-piece front window	●	●
Rear window emergency exit	●	●
Radial wiper with washer	●	●
Openable polycarbonate skylight hatch	X	●
Openable steel hatch	●	X
LED dome light	●	●
Roof sunscreen	X	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	○
Washable floor mat	●	●
Beacon ready	●	●
Auxiliary relay	X	○

\*For use with 360° visibility

● Standard

○ Optional

X Not available

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

## Engine

- The Cat C7.1 engine emits equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
  - Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels\*\* up to:
    - ✓ 100% biodiesel FAME (fatty acid methyl ester)\*
    - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels
- Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.
- \*For use of blends higher than 20% biodiesel, consult your Cat dealer.*
- \*\*Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

## Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.85 kg (1.9 lb) of refrigerant which has a CO<sub>2</sub> equivalent of 1.216 metric tonnes (1.340 tons).

## Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
  - Barium < 0.01%
  - Cadmium < 0.01%
  - Chromium < 0.01%
  - Lead < 0.01%

## Sound Performance

ISO 6395:2008 (external) – 104 dB(A)

ISO 6396:2008 (inside cab) – 70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

## Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

## Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
  - Advanced hydraulic systems balance power and efficiency
  - Smart mode matches machine power to digging requirements automatically
  - Increase operating efficiency up to 45% with standard Cat technologies
  - Cut maintenance costs with extended service intervals
  - Programmable high-efficiency cooling fans run only when needed
  - The latest hydraulic oil filter provides longer life with a 3,000-hour replacement interval

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2023 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

AEXQ3375-03 (10-2023)  
Replaces AEXQ3375-02  
Build Number: 07F  
(S Am [except Brazil, Chile])

