



Cat[®] Hammers

GC Silenced Models

Technical Specifications

Not all attachments are available in all regions. Consult your Cat[®] dealer for specific configurations available in your region.

Table of Contents

Specifications	2
Hydraulic Specifications	3
Dimensions	4
Hammer Tool Specifications	5
Matching	6
312D2.....6 320D2.....11 330F.....20 336 GC.....31 349.....50 M317D2.....68	
312F.....6 320F.....12 330 GC.....20 336.....34 350.....50 M317F.....69	
313D2 GC.....7 320 GC.....12 330.....22 340D2.....38 352F.....51 M318F.....70	
313D2.....7 320.....13 333.....23 340F.....39 352F XE.....51 M320D2.....74	
313D2 LGP.....7 323D2.....14 335F CR.....24 340F UHD.....39 352.....51 M320F.....75	
314F.....8 323F.....14 335.....24 340.....41 352 UHD.....53 M322D2.....78	
315F CR.....8 323.....16 336D2 GC.....25 340 UHD.....47 355.....53 M322F.....83	
316F.....9 325F CR.....17 336D2.....26 345 GC.....48 M314F.....54	
318D2.....9 326D2.....18 336D2 XE.....27 349D2.....48 M315D2.....61	
318F.....10 326F.....18 336F.....27 349F.....49 M315F.....62	
320D2 GC.....10 330D2.....19 336F XE.....29 349F XE.....49 M316F.....64	
Additional Options	86
Autolube	87

Hammer Technical Specifications

Specifications

Model	Part No.	Linkage	Carrier Weight, Minimum		Carrier Weight, Maximum		Operating Weight, Minimum		Operating Weight, Maximum	
			t	lb	t	lb	kg	lb	kg	lb
H110 GC S Top-mount	565-4611	312/313, 315, CW-40, CW-40 S	11	24250.6	16	35273.6	1203	2646.6	1228	2701.6
H115 GC S Top-mount	536-3733	312/313, 315, CW-40, CW-40 S	13	28659.8	18	39682.8	1307	2875.4	1331	2928.2
H115E S Top-mount	355-7065	B, CB	12	26500.0	20	44100.0	1070	2354.0	1460	3212.0
	385-0328	B, CB	12	26500.0	20	44100.0	1070	2354.0	1460	3212.0
H120 GC S Top-mount	536-3734	B, CB, DB, CW-40, CW-40 S	18	39682.8	25	55115.0	1754	3858.8	1785	3927.0
H130 GC S Top-mount	536-3735	CB, DB, CW-45, CW-45 S, CW-40	25	55115.0	32	70547.2	2451	5392.2	2487	5471.4
H140 GC S Top-mount	536-3736	CB, DB, TB, CW-45, CW-45 S	30	66138.0	40	88184.0	2981	6558.2	3134	6894.8
H160 GC S Top-mount	580-6100	CB, DB, TB, UB, CW55, CW55S	33	72700.0	45	99200.0	3090	6810.0	—	—
H180 GC S Top-mount	596-2304	DB, TB, UB, VB, CW45, CW45S, CW55, CW55S	40	88100.0	55	121200.0	3900	8600.0	—	—

Hammer Technical Specifications


Hydraulic Specifications

Model	Part No.	Energy Class		Blows Per Minute		Rated Flow, Minimum		Rated Flow, Maximum		Operating Pressure, Minimum		Operating Pressure, Maximum		Sound Level
		J	ft-lb	Minimum	Maximum	lpm	gpm	lpm	gpm	kPa	psi	kPa	psi	
H110 GC S Top-mount	565-4611	2000	1475	450	650	80	21	100	26	14000	2030	16000	2320	126
H115 GC S Top-mount	536-3733	3000	2212	450	800	90	24	120	32	15000	2175	17000	2465	128
H120 GC S Top-mount	536-3734	4000	2950	400	800	125	33	151	40	16000	2320	18000	2610	130
H130 GC S Top-mount	536-3735	6000	4425	350	700	161	43	191	51	16000	2320	18000	2610	128
H140 GC S Top-mount	536-3736	7500	5531	250	550	181	48	221	58	16000	2320	18000	2610	130
H160 GC S Top-mount	580-6100	10170	7500	200	450	190	50	260	68	15985	2320	18000	2610	126
H180 GC S Top-mount	596-2304	14578	10750	200	400	250	66	300	79	15985	2320	18000	2610	126

Hammer Technical Specifications

Dimensions

GC Silenced

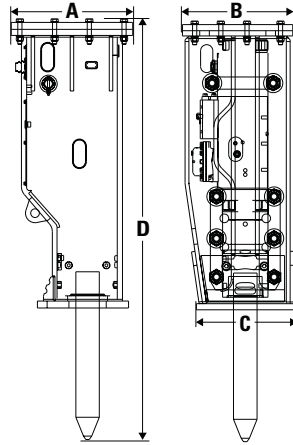

Model	Part No.	(A) Width		(B) Length, Top		(C) Length, Bottom		(D) Height	
		mm	in	mm	in	mm	in	mm	in
H110 GC S Top-mount	565-4611	520	20.5	700	27.6	400	15.7	1475	58.1
H115 GC S Top-mount	536-3733	520	20.5	700	27.6	485	19.1	1445	56.9
H120 GC S Top-mount	536-3734	520	20.5	700	27.6	525	20.7	1605	63.2
H130 GC S Top-mount	536-3735	660	26.0	830	32.7	563	22.2	1795	70.7
H140 GC S Top-mount	536-3736	660	26.0	830	32.7	606	23.9	2025	79.7
H160 GC S Top-mount	580-6100	660	26.0	830	32.7	606	23.9	2042	80.4
H180 GC S Top-mount	596-2304	705	27.8	880	34.6	659	25.9	2394	94.3

Hammer Technical Specifications

Hammer Tool Specifications

Hammer Model	Tool Family	Tool Subfamily	Part No.	Total Length		Working Length		Diameter, Top		Diameter, Bottom		Weight	
				mm	in	mm	in	mm	in	mm	in	kg	lb
H110 GC S	Standard	Blunt	565-4613	950	37.40	550.0	21.65	72.0	2.83	98.0	3.86	52.6	115.98
	Standard	Chisel	565-4615	950	37.40	550.0	21.65	72.0	2.83	98.0	3.86	50.4	111.13
	Standard	Chisel (Forged Tip)	565-4616	950	37.40	550.0	21.65	72.0	2.83	130.0	5.12	50.0	110.25
	Standard	Moil	565-4612	950	37.40	550.0	21.65	72.0	2.83	98.0	3.86	47.6	104.96
	Standard	Pyramidal	565-4614	950	37.40	550.0	21.65	72.0	2.83	98.0	3.86	48.3	106.50
H115 GC S	Standard	Blunt	566-1533	1100	43.31	700.0	27.56	120.0	4.72	120.0	4.72	95.3	210.14
	Standard	Chisel	566-1536	1100	43.31	700.0	27.56	120.0	4.72	120.0	4.72	90.5	199.55
	Standard	Chisel (Forged Tip)	569-4710	1100	43.31	700.0	27.56	120.0	4.72	159.0	6.26	95.1	209.63
	Standard	Moil	566-1535	1100	43.31	700.0	27.56	120.0	4.72	120.0	4.72	85.4	188.31
	Standard	Pyramidal	566-1534	1100	43.31	700.0	27.56	120.0	4.72	120.0	4.72	89.0	196.25
H120 GC S	Standard	Blunt	565-8758	1200	47.24	750.0	29.53	135.0	5.31	135.0	5.31	118.0	260.19
	Standard	Chisel	565-8761	1200	47.24	750.0	29.53	135.0	5.31	135.0	5.31	116.0	255.78
	Standard	Chisel (Forged Tip)	569-4711	1200	47.24	750.0	29.53	135.0	5.31	180.0	5.31	132.0	291.06
	Standard	Moil	565-8760	1200	47.24	750.0	29.53	135.0	5.31	135.0	5.31	116.0	255.78
	Standard	Pyramidal	565-8759	1200	47.24	750.0	29.53	135.0	5.31	135.0	5.31	115.0	253.58
H130 GC S	Standard	Blunt	565-8762	1300	51.18	800.0	31.50	150.0	5.91	150.0	5.91	173.0	381.47
	Standard	Chisel	565-8767	1300	51.18	800.0	31.50	150.0	5.91	150.0	5.91	165.0	363.83
	Standard	Chisel (Forged Tip)	569-4712	1300	51.18	800.0	31.50	150.0	5.91	197.0	5.91	175.0	385.88
	Standard	Moil	565-8766	1300	51.18	800.0	31.50	150.0	5.91	150.0	5.91	165.0	363.83
	Standard	Pyramidal	565-8764	1300	51.18	800.0	31.50	150.0	5.91	150.0	5.91	161.0	355.01
H140 GC S	Standard	Blunt	566-1537	1400	55.12	735.0	28.94	120.0	4.72	153.0	6.02	172.0	379.26
	Standard	Chisel	566-1540	1400	55.12	735.0	28.94	120.0	4.72	153.0	6.02	178.0	392.49
	Standard	Chisel (Forged Tip)	569-4713	1400	55.12	735.0	28.94	120.0	4.72	203.0	6.02	190.0	418.95
	Standard	Moil	566-1539	1400	55.12	735.0	28.94	120.0	4.72	153.0	6.02	176.0	388.08
	Standard	Pyramidal	566-1538	1400	55.12	735.0	28.94	120.0	4.72	153.0	6.02	172.0	379.26
H160GCs	Standard	TOOL-BLUNT	595-1655	1400	55.12	800.0	31.50	118.0	4.64	160.0	6.29	206.0	454.00
	Standard	TOOL-PYRAMIDAL	595-1653	1400	55.12	800.0	31.50	118.0	4.64	160.0	6.29	188.0	414.00
	Standard	TOOL-CHISEL (Forged Tip)	595-1651	1400	55.12	800.0	31.50	118.0	4.64	214.0	8.42	205.0	452.00
	Standard	TOOL-CHISEL	595-1652	1400	55.12	800.0	31.50	118.0	4.64	160.0	6.29	194.0	428.00
	Standard	TOOL-MOIL	595-1654	1400	55.12	800.0	31.50	118.0	4.64	160.0	6.29	189.0	417.00
H180GCs	Standard	TOOL-BLUNT	595-1660	1500	59.05	772.0	30.39	150.0	5.90	180.0	7.09	284.0	626.00
	Standard	TOOL-PYRAMIDAL	595-1658	1500	59.05	772.0	30.39	150.0	5.90	180.0	7.09	263.0	580.00
	Standard	TOOL-CHISEL (Forged Tip)	595-1656	1500	59.05	772.0	30.39	150.0	5.90	241.0	9.49	283.0	624.00
	Standard	TOOL-CHISEL	595-1659	1500	59.05	772.0	30.39	150.0	5.90	180.0	7.09	265.0	584.00
	Standard	TOOL-MOIL	595-1657	1500	59.05	772.0	30.39	150.0	5.90	180.0	7.09	259.0	571.00

Hammer Technical Specifications

Matching – Tracked Excavators

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

312D2

Pin-on

Undercarriage	—		L	
Counterweight	—		—	
Boom Type	Reach		Reach	
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.50 m (8'2")	3.00 m (9'10")
H115 GC S	✓	✓	✓	✓

Cat® Pin Grabber Coupler

Undercarriage	—		L	
Counterweight	—		—	
Boom Type	Reach		Reach	
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.50 m (8'2")	3.00 m (9'10")
H115 GC S	✓		✓	✓*

CW-20 S Dedicated Coupler

Undercarriage	L
Counterweight	—
Boom Type	Reach
Stick Length	2.50 m (8'2")
H115 GC S	✓

312F

Pin-on

Undercarriage	—					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.10 m (6'11")	2.50 m (8'2")	2.80 m (9'2")	3.00 m (9'10")	2.10 m (6'11")	2.50 m (8'2")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.10 m (6'11")	2.50 m (8'2")	2.80 m (9'2")	3.00 m (9'10")	2.10 m (6'11")	2.50 m (8'2")
H115 GC S	✓	✓	✓	✓*		

CW-20 S Dedicated Coupler

Undercarriage	—					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.10 m (6'11")	2.50 m (8'2")	2.80 m (9'2")	3.00 m (9'10")	2.10 m (6'11")	
H115 GC S	✓	✓	✓*			

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

313D2 GC

Pin-on

Undercarriage	—
Counterweight	—
Boom Type	Reach
Stick Length	2.50 m (8'2")
H115 GC S	✓

Cat Pin Grabber Coupler

Undercarriage	—
Counterweight	—
Boom Type	Reach
Stick Length	2.50 m (8'2")
H115 GC S	✓*

313D2

Pin-on

Undercarriage	—	L
Counterweight	—	—
Boom Type	Reach HD	Reach HD
Stick Length	2.50 m HD (8'2")	2.50 m HD (8'2")
H115 GC S	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—	L
Counterweight	—	—
Boom Type	Reach HD	Reach HD
Stick Length	2.50 m HD (8'2")	2.50 m HD (8'2")
H115 GC S	✓	✓

CW-20 S Dedicated Coupler

Undercarriage	L
Counterweight	—
Boom Type	Reach HD
Stick Length	2.50 m HD (8'2")
H115 GC S	✓*

313D2 LGP

Pin-on

Undercarriage	L	
Counterweight	—	
Boom Type	Reach HD	
Stick Length	2.50 m HD (8'2")	3.00 m (9'10")
H115 GC S	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

314F

Pin-on

Undercarriage	L					
Counterweight	—					
Boom Type	Reach					VA
Stick Length	2.10 m (6'11")	2.50 m (8'2")	2.80 m (9'2")	3.00 m (9'10")	3.00 m TR (9'10")	2.50 m (8'2")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L					
Counterweight	—					
Boom Type	Reach					VA
Stick Length	2.10 m (6'11")	2.50 m (8'2")	2.80 m (9'2")	3.00 m (9'10")	3.00 m TR (9'10")	2.50 m (8'2")
H115 GC S		✓	✓	✓	✓*	

CW-20 S Dedicated Coupler

Undercarriage	L		
Counterweight	—		
Boom Type	Reach		VA
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.50 m (8'2")
H115 GC S	✓	✓*	

CW-20 Dedicated Coupler

Undercarriage	L			
Counterweight	—			
Boom Type	Reach			VA
Stick Length	2.10 m (6'11")	2.50 m (8'2")	3.00 m (9'10")	2.50 m (8'2")
H115 GC		✓	✓*	

315F CR

Pin-on

Undercarriage	L				
Counterweight	—				
Boom Type	Reach				VA
Stick Length	2.50 m (8'2")	2.80 m (9'2")	3.00 m (9'10")	3.00 m TR (9'10")	2.10 m (6'11")
H115 GC S	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L				
Counterweight	—				
Boom Type	Reach				VA
Stick Length	2.50 m (8'2")	2.80 m (9'2")	3.00 m (9'10")	3.00 m TR (9'10")	2.10 m (6'11")
H115 GC S	✓	✓	✓	✓*	

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

315F CR *(continued)*

CW-20 S Dedicated Coupler

Undercarriage	L		
Counterweight	—		
Boom Type	Reach		VA
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.10 m (6'11")
H115 GC S		✓*	

316F

Pin-on

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	3.10 m (10'2")	2.25 m (7'5")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	3.10 m (10'2")	2.25 m (7'5")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-30 S Dedicated Coupler

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	2.25 m (7'5")	2.60 m (8'6")	
H115 GC S	✓	✓	✓	✓	✓	

CW-30 Dedicated Coupler

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	2.25 m (7'5")	2.60 m (8'6")	
H115 GC S	✓	✓	✓	✓	✓	

318D2

Pin-on

Undercarriage	L			
Counterweight	—			
Boom Type	Reach		Reach HD	
Stick Length	2.60 m (8'6")	2.90 m (9'6")	2.60 m HD (8'6")	2.90 m (9'6")
H115 GC S	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L			
Counterweight	—			
Boom Type	Reach		Reach HD	
Stick Length	2.60 m (8'6")	2.90 m (9'6")	2.60 m HD (8'6")	2.90 m (9'6")
H115 GC S	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

318D2 (continued)

CW-30 S Dedicated Coupler

Undercarriage	L
Counterweight	—
Boom Type	Reach
Stick Length	2.60 m (8'6")
H115 GC S	✓

CW-30 Dedicated Coupler

Undercarriage	L
Counterweight	—
Boom Type	Reach
Stick Length	2.60 m (8'6")
H115 GC S	✓

318F

Pin-on

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	3.10 m (10'2")	2.25 m (7'5")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	3.10 m (10'2")	2.25 m (7'5")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-30 S Dedicated Coupler

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	3.10 m (10'2")	2.25 m (7'5")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-30 Dedicated Coupler

Undercarriage	L					
Counterweight	—					
Boom Type	Reach				VA	
Stick Length	2.25 m (7'5")	2.60 m (8'6")	2.90 m (9'6")	3.10 m (10'2")	2.25 m (7'5")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

320D2 GC

Pin-on

Undercarriage	—	
Counterweight	—	
Boom Type	Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

320D2 GC *(continued)*

Cat Pin Grabber Coupler

Undercarriage	—	
Counterweight	—	
Boom Type	Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓*

CW-40 S Dedicated Coupler

Undercarriage	—	
Counterweight	—	
Boom Type	Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓

CW-40 Dedicated Coupler

Undercarriage	—	
Counterweight	—	
Boom Type	Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓

320D2

Pin-on

Undercarriage	—		L			
Counterweight	—		—			
Boom Type	Reach HD		ME	Reach HD		ME
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.40 m (7'10")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.40 m (7'10")
H120 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—		L	
Counterweight	—		—	
Boom Type	Reach HD		Reach HD	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓*	✓	✓

CW-40 S Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach HD	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

320D2 (continued)

CW-40 Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach HD	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓

320F

Pin-on

Undercarriage	—		L			
Counterweight	—		—			
Boom Type	Reach	VA	Reach		VA	
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—		L			
Counterweight	—		—			
Boom Type	Reach		Reach		VA	
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓*	✓	✓	✓	✓

CW-40 S Dedicated Coupler

Undercarriage	—		L			
Counterweight	—		—			
Boom Type	Reach	VA	Reach		VA	
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler

Undercarriage	—		L			
Counterweight	—		—			
Boom Type	Reach	VA	Reach		VA	
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓

320 GC

Pin-on

Undercarriage	—		L			
Counterweight	3.7 mt		4.2 mt		4.2 mt	
Boom Type	Reach		Reach		Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—		L			
Counterweight	3.7 mt		4.2 mt		4.2 mt	
Boom Type	Reach		Reach		Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓†	✓†	✓†	✓†	✓†	✓†

(continued on next page)

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

320 GC (continued)

CW-40 S Dedicated Coupler

Undercarriage	—				L	
Counterweight	3.7 mt		4.2 mt		4.2 mt	
Boom Type	Reach		Reach		Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓†	✓†	✓†	✓†	✓†	✓†

CW-40 Dedicated Coupler

Undercarriage	—				L	
Counterweight	3.7 mt		4.2 mt		4.2 mt	
Boom Type	Reach		Reach		Reach	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓†	✓†	✓†	✓†	✓†	✓†

320

Pin-on

Undercarriage	—			
Counterweight	3.7 mt			
Boom Type	Reach		Reach HD	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S				

Pin-on (continued)

Undercarriage	L							
Counterweight	3.7 mt				4.2 mt			
Boom Type	Reach HD		Reach		Reach HD		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—			
Counterweight	3.7 mt			
Boom Type	Reach		Reach HD	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S				

Cat Pin Grabber Coupler (continued)

Undercarriage	L							
Counterweight	3.7 mt				4.2 mt			
Boom Type	Reach HD		Reach		Reach HD		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓	✓†	✓†	✓	✓	✓†	✓†

CW-40 S Dedicated Coupler

Undercarriage	L							
Counterweight	3.7 mt				4.2 mt			
Boom Type	Reach HD		Reach		Reach HD		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓	✓†	✓†	✓	✓	✓†	✓†

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

320 (continued)

CW-40 Dedicated Coupler

Undercarriage	L							
Counterweight	3.7 mt				4.2 mt			
Boom Type	Reach HD		Reach		Reach HD		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓	✓†	✓†	✓	✓	✓†	✓†

323D2

Pin-on

Undercarriage	L			
Counterweight	—			
Boom Type	Reach	Reach HD		ME
Stick Length	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.40 m (7'10")
H120 GC S	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L		
Counterweight	—		
Boom Type	Reach HD		ME
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.40 m (7'10")
H120 GC S	✓	✓	✓

CW-40 S Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach HD	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓

CW-40 Dedicated Coupler

Undercarriage	L		
Counterweight	—		
Boom Type	Reach HD		ME
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.40 m (7'10")
H120 GC S	✓	✓	✓

323F

Pin-on

Undercarriage	L						
Counterweight	—						
Boom Type	Reach		Reach HD			VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.92 m HD (9'7")	2.92 m HD-TR (9'7")	3.86 m HD (12'8")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

323F (continued)

Pin-on (continued)

Undercarriage	L							
Counterweight	5.35 mt				—			
Boom Type	Reach		VA		Reach		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L							
Counterweight	—							
Boom Type	Reach		Reach HD			VA		
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.92 m HD (9'7")	2.92 m HD-TR (9'7")	3.86 m HD (12'8")	2.50 m HD (8'2")	2.92 m HD (9'7")	
H120 GC S	✓	✓	✓	✓	✓	✓	✓	

Cat Pin Grabber Coupler (continued)

Undercarriage	L				LN			
Counterweight	5.35 mt				—			
Boom Type	Reach		VA		Reach		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓*

CW-40 S Dedicated Coupler

Undercarriage	L							
Counterweight	—				5.35 mt			
Boom Type	Reach		VA		Reach		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler (continued)

Undercarriage	LN			
Counterweight	—			
Boom Type	Reach		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓

CW-40 Dedicated Coupler

Undercarriage	L							
Counterweight	—				5.35 mt			
Boom Type	Reach		VA		Reach		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	LN			
Counterweight	—			
Boom Type	Reach		VA	
Stick Length	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

323

Pin-on

Undercarriage	L						
Counterweight	4.2 mt						
Boom Type	Reach			Reach HD			
Stick Length	2.50 m (8'2")	2.92 m (9'7")	3.86 m (12'8")	2.50 m (8'2")	2.50 m HD (8'2")	2.92 m (9'7")	2.92 m HD (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	L				
Counterweight	4.2 mt		5.4 mt		
Boom Type	VA		Reach		
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")	3.86 m (12'8")
H120 GC S	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	L						
Counterweight	5.4 mt						
Boom Type	Reach HD					VA	
Stick Length	2.50 m (8'2")	2.50 m HD (8'2")	2.92 m (9'7")	2.92 m HD (9'7")	2.92 m TR (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L						
Counterweight	4.2 mt						
Boom Type	Reach			Reach HD			
Stick Length	2.50 m (8'2")	2.92 m (9'7")	3.86 m (12'8")	2.50 m (8'2")	2.50 m HD (8'2")	2.92 m (9'7")	2.92 m HD (9'7")
H120 GC S	✓†	✓†	✓†	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	L				
Counterweight	4.2 mt		5.4 mt		
Boom Type	VA		Reach		
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m (8'2")	2.92 m (9'7")	3.86 m (12'8")
H120 GC S	✓†	✓†	✓†	✓†	✓†

Cat Pin Grabber Coupler (continued)

Undercarriage	L						
Counterweight	5.4 mt						
Boom Type	Reach HD					VA	
Stick Length	2.50 m (8'2")	2.50 m HD (8'2")	2.92 m (9'7")	2.92 m HD (9'7")	2.92 m TR (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓	✓	✓	✓	✓	✓†	✓†

CW-40 S Dedicated Coupler

Undercarriage	L					
Counterweight	4.2 mt					
Boom Type	Reach		Reach HD		VA	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓†	✓†	✓	✓	✓†	✓†

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

323 *(continued)*

CW-40 S Dedicated Coupler *(continued)*

Undercarriage	L					
Counterweight	5.4 mt					
Boom Type	Reach		Reach HD		VA	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓†	✓†	✓	✓	✓†	✓†

CW-40 Dedicated Coupler

Undercarriage	L					
Counterweight	4.2 mt					
Boom Type	Reach		Reach HD		VA	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓†	✓†	✓	✓	✓†	✓†

CW-40 Dedicated Coupler *(continued)*

Undercarriage	L					
Counterweight	5.4 mt					
Boom Type	Reach		Reach HD		VA	
Stick Length	2.50 m (8'2")	2.92 m (9'7")	2.50 m HD (8'2")	2.92 m HD (9'7")	2.50 m (8'2")	2.92 m (9'7")
H120 GC S	✓†	✓†	✓	✓	✓†	✓†

325F CR

Pin-on

Undercarriage	L	
Counterweight	—	
Boom Type	Reach	VA
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")
H120 GC S	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach	VA
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")
H120 GC S	✓	✓

CW-40 S Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach	VA
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")
H120 GC S	✓	✓

CW-40 Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach	VA
Stick Length	2.92 m HD (9'7")	2.92 m HD (9'7")
H120 GC S	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

326D2

Pin-on

Undercarriage	L		
Counterweight	—		
Boom Type	Reach		Reach HD
Stick Length	2.50 m (8'2")	2.95 m (9'8")	2.95 m HD (9'8")
H120 GC S	✓	✓	✓
H130 GC S	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L		
Counterweight	—		
Boom Type	Reach		Reach HD
Stick Length	2.50 m (8'2")	2.95 m (9'8")	2.95 m HD (9'8")
H120 GC S	✓	✓	✓
H130 GC S	✓	✓	✓

CW-40 Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach	Reach HD
Stick Length	2.50 m (8'2")	2.95 m HD (9'8")
H120 GC S	✓	✓
H130 GC S	✓	✓

326F

Pin-on

Undercarriage	L				
Counterweight	—				
Boom Type	Reach HD			VA	
Stick Length	2.50 m HD (8'2")	2.95 m HD (9'8")	3.60 m HD (11'10")	2.50 m HD (8'2")	2.95 m HD (9'8")
H120 GC S	✓	✓	✓	✓	✓
H130 GC S	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	LN			
Counterweight	—			
Boom Type	Reach HD		VA	
Stick Length	2.50 m HD (8'2")	2.95 m HD (9'8")	2.50 m HD (8'2")	2.95 m HD (9'8")
H120 GC S	✓	✓	✓	✓
H130 GC S	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L				
Counterweight	—				
Boom Type	Reach HD			VA	
Stick Length	2.50 m HD (8'2")	2.95 m HD (9'8")	3.60 m HD (11'10")	2.50 m HD (8'2")	2.95 m HD (9'8")
H120 GC S	✓	✓	✓	✓	✓
H130 GC S	✓	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

326F (continued)

Cat Pin Grabber Coupler (continued)

Undercarriage	LN			
Counterweight	—			
Boom Type	Reach HD		VA	
Stick Length	2.50 m HD (8'2")	2.95 m HD (9'8")	2.50 m HD (8'2")	2.95 m HD (9'8")
H120 GC S	✓	✓	✓	✓
H130 GC S	✓	✓	✓	✓*

CW-40 Dedicated Coupler

Undercarriage	L				LN			
Counterweight	—				—			
Boom Type	Reach HD		VA		Reach HD		VA	
Stick Length	2.50 m HD (8'2")	2.95 m HD (9'8")	2.50 m HD (8'2")	2.95 m HD (9'8")	2.50 m HD (8'2")	2.95 m HD (9'8")	2.50 m HD (8'2")	2.95 m HD (9'8")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H130 GC S	✓	✓	✓	✓	✓	✓	✓	✓

330D2

Pin-on

Undercarriage	L			
Counterweight	—			
Boom Type	Reach	Reach HD		ME
Stick Length	2.65 m (8'8")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓
H140 GC S	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L			
Counterweight	—			
Boom Type	Reach	Reach HD		ME
Stick Length	2.65 m (8'8")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓
H140 GC S	✓	✓*		✓
H160 GC S	✓	✓	✓*	✓

CW-45 S Dedicated Coupler

Undercarriage	L			
Counterweight	—			
Boom Type	Reach	Reach HD		ME
Stick Length	2.65 m (8'8")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓
H140 GC S	✓*	✓*		✓

CW-45 Dedicated Coupler

Undercarriage	L			
Counterweight	—			
Boom Type	Reach	Reach HD		ME
Stick Length	2.65 m (8'8")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓
H140 GC S	✓	✓*		✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

330F

Pin-on

Undercarriage	L				LN	
Counterweight	—				—	
Boom Type	Reach ES	Reach HD			Reach HD	
Stick Length	3.20 m ES (10'6")	2.65 m HD (8'8")	3.20 m HD (10'6")	3.75 m HD (12'4")	2.65 m HD (8'8")	3.20 m HD (10'6")
H130 GC S	✓	✓	✓	✓	✓	✓
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L			LN	
Counterweight	—			—	
Boom Type	Reach HD			Reach HD	
Stick Length	2.65 m HD (8'8")	3.20 m HD (10'6")	3.75 m HD (12'4")	2.65 m HD (8'8")	3.20 m HD (10'6")
H130 GC S	✓	✓	✓	✓	✓
H140 GC S	✓	✓*		✓*	
H160 GC S	✓	✓		✓	✓

CW-45 S Dedicated Coupler

Undercarriage	L		LN	
Counterweight	—		—	
Boom Type	Reach HD		Reach HD	
Stick Length	2.65 m HD (8'8")	3.20 m HD (10'6")	2.65 m HD (8'8")	3.20 m HD (10'6")
H130 GC S	✓	✓	✓	✓
H140 GC S	✓	✓*	✓*	

CW-45 Dedicated Coupler

Undercarriage	L		LN	
Counterweight	—		—	
Boom Type	Reach HD		Reach HD	
Stick Length	2.65 m HD (8'8")	3.20 m HD (10'6")	2.65 m HD (8'8")	3.20 m HD (10'6")
H130 GC S	✓	✓	✓	✓
H140 GC S	✓	✓*	✓*	

330 GC

Pin-on

Undercarriage	—					
Counterweight	5.8 mt			6.7 mt		
Boom Type	Reach		ME	Reach		ME
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓	✓	✓
H140 GC S	✓	✓*	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

330 GC (continued)

Pin-on (continued)

Undercarriage	L				LN	
Counterweight	6.7 mt				6.7 mt	
Boom Type	Reach			ME	Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	3.75 m (12'4")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓		✓		
H140 GC S	✓	✓		✓		
H160 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—					
Counterweight	5.8 mt			6.7 mt		
Boom Type	Reach		ME	Reach		ME
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓	✓	✓
H140 GC S			✓*	✓		✓
H160 GC S	✓*	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	L				LN	
Counterweight	6.7 mt				6.7 mt	
Boom Type	Reach			ME	Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	3.75 m (12'4")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓				
H140 GC S	✓	✓				
H160 GC S	✓	✓	✓	✓	✓	✓

CW-45 S Dedicated Coupler

Undercarriage	—				
Counterweight	5.8 mt/T3, NR4		6.7 mt/T3, NR4		
Boom Type	Reach	ME	Reach		ME
Stick Length	2.65 m (8'8")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓	✓
H140 GC S			✓*	✓*	
H160 GC S	✓*	✓	✓	✓*	✓

CW-45 S Dedicated Coupler (continued)

Undercarriage	L					LN	
Counterweight	6.7 mt/T3, NR4			6.7 mt/T4F, Stage V		6.7 mt/T4F, Stage V	
Boom Type	Reach		ME	Reach		Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓	✓	✓	✓		
H140 GC S	✓	✓	✓	✓	✓		
H160 GC S	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators *(continued)*

 Match

 * Working Range Front Only

 † Allowed Usage on Machine Less Than 50%

 No Match

330 GC *(continued)*

CW-45 Dedicated Coupler

Undercarriage	—				
Counterweight	5.8 mt/T3, NR4		6.7 mt/T3, NR4		
Boom Type	Reach	ME	Reach		ME
Stick Length	2.65 m (8'8")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")
H130 GC S	✓	✓	✓	✓	✓
H140 GC S			✓*	✓*	
H160 GC S	✓*	✓	✓	✓*	✓

CW-45 Dedicated Coupler *(continued)*

Undercarriage	L				LN		
Counterweight	6.7 mt/T3, NR4		6.7 mt/T4F, Stage V		6.7 mt/T4F, Stage V		
Boom Type	Reach		ME	Reach		Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓	✓	✓	✓		
H140 GC S	✓	✓	✓	✓	✓		
H160 GC S	✓	✓	✓	✓	✓	✓	✓

S-80 Dedicated Coupler

Undercarriage	L		LN	
Counterweight	6.7 mt/T4F, Stage V		6.7 mt/T4F, Stage V	
Boom Type	Reach		Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.65 m (8'8")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓

330

Pin-on

Undercarriage	L						LN	
Counterweight	6.7 mt						6.7 mt	
Boom Type	Reach			Reach HD		ME	Reach	
Stick Length	2.65 m (8'8")	3.75 m (12'4")	3.20 m (10'6")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H140 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L						LN	
Counterweight	6.7 mt						6.7 mt	
Boom Type	Reach			Reach HD		ME	Reach	
Stick Length	2.65 m (8'8")	3.75 m (12'4")	3.20 m (10'6")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H140 GC S	✓		✓	✓	✓*	✓	✓	✓*
H160 GC S	✓	✓		✓	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

330 *(continued)*

CW-45 S Dedicated Coupler

Undercarriage	L				LN		
Counterweight	6.7 mt				6.7 mt		
Boom Type	Reach		Reach HD		ME	Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓	✓	✓	✓	✓	✓
H140 GC S	✓	✓	✓	✓*	✓	✓	
H160 GC S	✓	✓	✓	✓	✓	✓	✓

CW-45 Dedicated Coupler

Undercarriage	L				LN		
Counterweight	6.7 mt				6.7 mt		
Boom Type	Reach		Reach HD		ME	Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.65 m HD (8'8")	3.20 m HD (10'6")	2.50 m (8'2")	2.65 m (8'8")	3.20 m (10'6")
H130 GC S	✓	✓	✓	✓	✓	✓	✓
H140 GC S	✓	✓	✓	✓*	✓	✓	
H160 GC S	✓	✓	✓	✓	✓	✓	✓

S-80 Dedicated Coupler

Undercarriage	L		LN	
Counterweight	6.7 mt/T4F, Stage V		6.7 mt/T4F, Stage V	
Boom Type	Reach		Reach	
Stick Length	2.65 m (8'8")	3.20 m (10'6")	2.65 m (8'8")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓

333

Pin-On

Undercarriage	L	
Counterweight	7.7 mt/T3, NR3	
Boom Type	Reach	
Stick Length	2.80 m (9'2")	3.20 m (10'6")
H160 GC S	✓	✓
H180 GC S	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L	
Counterweight	7.7 mt/T3, NR3	
Boom Type	Reach	
Stick Length	2.80 m (9'2")	3.20 m (10'6")
H160 GC S	✓	✓
H180 GC S	✓*	

CW-45 S Dedicated Coupler

Undercarriage	L	
Counterweight	7.7 mt/T3, NR3	
Boom Type	Reach	
Stick Length	2.80 m (9'2")	3.20 m (10'6")
H160 GC S	✓	✓
H180 GC S	✓*	

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

333 *(continued)*

CW-45 Dedicated Coupler

Undercarriage	L	
Counterweight	7.7 mt/T3, NR3	
Boom Type	Reach	
Stick Length	2.80 m (9'2")	3.20 m (10'6")
H160 GC S	✓	✓
H180 GC S	✓*	

335F CR

Pin-on

Undercarriage	L		
Counterweight	—		
Boom Type	Reach HD		
Stick Length	2.65 m HD (8'8")	3.20 m HD (10'6")	3.75 m HD (12'4")
H130 GC S	✓	✓	✓
H140 GC S	✓	✓	✓
H160 GC S	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L		
Counterweight	—		
Boom Type	Reach HD		
Stick Length	2.65 m HD (8'8")	3.20 m HD (10'6")	3.75 m HD (12'4")
H130 GC S	✓	✓	✓
H140 GC S	✓	✓*	
H160 GC S	✓	✓	

CW-45 S Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach HD	
Stick Length	2.65 m HD (8'8")	3.20 m HD (10'6")
H130 GC S	✓	✓
H140 GC S	✓	

CW-45 Dedicated Coupler

Undercarriage	L	
Counterweight	—	
Boom Type	Reach HD	
Stick Length	2.65 m HD (8'8")	3.20 m HD (10'6")
H130 GC S	✓	✓
H140 GC S	✓	✓*

335

Pin-on

Undercarriage	L		L with Blade (Up)	
Counterweight	7.7 mt/Stage V		5.0 mt/Stage V	
Boom Type	Reach		Reach	
Stick Length	3.20 m (10'6")	3.75 m (12'4")	3.20 m (10'6")	3.75 m (12'4")
H160 GC S	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

335 *(continued)*

Cat Pin Grabber Coupler

Undercarriage	L		L with Blade (Up)
Counterweight	7.7 mt/Stage V		5.0 mt/Stage V
Boom Type	Reach		Reach
Stick Length	3.20 m (10'6")	3.75 m (12'4")	3.20 m (10'6")
H160 GC S	✓	✓	✓

CW-45 S Dedicated Coupler

Undercarriage	L		L with Blade (Up)
Counterweight	7.7 mt/Stage V		5.0 mt/Stage V
Boom Type	Reach		Reach
Stick Length	3.20 m (10'6")	3.75 m (12'4")	3.20 m (10'6")
H160 GC S	✓	✓*	✓*

CW-45 Dedicated Coupler

Undercarriage	L		L with Blade (Up)
Counterweight	7.7 mt/Stage V		5.0 mt/Stage V
Boom Type	Reach		Reach
Stick Length	3.20 m (10'6")	3.75 m (12'4")	3.20 m (10'6")
H160 GC S	✓	✓*	✓*

S-80 Dedicated Coupler

Undercarriage	L		L with Blade (Up)
Counterweight	7.7 mt/Stage V		5.0 mt/Stage V
Boom Type	Reach		Reach
Stick Length	3.20 m (10'6")	3.75 m (12'4")	3.20 m (10'6")
H160 GC S	✓	✓*	✓*

336D2 GC

Pin-on

Undercarriage	—
Counterweight	—
Boom Type	Reach
Stick Length	2.80 m (9'2")
H140 GC S	✓
H160 GC S	✓

Cat Pin Grabber Coupler

Undercarriage	—
Counterweight	—
Boom Type	Reach
Stick Length	2.80 m (9'2")
H140 GC S	✓*
H160 GC S	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336D2 GC (continued)

CW-45 S Dedicated Coupler

Undercarriage	—
Counterweight	—
Boom Type	Reach
Stick Length	2.80 m (9'2")
H140 GC S	✓*

CW-45 Dedicated Coupler

Undercarriage	—
Counterweight	—
Boom Type	Reach
Stick Length	2.80 m (9'2")
H140 GC S	✓*

336D2

Pin-on

Undercarriage	—		L					
Counterweight	—		—					
Boom Type	Reach HD		Reach HD				ME	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.20 m (10'6")	3.90 m (12'10")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H180 GC S							✓	✓

Cat Pin Grabber Coupler

Undercarriage	—		L					
Counterweight	—		—					
Boom Type	Reach HD		Reach HD				ME	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.20 m (10'6")	3.90 m (12'10")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓*	✓*	✓	✓*	✓		✓	✓
H160 GC S			✓	✓*	✓	✓	✓	✓
H180 GC S							✓*	

CW-45 S Dedicated Coupler

Undercarriage	L			
Counterweight	—			
Boom Type	Reach HD		ME	
Stick Length	3.20 m HD (10'6")	3.90 m (12'10")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓*		✓	✓

CW-45 Dedicated Coupler

Undercarriage	L				
Counterweight	—				
Boom Type	Reach HD			ME	
Stick Length	3.20 m HD (10'6")	3.20 m (10'6")	3.90 m (12'10")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓*	✓		✓	✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

336D2 XE

Pin-on

Undercarriage	—	
Counterweight	—	
Boom Type	Reach HD	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")
H140 GC S	✓	✓
H160 GC S	✓	✓
H180 GC S		

Pin-on *(continued)*

Undercarriage	L					
Counterweight	—					
Boom Type	Reach HD				ME	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.20 m (10'6")	3.90 m (12'10")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S					✓	✓

Cat Pin Grabber Coupler

Undercarriage	—		L		
Counterweight	—		—		
Boom Type	Reach HD		Reach HD	ME	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.20 m (10'6")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓*	✓*	✓	✓	✓
H160 GC S			✓	✓	✓
H180 GC S				✓*	

CW-45 Dedicated Coupler

Undercarriage	L		
Counterweight	—		
Boom Type	Reach HD	ME	
Stick Length	3.20 m (10'6")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓	✓	✓

336F

Pin-on

Undercarriage	L			
Counterweight	6.0 mt			
Boom Type	Reach HD			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓
H180 GC S				✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336F (continued)

Pin-on (continued)

Undercarriage	L							
Counterweight	7.0 mt						8.45 mt	
Boom Type	Reach ES		Reach HD			ME	Straight	
Stick Length	3.20 m ES (10'6")	3.90 m ES (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H180 GC S						✓		

Pin-on (continued)

Undercarriage	LN					
Counterweight	7.0 mt				8.45 mt	
Boom Type	Reach HD			ME	Straight	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S				✓		

Cat Pin Grabber Coupler

Undercarriage	L			
Counterweight	6.0 mt			
Boom Type	Reach HD			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓*	✓
H160 GC S	✓	✓	✓	✓
H180 GC S				

Cat Pin Grabber Coupler (continued)

Undercarriage	L							
Counterweight	7.0 mt						8.45 mt	
Boom Type	Reach ES		Reach HD			ME	Straight	
Stick Length	3.20 m ES (10'6")	3.90 m ES (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H180 GC S						✓		

Cat Pin Grabber Coupler (continued)

Undercarriage	LN					
Counterweight	7.0 mt				8.45 mt	
Boom Type	Reach HD			ME	Straight	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓*	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S					✓*	

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336F *(continued)*

CW-45 S Dedicated Coupler

Undercarriage	L					
Counterweight	7.0 mt			8.45 mt		
Boom Type	Reach HD			ME	Straight	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓		

CW-45 S Dedicated Coupler *(continued)*

Undercarriage	LN					
Counterweight	7.0 mt			8.45 mt		
Boom Type	Reach HD			ME	Straight	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓*	✓		

CW-45 Dedicated Coupler

Undercarriage	L					
Counterweight	7.0 mt			8.45 mt		
Boom Type	Reach HD			ME	Straight	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓		

CW-45 Dedicated Coupler *(continued)*

Undercarriage	LN					
Counterweight	7.0 mt			8.45 mt		
Boom Type	Reach HD			ME	Straight	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓		

336F XE

Pin-on

Undercarriage	L			
Counterweight	5.05 mt			
Boom Type	Reach HD			
Stick Length	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓
H180 GC S	✓			

Pin-on *(continued)*

Undercarriage	L					
Counterweight	6.05 mt					
Boom Type	Reach ES		Reach HD			ME
Stick Length	3.20 m ES (10'6")	3.90 m ES (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S						✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336F XE (continued)

Pin-on (continued)

Undercarriage	LN			
Counterweight	6.05 mt			
Boom Type	Reach HD			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓
H180 GC S				✓

Cat Pin Grabber Coupler

Undercarriage	L			
Counterweight	5.05 mt			
Boom Type	Reach HD			
Stick Length	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓*
H160 GC S	✓	✓	✓	✓
H180 GC S				

Cat Pin Grabber Coupler (continued)

Undercarriage	L					
Counterweight	6.05 mt					
Boom Type	Reach ES		Reach HD			ME
Stick Length	3.20 m ES (10'6")	3.90 m ES (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S						✓

Cat Pin Grabber Coupler (continued)

Undercarriage	LN			
Counterweight	6.05 mt			
Boom Type	Reach HD			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓*	✓
H160 GC S	✓	✓	✓	✓
H180 GC S				✓*

CW-45 S Dedicated Coupler

Undercarriage	L				LN			
Counterweight	6.05 mt				6.05 mt			
Boom Type	Reach HD			ME	Reach HD			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓	✓*	✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336F XE *(continued)*

CW-45 Dedicated Coupler

Undercarriage	L				LN			
Counterweight	6.05 mt				6.05 mt			
Boom Type	Reach HD			ME	Reach HD			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓	✓	✓

336 GC

Pin-on

Undercarriage	—			L			LN	
Counterweight	6.8 mt			6.8 mt			6.8 mt	
Boom Type	Reach			Reach			Reach	
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")
H140 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓		✓	✓		✓	✓*

Cat Pin Grabber Coupler

Undercarriage	—			L		
Counterweight	6.8 mt			6.8 mt/T3		
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓				
H160 GC S				✓	✓	✓
H180 GC S				✓*		

Cat Pin Grabber Coupler *(continued)*

Undercarriage	L			
Counterweight	6.8 mt/T3, NR3, NR4			
Boom Type	Reach HD			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S				
H160 GC S	✓	✓	✓*	✓
H180 GC S				

Cat Pin Grabber Coupler *(continued)*

Undercarriage	L				
Counterweight	6.8 mt/T4F, Stage V				
Boom Type	Reach			ME	
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")	2.55 m (8'4")
H140 GC S	✓	✓			
H160 GC S	✓	✓	✓	✓	✓
H180 GC S	✓†*				

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

336 GC (continued)

Cat Pin Grabber Coupler (continued)

Undercarriage	L							
Counterweight	7.5 mt/T3			7.5 mt/T4F, Stage V				
Boom Type	Reach HD	ME	Reach			Reach HD		ME
Stick Length	3.20 m HD (10'6")	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S								
H160 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓*	✓†*	✓†	✓†*		✓*		✓†*

Cat Pin Grabber Coupler (continued)

Undercarriage	LN			
Counterweight	6.8 mt/T4F, Stage V			
Boom Type	Reach			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S	✓	✓*		
H160 GC S	✓	✓	✓*	✓
H180 GC S				

Cat Pin Grabber Coupler (continued)

Undercarriage	LN					
Counterweight	7.5 mt/T4F, Stage V					
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S						
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S	✓†*					

Cat Pin Grabber Coupler (continued)

Undercarriage	LW						
Counterweight	6.8 mt/T3, NR3, NR4						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓*			✓*			✓*

Cat Pin Grabber Coupler (continued)

Undercarriage	LW			
Counterweight	6.8 mt/T3, NR3, NR4			
Boom Type	Reach			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S				
H160 GC S	✓	✓	✓	✓
H180 GC S	✓*			✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

336 GC *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	LW					
Counterweight	7.5 mt/T3, NR3, NR4					
Boom Type	Reach			Reach HD		
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S						
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓*		✓	✓*	

CW-45 S Dedicated Coupler

Undercarriage	—		L		LN	
Counterweight	6.8 mt		6.8 mt		6.8 mt	
Boom Type	Reach		Reach		Reach	
Stick Length	2.80 m (9'2")	3.20 m (10'6")	2.80 m (9'2")	3.20 m (10'6")	2.80 m (9'2")	3.20 m (10'6")
H140 GC S	✓	✓	✓	✓	✓	✓*

CW-45 Dedicated Coupler

Undercarriage	—			L		
Counterweight	6.8 mt/T3			6.8 mt/T3		
Boom Type	Reach		ME	Reach		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	2.55 m (8'4")
H140 GC S	✓	✓		✓	✓	
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S						

CW-45 Dedicated Coupler *(continued)*

Undercarriage	L			LN		
Counterweight	6.8 mt/T4F, Stage V			6.8 mt/T4F, Stage V		
Boom Type	Reach		ME	Reach		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	2.55 m (8'4")
H140 GC S	✓	✓		✓	✓	
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S			✓†*			

S-80 Dedicated Coupler

Undercarriage	—		L		LN	
Counterweight	6.8 mt/T4F, Stage V		6.8 mt/T4F, Stage V		6.8 mt/T4F, Stage V	
Boom Type	Reach		Reach		Reach	
Stick Length	2.80 m (9'2")	3.20 m (10'6")	2.80 m (9'2")	3.20 m (10'6")	2.80 m (9'2")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

336

Pin-on

Undercarriage	L					
Counterweight	6.8 mt					
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓		✓	✓	

Pin-on (continued)

Undercarriage	L						
Counterweight	7.5 mt						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓		✓	✓		✓

Pin-on (continued)

Undercarriage	LN					
Counterweight	7.5 mt					
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓		✓
H180 GC S	✓	✓	✓*	✓		✓

Pin-on (continued)

Undercarriage	LW						
Counterweight	6.8 mt						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓*	✓	✓	✓*	✓

Pin-on (continued)

Undercarriage	LW						
Counterweight	7.5 mt						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336 (continued)

Cat Pin Grabber Coupler

Undercarriage	L					
Counterweight	6.8 mt					
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	L						
Counterweight	7.5 mt						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	LN					
Counterweight	7.5 mt					
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓*	✓	✓*	✓

CW-45 S Dedicated Coupler

Undercarriage	L					
Counterweight	6.8 mt/T3		6.8 mt/T4F, Stage V			
Boom Type	Reach HD	ME	Reach			ME
Stick Length	3.20 m HD (10'6")	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S	✓		✓	✓		
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S		✓†*				

CW-45 S Dedicated Coupler (continued)

Undercarriage	L						
Counterweight	7.5 mt/T3		7.5 mt/T4F, Stage V				
Boom Type	Reach HD	ME	Reach			Reach HD	ME
Stick Length	3.20 m HD (10'6")	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓				✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓*	✓†	✓†	✓†*		✓*	✓†

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

336 (continued)

CW-45 S Dedicated Coupler (continued)

Undercarriage	LN		
Counterweight	6.8 mt/T4F, Stage V		
Boom Type	Reach		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓*
H160 GC S	✓	✓	✓
H180 GC S			

CW-45 S Dedicated Coupler (continued)

Undercarriage	LN					
Counterweight	7.5 mt/T4F, Stage V					
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓*	✓	✓*	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S	✓†*					✓†*

CW-45 S Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	6.8 mt/T3, NR3, NR4						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓*						✓*

CW-45 S Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	7.5 mt/T3, NR3, NR4						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓*		✓	✓*		✓

CW-45 Dedicated Coupler

Undercarriage	L					
Counterweight	6.8 mt/T3		6.8 mt/T4F, Stage V			
Boom Type	Reach HD	ME	Reach			ME
Stick Length	3.20 m HD (10'6")	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S	✓		✓	✓		
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S		✓†*				

(continued on next page)

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336 (continued)

CW-45 Dedicated Coupler (continued)

Undercarriage	L						
Counterweight	7.5 mt/T3			7.5 mt/T4F, Stage V			
Boom Type	Reach HD	ME	Reach			Reach HD	ME
Stick Length	3.20 m HD (10'6")	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓				✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓*	✓†	✓†	✓†*		✓*	✓†

CW-45 Dedicated Coupler (continued)

Undercarriage	LN		
Counterweight	6.8 mt/T4F, Stage V		
Boom Type	Reach		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓*
H160 GC S	✓	✓	✓
H180 GC S			

CW-45 Dedicated Coupler (continued)

Undercarriage	LN					
Counterweight	7.5 mt/T4F, Stage V					
Boom Type	Reach			Reach HD		ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓*	✓	✓*	✓
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S	✓†*					✓†*

CW-45 Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	6.8 mt/T3, NR3, NR4						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓*						✓*

CW-45 Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	7.5 mt/T3, NR3, NR4						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓*		✓	✓*		✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

336 (continued)

S-80 Dedicated Coupler

Undercarriage	L						
Counterweight	6.8 mt/T4F, Stage V			7.5 mt/T4F, Stage V			
Boom Type	Reach			Reach			Reach HD
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓	✓

S-80 Dedicated Coupler (continued)

Undercarriage	LN							
Counterweight	6.8 mt/T4F, Stage V			7.5 mt/T4F, Stage V				
Boom Type	Reach			Reach			Reach HD	
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m HD (10'6")	3.90 m HD (12'10")
H160 GC S	✓	✓	✓*	✓	✓	✓	✓	✓

340D2

Pin-on

Undercarriage	L							
Counterweight	—				8.5 mt			
Boom Type	Reach HD		ME		Reach HD		ME	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓	✓	
H180 GC S			✓	✓			✓	

Cat Pin Grabber Coupler

Undercarriage	L							
Counterweight	—				8.5 mt			
Boom Type	Reach HD		ME		Reach HD		ME	
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")	
H140 GC S	✓	✓	✓	✓	✓	✓	✓	
H160 GC S		✓	✓	✓	✓	✓	✓	
H180 GC S			✓	✓		✓	✓	

CW-45 S Dedicated Coupler

Undercarriage	L						
Counterweight	—			8.5 mt			
Boom Type	Reach HD	ME		Reach HD	ME		
Stick Length	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")	
H140 GC S	✓	✓	✓	✓	✓	✓	

CW-45 Dedicated Coupler

Undercarriage	L						
Counterweight	—			8.5 mt			
Boom Type	Reach HD	ME		Reach HD	ME		
Stick Length	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")	3.20 m HD (10'6")	2.15 m (7'1")	2.55 m (8'4")	
H140 GC S	✓	✓	✓	✓	✓	✓	

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340F

Pin-on

Undercarriage	L		
Counterweight	7.0 mt		
Boom Type	Reach HD		ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓
H160 GC S	✓	✓	✓
H180 GC S			✓

Cat Pin Grabber Coupler

Undercarriage	L		
Counterweight	7.0 mt		
Boom Type	Reach HD		ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓
H160 GC S	✓	✓	✓
H180 GC S			✓

CW-45 S Dedicated Coupler

Undercarriage	L		
Counterweight	7.0 mt		
Boom Type	Reach HD		ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓

CW-45 Dedicated Coupler

Undercarriage	L		
Counterweight	7.0 mt		
Boom Type	Reach HD		ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	2.55 m (8'4")
H140 GC S	✓	✓	✓

340F UHD

Pin-on

Undercarriage	L-FIX					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

340F UHD (continued)

Pin-on (continued)

Undercarriage	L-VG					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L-FIX					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓	✓*	
H160 GC S	✓	✓	✓	✓	✓	✓*

Cat Pin Grabber Coupler (continued)

Undercarriage	L-VG					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓	✓	✓

CW-45 S Dedicated Coupler

Undercarriage	L-FIX					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓		✓	

CW-45 S Dedicated Coupler (continued)

Undercarriage	L-VG					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓		✓	

CW-45 Dedicated Coupler

Undercarriage	L-FIX					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓		✓	

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340F UHD *(continued)*

CW-45 Dedicated Coupler *(continued)*

Undercarriage	L-VG					
Counterweight	8.45 mt					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S	✓	✓	✓		✓	✓

340

Pin-on

Undercarriage	L					
Counterweight	7.5 mt					
Boom Type	Reach			Reach HD		
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S						
H160 GC S	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓	✓	✓*

Pin-on *(continued)*

Undercarriage	L		
Counterweight	7.5 mt	9.0 mt	
Boom Type	ME	Straight	
Stick Length	2.55 m (8'4")	3.20 m (10'6")	3.90 m (12'10")
H140 GC S		✓	✓
H160 GC S	✓	✓	✓
H180 GC S	✓	✓	✓

Pin-on *(continued)*

Undercarriage	LN						
Counterweight	7.5 mt						
Boom Type	ME	Reach			Reach HD		
Stick Length	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	LN	
Counterweight	9.0 mt	
Boom Type	Straight	
Stick Length	3.20 m (10'6")	3.90 m (12'10")
H140 GC S	✓	✓
H160 GC S	✓	✓
H180 GC S	✓	✓*

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340 *(continued)*

Pin-on *(continued)*

Undercarriage	LW			
Counterweight	6.8 mt			
Boom Type	Reach			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S				
H160 GC S	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	LW						
Counterweight	7.5 mt						
Boom Type	Reach HD			Reach HD+			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD+ (9'2")	3.20 m HD+ (10'6")	3.90 m HD+ (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	HD High Wide		
Counterweight	7.5 mt/Stage V		
Boom Type	Reach		ME
Stick Length	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓
H160 GC S	✓	✓	✓
H180 GC S	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L						
Counterweight	7.5 mt						
Boom Type	Reach			ME	Reach HD		
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓*		✓*	✓	✓*	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	L	
Counterweight	9.0 mt	
Boom Type	Straight	
Stick Length	3.20 m (10'6")	3.90 m (12'10")
H140 GC S	✓	✓
H160 GC S	✓	✓
H180 GC S		

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340 *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	LN						
Counterweight	7.5 mt						
Boom Type	ME	Reach			Reach HD		
Stick Length	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S							

Cat Pin Grabber Coupler *(continued)*

Undercarriage	LN	
Counterweight	9.0 mt	
Boom Type	Straight	
Stick Length	3.20 m (10'6")	3.90 m (12'10")
H140 GC S	✓	✓*
H160 GC S	✓	✓
H180 GC S		

Cat Pin Grabber Coupler *(continued)*

Undercarriage	LW			
Counterweight	6.8 mt			
Boom Type	ME	Reach		
Stick Length	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")
H140 GC S				
H160 GC S	✓	✓	✓	✓
H180 GC S	✓*	✓	✓*	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	LW						
Counterweight	7.5 mt						
Boom Type	ME	Reach HD			Reach HD+		
Stick Length	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD+ (9'2")	3.20 m HD+ (10'6")	3.90 m HD+ (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓		✓	✓*	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	LW						
Counterweight	7.5 mt						
Boom Type	ME	Reach			Reach HD		
Stick Length	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓		✓	✓	

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340 (continued)

Cat Pin Grabber Coupler (continued)

Undercarriage	HD High Wide			
Counterweight	7.5 mt			
Boom Type	ME	Reach		
Stick Length	2.55 m (8'4")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")
H140 GC S	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓
H180 GC S	✓†	✓†	✓†	

CW-45 S Dedicated Coupler

Undercarriage	L	
Counterweight	9.0 mt/T4F, Stage V	
Boom Type	Straight	
Stick Length	3.20 m (10'6")	3.90 m (12'10")
H140 GC S		
H160 GC S	✓	✓
H180 GC S		

CW-45 S Dedicated Coupler (continued)

Undercarriage	LN						
Counterweight	7.5 mt/T4F, Stage V						
Boom Type	Reach			ME	Reach HD		
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S				✓*			

CW-45 S Dedicated Coupler (continued)

Undercarriage	LN	
Counterweight	9.0 mt/Stage V	
Boom Type	Straight	
Stick Length	3.20 m (10'6")	3.90 m (12'10")
H140 GC S		
H160 GC S	✓	✓
H180 GC S		

CW-45 S Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	7.5 mt/T3, NR3, NR4						
Boom Type	Reach HD			ME	Reach HD+		
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")	2.80 m HD+ (9'2")	3.20 m HD+ (10'6")	3.90 m HD+ (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓*		✓	✓	✓*	

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340 *(continued)*

CW-45 S Dedicated Coupler *(continued)*

Undercarriage	LW						
Counterweight	7.5 mt/T4F, Stage V						
Boom Type	Reach			ME	Reach HD		
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓		✓	✓	✓	

CW-45 S Dedicated Coupler *(continued)*

Undercarriage	HD High Wide			
Counterweight	7.5 mt/Stage V			
Boom Type	Reach			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓
H180 GC S	✓†	✓†		✓†

CW-45 Dedicated Coupler

Undercarriage	L	
Counterweight	9.0 mt/T4F, Stage V	
Boom Type	Straight	
Stick Length	3.20 m (10'6")	3.90 m (12'10")
H140 GC S		
H160 GC S	✓	✓
H180 GC S		

CW-45 Dedicated Coupler *(continued)*

Undercarriage	LN			
Counterweight	9.0 mt/Stage V		7.5 mt/T4F, Stage V	
Boom Type	Straight		Reach	
Stick Length	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")
H140 GC S				
H160 GC S	✓	✓	✓	✓
H180 GC S			✓*	

CW-45 Dedicated Coupler *(continued)*

Undercarriage	LN				
Counterweight	7.5 mt/T4F, Stage V				
Boom Type	Reach	Reach HD			ME
Stick Length	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S					
H160 GC S	✓	✓	✓	✓	✓
H180 GC S		✓*			✓*

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340 (continued)

CW-45 Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	7.5 mt/T3, NR3, NR4						
Boom Type	Reach HD			Reach HD+			ME
Stick Length	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.80 m HD+ (9'2")	3.20 m HD+ (10'6")	3.90 m HD+ (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓		✓	✓*		✓

CW-45 Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	7.5 mt/T4F, Stage V						
Boom Type	Reach			Reach HD			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	2.55 m (8'4")
H140 GC S							
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓		✓	✓		✓

CW-45 Dedicated Coupler (continued)

Undercarriage	HD High Wide			
Counterweight	7.5 mt/Stage V			
Boom Type	Reach			ME
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.55 m (8'4")
H140 GC S	✓	✓	✓	✓
H160 GC S	✓	✓	✓	✓
H180 GC S	✓†	✓†		✓†

S-80 Dedicated Coupler

Undercarriage	HD High Wide			L	
Counterweight	7.5 mt/Stage V			9.0 mt/T4F, Stage V	
Boom Type	Reach			Straight	
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")	3.90 m (12'10")
H160 GC S	✓	✓	✓	✓	✓

S-80 Dedicated Coupler (continued)

Undercarriage	LN							
Counterweight	7.5 mt/T4F, Stage V						9.0 mt/Stage V	
Boom Type	Reach			Reach HD			Straight	
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	3.20 m (10'6")	3.90 m (12'10")
H160 GC S	✓	✓	✓	✓	✓	✓	✓	✓

S-80 Dedicated Coupler (continued)

Undercarriage	LW						
Counterweight	7.5 mt/T4F, Stage V						
Boom Type	Reach			Reach HD			
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m HD (9'2")	3.20 m HD (10'6")	3.90 m HD (12'10")	
H160 GC S	✓	✓	✓	✓	✓	✓	

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340 UHD

Pin-on

Undercarriage	L						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓	✓*		✓

Pin-on *(continued)*

Undercarriage	H-VG						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓*	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	H-VG						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓	✓

CW-45 S Dedicated Coupler

Undercarriage	L						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓*	✓

CW-45 S Dedicated Coupler *(continued)*

Undercarriage	H-VG						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓	✓

CW-45 Dedicated Coupler

Undercarriage	L						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓*	✓
H180 GC S							✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

340 UHD (continued)

CW-45 Dedicated Coupler (continued)

Undercarriage	H-VG						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	Retrofit (B)			Retrofit (S)			2 PC
Stick Length	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	3.20 m (10'6")
H160 GC S	✓	✓	✓	✓	✓	✓	✓
H180 GC S							✓

S-80 Dedicated Coupler

Undercarriage	L						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	2 PC	Retrofit (B)			Retrofit (S)		
Stick Length	3.20 m (10'6")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")
H160 GC S	✓	✓	✓	✓	✓	✓	✓*

S-80 Dedicated Coupler (continued)

Undercarriage	H-VG						
Counterweight	9.0 mt/T4F, Stage V						
Boom Type	2 PC	Retrofit (B)			Retrofit (S)		
Stick Length	3.20 m (10'6")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")	2.80 m (9'2")	3.20 m (10'6")	3.90 m (12'10")
H160 GC S	✓	✓	✓	✓	✓	✓	✓

345 GC

Pin-on

Undercarriage	—			
Counterweight	9.0 mt/T3, NR4			
Boom Type	Reach HD		ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	2.50 m (8'2")	3.00 m (9'10")
H160 GC S	✓	✓	✓	✓
H180 GC S	✓	✓	✓	✓

CW-55 Dedicated Coupler

Undercarriage	—			
Counterweight	9.0 mt/T3, NR4			
Boom Type	Reach HD		ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	2.50 m (8'2")	3.00 m (9'10")
H160 GC S	✓	✓	✓	✓
H180 GC S	✓	✓*	✓	✓*

349D2

Pin-on

Undercarriage	—				
Counterweight	—				
Boom Type	Reach HD			ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

349D2 (continued)

Pin-on (continued)

Undercarriage	L-FIX				
Counterweight	—				
Boom Type	Reach HD			ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	—				L-FIX			
Counterweight	—				—			
Boom Type	Reach HD		ME		Reach HD		ME	
Stick Length	3.35 m HD (11'0")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓	✓	✓	✓

349F

Pin-on

Undercarriage	L-FIX				
Counterweight	—				
Boom Type	Long-Reach	Reach HD		ME	
Stick Length	4.30 m HD (14'1")	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L-FIX			
Counterweight	—			
Boom Type	Reach HD		ME	
Stick Length	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓

349F XE

Pin-on

Undercarriage	L-FIX				
Counterweight	—				
Boom Type	Long-Reach	Reach HD		ME	
Stick Length	4.30 m HD (14'1")	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L-FIX			
Counterweight	—			
Boom Type	Reach HD		ME	
Stick Length	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

349

Pin-on

Undercarriage	L				
Counterweight	9.0 mt/T3				
Boom Type	Reach HD			ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	L					
Counterweight	9.0 mt/T4F, Stage V					
Boom Type	Long-Reach	Reach HD			ME	
Stick Length	4.30 m HD (14'1")	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L			
Counterweight	9.0 mt/T3			
Boom Type	Reach HD		ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	L				
Counterweight	9.0 mt/T4F, Stage V				
Boom Type	Reach HD			ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓

CW-55 Dedicated Coupler

Undercarriage	L			
Counterweight	9.0 mt/T3			
Boom Type	Reach HD		ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓

350

Pin-on

Undercarriage	L			
Counterweight	9.0 mt/NR3, NR4			
Boom Type	Reach HD		ME	
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

352F

Pin-on

Undercarriage	L-VG					
Counterweight	—					
Boom Type	Long-Reach	Reach HD			ME	
Stick Length	4.30 m HD (14'1")	2.90 m HD (9'6")	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L-VG					
Counterweight	—					
Boom Type	Reach HD			ME		
Stick Length	2.90 m HD (9'6")	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")	
H180 GC S	✓	✓	✓	✓	✓	

352F XE

Pin-on

Undercarriage	L-VG					
Counterweight	—					
Boom Type	Long-Reach	Reach HD			ME	
Stick Length	4.30 m HD (14'1")	2.90 m HD (9'6")	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")
H180 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L-VG					
Counterweight	—					
Boom Type	Reach HD			ME		
Stick Length	2.90 m HD (9'6")	3.40 m HD (11'2")	3.90 m HD (12'10")	2.50 m (8'2")	3.00 m (9'10")	
H180 GC S	✓	✓	✓	✓	✓	

352

Pin-on

Undercarriage	L				
Counterweight	9.8 mt/T3, NR3, NR4				
Boom Type	ME		ME HD		
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.50 m HD (8'2")	3.00 m (9'10") HD	
H180 GC S	✓	✓	✓	✓	

Pin-on *(continued)*

Undercarriage	L				
Counterweight	9.8 mt/T3, NR3, NR4				
Boom Type	Reach			Reach HD	
Stick Length	2.90 m (9'6")	3.35 m (11'0")	3.90 m (12'10")	2.90 m HD (9'6")	3.35 m HD (11'0")
H180 GC S	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	L					
Counterweight	9.8 mt/T4F, Stage V					
Boom Type	Long-Reach	ME		Reach		
Stick Length	4.30 m (14'1")	2.50 m (8'2")	3.00 m (9'10")	2.90 m (9'6")	3.35 m (11'0")	3.90 m (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

352 *(continued)*

Pin-on *(continued)*

Undercarriage	L-VG					
Counterweight	9.0 mt/T4F, Stage V					
Boom Type	Long-Reach	ME		Reach HD		
Stick Length	4.30 m HD (14'1")	2.50 m (8'2")	3.00 m (9'10")	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	L-VG					
Counterweight	9.8 mt/T4F, Stage V					
Boom Type	Long-Reach	ME		Reach		
Stick Length	4.30 m (14'1")	2.50 m (8'2")	3.00 m (9'10")	2.90 m (9'6")	3.35 m (11'0")	3.90 m (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	L					
Counterweight	9.8 mt/T3, NR3, NR4					
Boom Type	ME		Reach			
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.90 m (9'6")	3.35 m (11'0")	3.90 m (12'10")	
H180 GC S	✓	✓	✓	✓	✓	

352 *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	L					
Counterweight	9.8 mt/T3, NR3, NR4					
Boom Type	Long-Reach	ME		Reach		
Stick Length	4.30 m (14'1")	2.50 m (8'2")	3.00 m (9'10")	2.90 m (9'6")	3.35 m (11'0")	3.90 m (12'10")
H180 GC S	✓*	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	L-VG					
Counterweight	9.0 mt/T4F, Stage V					
Boom Type	Long-Reach	ME		Reach HD		
Stick Length	4.30 m HD (14'1")	2.50 m (8'2")	3.00 m (9'10")	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	L-VG					
Counterweight	9.8 mt/T4F, Stage V					
Boom Type	Long-Reach	ME		Reach		
Stick Length	4.30 m (14'1")	2.50 m (8'2")	3.00 m (9'10")	2.90 m (9'6")	3.35 m (11'0")	3.90 m (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Tracked Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

352 *(continued)*

CW-55 Dedicated Coupler

Undercarriage	L				
Counterweight	9.8 mt/T3, NR3, NR4				
Boom Type	ME		Reach		
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.90 m (9'6")	3.35 m (11'0")	3.90 m (12'10")
H180 GC S	✓	✓	✓	✓	✓

CW-55 Dedicated Coupler *(continued)*

Undercarriage	L-VG				
Counterweight	9.0 mt/T4F, Stage V				
Boom Type	ME		Reach HD		Long-Reach
Stick Length	2.50 m (8'2")	3.00 m (9'10")	2.90 m HD (9'6")	3.35 m HD (11'0")	4.30 m HD (14'1")
H180 GC S	✓	✓	✓	✓	✓

352 UHD

Pin-on

Undercarriage	H-VG					
Counterweight	12.0 mt/T4F, Stage V					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	H-VG					
Counterweight	12.0 mt/T4F, Stage V					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

CW-55 Dedicated Coupler

Undercarriage	H-VG					
Counterweight	12.0 mt/T4F, Stage V					
Boom Type	Retrofit (B)			Retrofit (S)		
Stick Length	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")	2.90 m HD (9'6")	3.35 m HD (11'0")	3.90 m HD (12'10")
H180 GC S	✓	✓	✓	✓	✓	✓

355

Pin-on

Undercarriage	L			L-VG		
Counterweight	9.8 mt/T3, NR3			9.8 mt/T3, NR3		
Boom Type	ME SD		Reach SD	ME SD		Reach SD
Stick Length	2.50 m SD (8'2")	3.00 m (9'10") SD	2.90 m TR (9'6")	2.50 m SD (8'2")	3.00 m (9'10") SD	2.90 m TR (9'6")
H180 GC S	✓	✓	✓	✓	✓	✓

Hammer Technical Specifications

Matching – Wheeled Excavators

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M314F

Pin-on

Undercarriage	Front and Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M314F *(continued)*

Pin-on *(continued)*

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear Blade					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear Blade		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓*

Pin-on *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear Blade		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front and Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M314F *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front and Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M314F *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade							
Counterweight	2.8 mt							
Boom Type	1 PC (short)			1 PC			VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓*	✓*				

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓*		

CW-20 S Dedicated Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S			

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M314F *(continued)*

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S			

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S			

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S			

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓*	✓*		

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Rear Blade		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S			

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M314F *(continued)*

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓*

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Rear Blade		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC S			

CW-20 Dedicated Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC	✓	✓	✓	✓	✓	✓

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC			

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC	✓	✓	✓	✓	✓	✓

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC			

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M314F *(continued)*

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC			

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC	✓	✓	✓	✓	✓	✓

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC			

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	2.8 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC	✓	✓	✓*	✓	✓*	

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Rear Blade		
Counterweight	2.8 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC			

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)			1 PC		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC	✓	✓	✓	✓	✓	✓

CW-20 Dedicated Coupler *(continued)*

Undercarriage	Rear Blade		
Counterweight	3.3 mt		
Boom Type	VA		
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.60 m (8'6")
H115 GC			

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M315D2

Pin-on

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	2.9 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear Blade					
Counterweight	2.9 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	2.9 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	2.9 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓*			

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M315D2 (continued)

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓	✓*	

CW-20 S Dedicated Coupler

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	2.9 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓		

CW-20 S Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓		

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	2.9 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓*	✓*		

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.3 mt					
Boom Type	1 PC (short)		1 PC		VA	
Stick Length	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")	2.00 m (6'7")	2.30 m (7'7")
H115 GC S	✓	✓	✓	✓		

M315F

Pin-on

Undercarriage	Front (parallel) Blade; Rear Outriggers				Front Outriggers; Rear (parallel) Blade			
Counterweight	3.75 mt				3.75 mt			
Boom Type	Offset		VA		Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear (radial) Blade				Rear (parallel) Blade			
Counterweight	3.75 mt				3.75 mt			
Boom Type	Offset		VA		Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M315F (continued)

Pin-on (continued)

Undercarriage	Rear (radial) Blade			
Counterweight	3.75 mt			
Boom Type	Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front (parallel) Blade; Rear Outriggers				Front Outriggers; Rear (parallel) Blade			
Counterweight	3.75 mt				3.75 mt			
Boom Type	Offset		VA		Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Outriggers; Rear (radial) Blade				Rear (parallel) Blade			
Counterweight	3.75 mt				3.75 mt			
Boom Type	Offset		VA		Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S	✓	✓	✓	✓			✓	✓*

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear (radial) Blade			
Counterweight	3.75mt			
Boom Type	Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S			✓*	✓*

CW-20 S Dedicated Coupler

Undercarriage	Front (parallel) Blade; Rear Outriggers				Front Outriggers; Rear (parallel) Blade			
Counterweight	3.75 mt				3.75 mt			
Boom Type	Offset		VA		Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S		✓		✓		✓		✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear (radial) Blade				Rear (parallel) Blade			
Counterweight	3.75 mt				3.75 mt			
Boom Type	Offset		VA		Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S		✓		✓				✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear (radial) Blade			
Counterweight	3.75 mt			
Boom Type	Offset		VA	
Stick Length	2.30 m (7'7")	2.45 m (8'0")	2.30 m (7'7")	2.45 m (8'0")
H115 GC S				✓*

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M316F

Pin-on

Undercarriage	Front (parallel) Blade; Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front (parallel) Blade; Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear (parallel) Blade					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M316F *(continued)*

Pin-on *(continued)*

Undercarriage	Rear (parallel) Blade					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front (parallel) Blade; Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front (parallel) Blade; Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M316F *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear (parallel) Blade					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓*	✓*	✓*		

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear (parallel) Blade					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓*	✓*	✓*		

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓*	✓*

CW-20 S Dedicated Coupler

Undercarriage	Front (parallel) Blade; Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M316F (continued)

CW-20 S Dedicated Coupler (continued)

Undercarriage	Front (parallel) Blade; Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Front Blade; Rear Outriggers					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear (parallel) Blade					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓*	✓*		

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear (parallel) Blade					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓*

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M316F (continued)

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.2 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓*	✓*	✓*		

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.7 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓*	✓*

M317D2

Pin-on

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.5 mt				3.9 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade							
Counterweight	3.5 mt				3.9 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.5 mt				3.9 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade							
Counterweight	3.5 mt				3.9 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓*	✓*		✓	✓	✓	✓*

CW-20 S Dedicated Coupler

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.5 mt				3.9 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M317D2 *(continued)*

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Rear Blade							
	3.5 mt				3.9 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓*	✓*		✓	✓	✓	✓*

M317F

Pin-on

Undercarriage	Front (parallel) Blade; Rear Outriggers			Front Outriggers; Rear (parallel) Blade		
	4.3 mt					
Counterweight	Offset		VA	Offset		VA
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on *(continued)*

Undercarriage	Rear (parallel) Blade			Wide Axle – Rear (parallel) Blade		
	4.3 mt					
Counterweight	Offset		VA	Offset		VA
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front (parallel) Blade; Rear Outriggers			Front Outriggers; Rear (parallel) Blade		
	4.3 mt					
Counterweight	Offset		VA	Offset		VA
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear (parallel) Blade			Wide Axle – Rear (parallel) Blade		
	4.3 mt					
Counterweight	Offset		VA	Offset		VA
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓*	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler

Undercarriage	Front (parallel) Blade; Rear Outriggers			Front Outriggers; Rear (parallel) Blade		
	4.3 mt					
Counterweight	Offset		VA	Offset		VA
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓	✓		✓	✓	

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Rear (parallel) Blade			Wide Axle – Rear (parallel) Blade		
	4.3 mt					
Counterweight	Offset		VA	Offset		VA
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓	✓		✓	✓	

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M317F (continued)

CW-20 Dedicated Coupler

Undercarriage	Front (parallel) Blade; Rear Outriggers			Front Outriggers; Rear (parallel) Blade		
Counterweight	4.3 mt			4.3 mt		
Boom Type	Offset	VA		Offset	VA	
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓	✓		✓	✓	

CW-20 Dedicated Coupler (continued)

Undercarriage	Rear (parallel) Blade			Wide Axle – Rear (parallel) Blade		
Counterweight	4.3 mt			4.3 mt		
Boom Type	Offset	VA		Offset	VA	
Stick Length	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")	2.45 m (8'0")	2.45 m (8'0")	2.60 m (8'6")
H115 GC S	✓	✓		✓	✓	

M318F

Pin-on

Undercarriage	Front and Rear Outriggers					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M318F (continued)

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade (Wide U/C)					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade (Wide U/C)					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M318F (continued)

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓*

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade (Wide U/C)					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M318F *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade (Wide U/C)					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M318F (continued)

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓*

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade (Wide U/C)					
Counterweight	3.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

CW-20 S Dedicated Coupler (continued)

Undercarriage	Rear Blade (Wide U/C)					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")	2.10 m (6'11")	2.40 m (7'10")	2.60 m (8'6")
H115 GC S	✓	✓	✓	✓	✓	✓

M320D2

Pin-on

Undercarriage	Front and Rear Outriggers				Front Outriggers; Rear Blade			
Counterweight	4.0 mt				4.0 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade			
Counterweight	4.0 mt			
Boom Type	1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front and Rear Outriggers				Front Outriggers; Rear Blade			
Counterweight	4.0 mt				4.0 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M320D2 (continued)

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade			
Counterweight	4.0 mt			
Boom Type	1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S				

CW-30 S Dedicated Coupler

Undercarriage	Front and Rear Outriggers				Front Outriggers; Rear Blade			
Counterweight	4.0 mt				4.0 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-30 S Dedicated Coupler (continued)

Undercarriage	Rear Blade			
Counterweight	4.0 mt			
Boom Type	1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓*		✓*	

CW-30 Dedicated Coupler

Undercarriage	Front and Rear Outriggers				Front Outriggers; Rear Blade			
Counterweight	4.0 mt				4.0 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-30 Dedicated Coupler (continued)

Undercarriage	Rear Blade			
Counterweight	4.0 mt			
Boom Type	1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓*		✓*	

M320F

Pin-on

Undercarriage	Front and Rear Outriggers							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M320F (continued)

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓*	✓	✓*	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade (Wide U/C)							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front and Rear Outriggers							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓		✓	✓	✓	

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓		✓	✓	✓	

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓		✓	✓	✓	

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S								

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M320F (continued)

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade (Wide U/C)							
	3.7 mt				4.2 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓*				✓	✓*	✓	

CW-30 S Dedicated Coupler

Undercarriage	Front and Rear Outriggers							
	3.7 mt				4.2 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-30 S Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)							
	3.7 mt				4.2 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-30 S Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade							
	3.7 mt				4.2 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-30 S Dedicated Coupler (continued)

Undercarriage	Rear Blade							
	3.7 mt				4.2 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S					✓*	✓*	✓*	

CW-30 S Dedicated Coupler (continued)

Undercarriage	Rear Blade (Wide U/C)							
	3.7 mt				4.2 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓*	✓*		✓	✓	✓	✓

CW-30 Dedicated Coupler

Undercarriage	Front and Rear Outriggers							
	3.7 mt				4.2 mt			
Counterweight	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M320F (continued)

CW-30 Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade (Wide U/C)							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-30 Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-30 Dedicated Coupler (continued)

Undercarriage	Rear Blade							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S					✓	✓*	✓*	✓*

CW-30 Dedicated Coupler (continued)

Undercarriage	Rear Blade (Wide U/C)							
Counterweight	3.7 mt				4.2 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")	2.50 m (8'2")	2.80 m (9'2")
H120 GC S	✓	✓*	✓	✓*	✓	✓	✓	✓

M322D2

Pin-on

Undercarriage	Front and Rear Outriggers					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M322D2 (continued)

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓*	✓	✓	✓*

Pin-on (continued)

Undercarriage	Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators *(continued)*

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M322D2 *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S						

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓*	✓*		✓*	✓*	

(continued on next page)

Matching – Wheeled Excavators *(continued)*

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M322D2 *(continued)*

Cat Pin Grabber Coupler *(continued)*

Undercarriage	Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

CW-40 S Dedicated Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler *(continued)*

Undercarriage	Front and Rear Outriggers					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler *(continued)*

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M322D2 (continued)

CW-40 S Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓*			✓*		

CW-40 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓		✓	✓	

CW-40 S Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler

Undercarriage	Front and Rear Outriggers					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Front and Rear Outriggers					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

(continued on next page)

Matching – Wheeled Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M322D2 (continued)

CW-40 Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	3.9 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓*	✓*		✓*	✓*	

CW-40 Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	4.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓*	✓	✓	✓*

CW-40 Dedicated Coupler (continued)

Undercarriage	Rear Blade					
Counterweight	5.4 mt					
Boom Type	1 PC			VA		
Stick Length	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")	2.20 m (7'3")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓

M322F

Pin-on

Undercarriage	Front and Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 * Working Range Front Only
 † Allowed Usage on Machine Less Than 50%
 No Match

M322F (continued)

Pin-on (continued)

Undercarriage	Front Blade; Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

Pin-on (continued)

Undercarriage	Rear Blade							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓*	✓	✓*	✓	✓	✓	✓

Cat Pin Grabber Coupler

Undercarriage	Front and Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓		✓		✓		✓	

Cat Pin Grabber Coupler (continued)

Undercarriage	Front Blade; Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓		✓		✓		✓	

Cat Pin Grabber Coupler (continued)

Undercarriage	Rear Blade							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S					✓		✓	

(continued on next page)

Hammer Technical Specifications

Matching – Wheeled Excavators (continued)

Match
 Working Range Front Only
 Allowed Usage on Machine Less Than 50%
 No Match

M322F (continued)

CW-40 S Dedicated Coupler

Undercarriage	Front and Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler (continued)

Undercarriage	Front Blade; Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-40 S Dedicated Coupler (continued)

Undercarriage	Rear Blade							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓*				✓	✓	✓	✓

CW-40 Dedicated Coupler

Undercarriage	Front and Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Front Blade; Rear Outriggers							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Front Outriggers; Rear Blade							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓

CW-40 Dedicated Coupler (continued)

Undercarriage	Rear Blade							
Counterweight	3.5 mt				4.7 mt			
Boom Type	1 PC		VA		1 PC		VA	
Stick Length	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")	2.50 m (8'2")	2.90 m (9'6")
H120 GC S	✓*		✓*		✓	✓	✓	✓

(continued on next page)

Hammer Technical Specifications

Additional Options

Model	Part No.	Autolube Kit, Hammer-mount
H110 GC S Top-mount	565-4611	550-0446
H115 GC S Top-mount	536-3733	
H120 GC S Top-mount	536-3734	
H130 GC S Top-mount	536-3735	
H140 GC S Top-mount	536-3736	
H160 GC S Top-mount	580-6100	
H180 GC S Top-mount	596-2304	

Hammer Technical Specifications

Autolube

Autolube Kit, Hammer-mount	Part No.	317-4203	317-4204	317-4206
Supply Pressure minimum, hammer circuit	bar	90	90	90
	psi	1305	1305	1305
Supply Pressure maximum, hammer circuit	bar	250	250	250
	psi	3626	3626	3626
Flow Displacement, per minute	l	2	2	2
	gal	0.6	0.6	0.6
Operating Temperature, minimum	°C	0	0	0
	°F	31	31	31
Operating Temperature, maximum	°C	70	70	70
	°F	158	158	158
Grease Flow, factory default, per minute	cc	1.68	1.68	1.68
	in ³	0.11	0.11	0.11
Autolube, hammer-mount, grease	single	317-8491	317-8491	317-8491
	12-pack	317-8492	317-8492	317-8492
Autolube Kit, carrier-mount				152-3395
Autolube, carrier-mount, hammer paste, cartridge (400 g)				130-6951
Autolube, carrier-mount, hammer paste, pail (5 kg)				133-8807

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

GEJQ0397 (03-2022)
(Global)

© 2022 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

