

# 5006AC-E23TAG Electric Power Engines

Power range 1500 rpm 533-788 kW

Emissions Equivalent to U.S. EPA Tier 2

The Perkins® 5006AC-E23TAG has been designed to offer reliable power for all electric power applications, including standby, prime, critical and data centres.

Engineered and built specifically for the power generation market, the Perkins® 5000 Series is a power-packed engine range built to be dependable, versatile and offer lower emissions to meet regulatory standards.



## Features and benefits

- The 5000 Series delivers **maximised productivity** through outstanding load acceptance, achieving NFPA110 Type 10 and ISO 8528-5 G2 and G3 performance class and deliver high altitude capability. The engine build and performance have been designed from the ground up with ultimate productivity and dependability in mind, so customers can be confident that power will be available when required. They have been tested around the world, in the harshest environments, to deliver performance, no matter the conditions.
- Excellent oil consumption through dedicated piston, ring and liner assembly and low fuel consumption deliver minimised **daily operating costs**.
- Design of core engine components mean the 5000 Series delivers more power, more quickly no matter the demands of the application or the environment in which it is placed. A single point customer electronics connection supports **ease of integration and service accessibility** is provided from a single side with 500 hours or two year oil and fuel service interval whichever comes first.
- The 5000 Series utilises **advanced technology**, with full authority electronics, that easily integrate into the customer's chosen telematic solutions and are equivalent to U.S. EPA Tier 2 emission standards\*.

\*Please refer to TPD2362 for further emissions data

# 5006AC-E23TAG Electric Power Engines

Power range 1500 rpm 533-788 kW

Emissions Equivalent to U.S. EPA Tier 2

## Specification

	Model	
	5006AC-E23TAG1	5006AC-E23TAG2
Configuration	Electro unit/ElectropaK	
Cylinders	6 vertical in-line, 4 stroke	
Displacement, litres (in <sup>3</sup> )	22.921 (1398.73)	
Aspiration	Turbocharged and air-to-air chargecooled	
Bore and stroke, mm (in)	160 x 190 (6.3 x 7.5)	
Combustion system	Direct injection	
Compression ratio	12.8:1	
Exhaust aftertreatment	N/A	
Rotation (viewed from flywheel)	Anti-clockwise	
Total lubricating oil capacity, litres (US gal)	113.4 (30)	
Cooling system	Watercooled	
Total coolant capacity, litres (US gal)	120 (31.7)	

## Technical information

Model	Speed	Type of Operation	Engine Power		Typical Generator Output* (Net)		Prime Fuel Consumption			
			Gross	Net			ESP	100%	75%	50%
	rpm		kW (hp)	kW (hp)	kVA	kWe	g/kWh	g/kWh	g/kWh	g/kWh
5006AC-E23TAG1	1500	Prime/DCP/LTP	660 (885)	638 (856)	750	600	202	204	214	216
		Standby/ESP	724 (971)	702 (941)	825	660				
		COP	533 (715)	511 (685)	600	480	217			
5006AC-E23TAG2	1500	Prime/DCP/LTP	703 (943)	681 (913)	800	640	204	208	216	218
		Standby/ESP	788 (1057)	766 (1027)	900	720				
		COP	567 (760)	545 (731)	640	512	217			

\*Generator powers are typical and based on typical alternator efficiencies and a power factor (cos  $\theta$ ) or 0.8

5006 50 Hz platform has a 94% assumed alternator efficiency

# 5006AC-E23TAG Electric Power Engines

**Power range 1500 rpm 533-788 kW**

**Emissions Equivalent to U.S. EPA Tier 2**

## Standard equipment


	Model	
	5006AC-E23TAG1	5006AC-E23TAG2
Electro unit or ElectropaK	Both	
Radiator fitted	Loose	
Fuel filter, engine mounted	✓	
Water separator	N/A	
Fuel priming pump (manual/electric)	Electric	
Fuel cooler (not required for most installations)	✓	
Air filter, engine mounted	✓	
Engine ECM, engine mounted	✓	
Wiring harness to ECM	✓	
Wiring harness (all connectors to single customer interface)	✓	
Starter motor	✓	
Battery charging alternator	✓	
Flywheel housing	✓	
Flywheel	✓	
Fan	✓	
Fan guard	✓	
Temperature and oil pressure for automatic stop/alarm configurable	✓	

# 5006AC-E23TAG Electric Power Engines

Power range 1500 rpm 533-788 kW

Emissions Equivalent to U.S. EPA Tier 2

## Engine package weights and dimensions

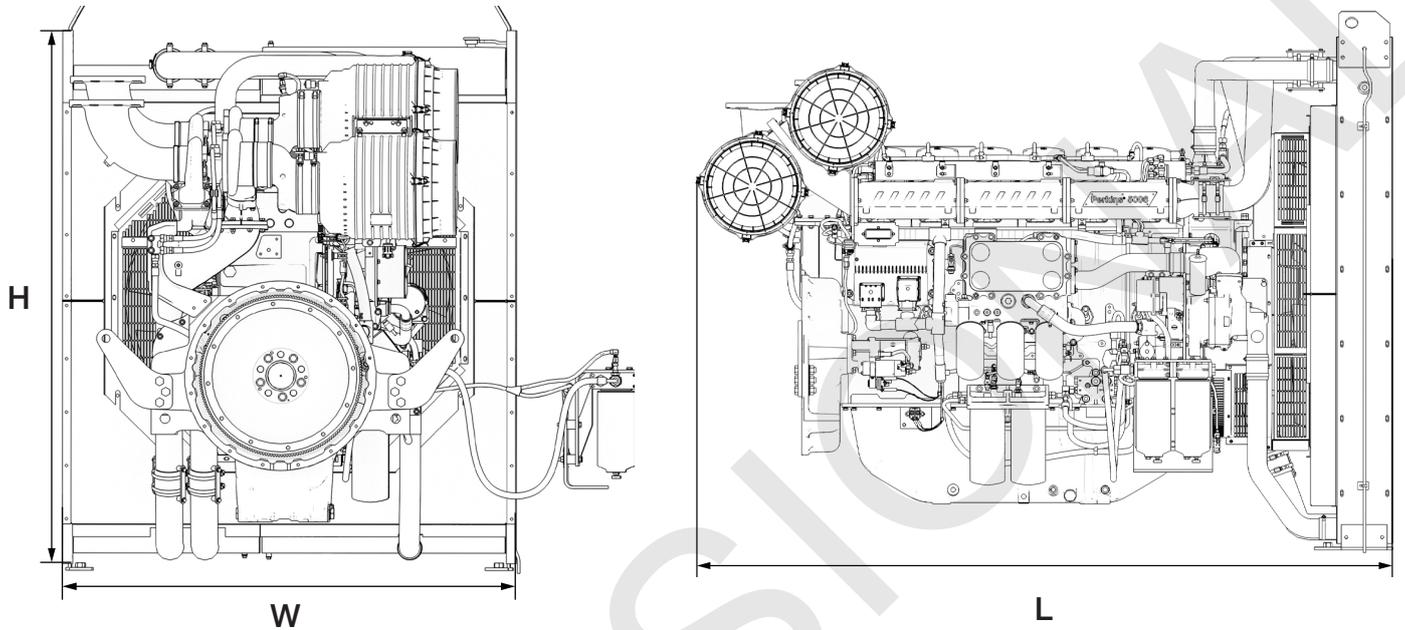

	Model	
	5006AC-E23TAG1 / 5006AC-E23TAG2	
Configuration	Electro unit	ElectropaK
Dimensions, H x L x W, mm (in)	1745 x 2276 x 1446 (68.7 x 89.6 x 56.9)	2126 x 2730 x 1690 (83.7 x 107.4 x 66.5)
Dry Weight, kg (lb)	2405 (5303)	2885 (6361)

**Prime power:** Unlimited hours usage with an average load factor of 80 percent of the published prime power over each 24 hour period. A 10 percent overload is available for one hour in every 12 hours operation.

**Standby power:** Limited to 500 hours usage with an average load factor of 80 percent of the published standby power rating over each 24 hour period. Up to 300 hours of annual usage may be run continuously. No overload is permitted.

**Data Centre Power (DCP):** Power available for variable or continuous electrical loads in a data centre application. Up to 100 percent load factor is permitted for unlimited time. An overload of 10 percent permitted for one hour in every 12 hours of operation. DCP power definition relies on ISO8528-1 2018 standard to be followed by generator set manufacturer, and will support Tier I to Tier IV classifications of data centres as per UPTIME institute guidelines.

**Limited-time running power (LTP):** maximum of 500 hours per year with an average load factor of 100 percent load factor of the published LTP power.

**Continuous Operating Power (COP):** Unlimited hours usage with an average load factor of 100 percent of the published continuous operating power. No overload is permitted on continuous operating power.

All information in this document is substantially correct at time of printing and may be altered subsequently. Photographs are for illustrative purposes only and may not reflect final specification. Final weight and dimensions will depend on completed specification. Information subject to selected configuration, and subject to change without notice. All data based on operation to ISO 3046/1:2002 standard reference conditions. PN3249EN-01 (05-22) Produced in England ©2022 Perkins Engines Company Limited