



Image shown may not reflect actual configuration.

## D250 GC – D600 GC Sound Attenuated Enclosures

60 Hz

### Features

#### Robust/Highly Corrosion Resistant Construction

- Factory installed on skid base or tanks base
- Environmentally friendly, polyester powder baked paint
- Enclosure constructed with 18-gauge steel
- Interior zinc plated fasteners
- Internally mounted exhaust silencing system
- Comply with ASCE /SEI 7 for Wind loads up to 100 mph
- Designed and tested to comply with UL 2200 Listed generator set package

#### Excellent Access

- Large cable entry area for installation ease.
- Accommodates side mounted single or multiple breakers.
- Two doors on both sides.
- Vertically hinged allow 180° opening rotation
- Radiator fill cover.

#### Security and Safety

- Lockable access doors which give full access to control panel and breaker.
- Cooling fan and battery charging alternator fully guarded.
- Fuel fill, oil fill and battery can only be reached via lockable access.
- Externally mounted emergency stop button (Optional).
- Designed for spreader bar lifting to ensure safety.
- Stub-up area is rodent proof.

#### Sound Attenuated Level 2

- Caterpillar white paint
- UL Listed integral fuel tank with 24 hours running time capacity (Optional).
- DC lighting package (Optional)

## Enclosure Package Operating Characteristics


Enclosure Type	Standby	Cooling Air Flow Rate		Ambient Capability*		Sound Pressure Levels (dBA) at 7m (23 ft)
	ekW	m <sup>3</sup> /s	cfm	°C	°F	100% Load
Level 2 Sound Attenuated Enclosure (Steel)	250	6.4	13561	57	135	74
	300	6.4	13561	51	125	74
	350	7.4	15680	57	134	71
	400	7.4	15680	53	127	71
	450	8.4	17692	54	130	73
	500	8.4	17692	50	122	73
	550	11.2	23731	56	133	73
	600	11.2	23731	53	127	73

\*Cooling system performance at sea level. Consult your Cat<sup>®</sup> dealer for site specific ambient and altitude capabilities.



**Note:** Sound level measurements are subject to instrumentation, installation and manufacturing variability, as well as ambient site conditions

## Weights and Dimensions

Enclosure Type	Standby Ratings	Length, L		Width, W		Height, H		Package Weights	
	ekW	mm	in	mm	in	mm	in	kg	lb
Sound Attenuated Enclosure on Skid Base	250	3958	155.8	1440	56.7	1991	78.4	2857	6298.6
	300							2945	6492.6
	350	4633	182.4	1630	64.2	2227	87.7	3983	8781.0
	400							4017	8856.0
	450	4823	189.8	1630	64.2	2227	87.7	4408	9718.0
	500							4457	9826.0
	550	4980	196.1	1865	73.4	2172	85.5	4754	10480.8
	600							4837	10663.8
Sound Attenuated Enclosure on UL Listed Integral Fuel Tank Base	250	3958	155.8	1440	56.7	2487	97.9	3497	7709.6
	300							3585	7903.6
	350	4633	182.4	1630	64.2	2644	104.1	4765	10505.0
	400							4799	10580.0
	450	4823	189.8	1630	64.2	2777	109.3	5345	11783.7
	500							5394	11891.7
	550	4980	196.1	1865	73.4	2723	107.2	5973	13168.2
	600							6056	13351.2
Sound Attenuated Enclosure on UL Listed Extended Integral Fuel Tank Base	250	4608	181.4	1430	56.3	2379	93.7	3590	7914.6
	300							3678	8108.6
	350	5251	203.7	1620	63.8	2561	100.8	4876	10749.7
	400							4910	10824.7
	450	5909	232.6	1620	63.8	2612	102.8	5497	12118.8
	500							5546	12226.8
	550	6759	266.1	1865	73.4	2487	97.9	6237	13750.2
	600							6320	13933.2

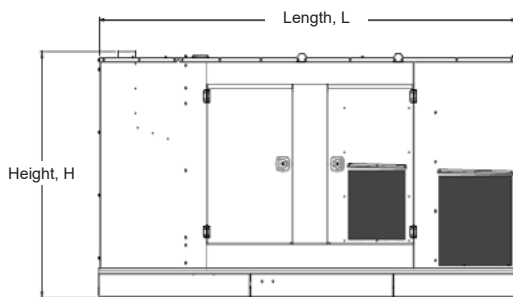

**Sound Attenuated Enclosure on Skid Base**

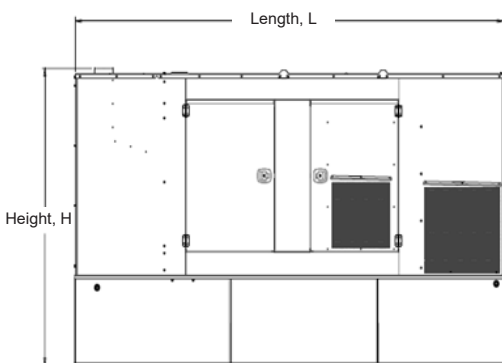

**Sound Attenuated Enclosure on a UL Listed Integral Fuel Tank Base**

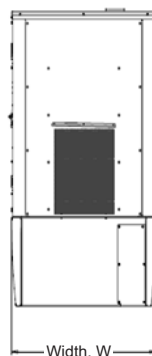


Image shown may not reflect actual configuration

**LET'S DO THE WORK.™**

[www.cat.com/electricpower](http://www.cat.com/electricpower)

©2022 Caterpillar  
All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.