



Image shown may not reflect actual configuration

The Cat® C18 (>560 kW) industrial diesel engine with serial twin turbocharged-aftercooled (TTA) arrangement is offered in ratings ranging from 563-597 kW (755-800 bhp) @ 1800 rpm. These ratings meet U.S. EPA Tier 4 Final and EU Stage V emission standards.

C18 engines are ideal choices to power applications in agriculture, aircraft ground support, construction, forestry, general industrial, material handling, and mining.

Specifications

Power Rating – Twin Turbo (>560 kW)		
Minimum Power	563 kW	755 bhp
Maximum Power	597 kW	800 bhp
Rated Speed	1800 rpm	

Emission Standards	
Emissions	U.S. EPA Tier 4 Final and EU Stage V Nonroad Emission Standards

Engine Specifications		
Engine Configuration	In-Line 6, 4-Stroke-Cycle Diesel	
Bore	145 mm	5.7 in
Stroke	183 mm	7.2 in
Displacement	18.1 L	1104.5 in ³
Aspiration	Series Twin Turbocharged-Aftercooled (TTA, >560 kW)	
Compression Ratio	16.0:1	
Combustion System	Direct Injection	
Rotation (from flywheel end)	Counterclockwise	
Cooling System Capacity (engine)	27 L	28 qts
Lube System (refill)	40-74 L	10.5-19.5 gal

Engine Dimensions (Approximate. Final dimensions dependent on selected options.)		
Length	1438 mm	56.6 in
Width	969 mm	38.1 in
Height	1248 mm	49.1 in
Weight – Net Dry (basic operating engine without optional attachments)	1542 kg	3399.5 lb

Aftertreatment Dimensions (Approximate. Final dimensions dependent on selected options.)		
Length	944 mm	37.2 in
Width	425 mm	16.7 in
Height	502 mm	19.8 in
Weight	32 kg	70.5 lb

Benefits & Features

High Power Density

C18 engines with ratings above 560 kW (755 bhp) have excellent power density. With a top rating of 597 kW (800 bhp), the C18 (>560 kW) uses a compact, single-can diesel oxide catalyst (DOC) aftertreatment. The DOC is a maintenance-free, passive aftertreatment solution that eliminates the need for thermal management and all the associated components. The C18 (>560 kW) does not require diesel exhaust fluid (DEF) and removes all DEF infrastructure (DEF tank, pump, lines, electronics) further reducing the overall package size.

Power density coupled with a compact aftertreatment allows you to downsize the total space claim of your installation across numerous applications while realizing a reduction in maintenance requirements and cost of operation.

Reliable, Quiet and Durable Power

World-class manufacturing capability and processes coupled with proven core engine designs assure reliability, quiet operation, and many hours of productive life.

Broad Application Range

Industry-leading range of factory configurable ratings and options for agricultural, materials-handling, construction, mining, forestry, waste, and other industrial applications.

Fluid Efficiency

- Fluid consumption optimized to match operating cycles of a wide range of equipment and applications while maintaining low operating costs.
- No diesel exhaust fluid (DEF) requirement on C18 ratings greater than 560 kW (755 bhp) for a lifetime of low cost of operation.

Installation

- Fully configurable engine with exceptional power density, numerous options, and a compact, simplified aftertreatment to minimize total package size and enable commonization across a wide range of applications.
- Aftertreatment installation flexibility to meet all applications – including remote mount and engine-mounted.
- Low heat rejection levels allow for optimized cooling package at equivalent power.
- The C18 is certified to U.S. EPA Tier 4 Final and EU Stage V Nonroad Emission Standards, simplifying customer design and installation across regions.

Low Cost Maintenance

- Worldwide service delivers ease of maintenance and simplifies the servicing routine.
- Maintenance-free diesel oxide catalyst (DOC) for C18 ratings greater than 560 kW (755 bhp) ensures a lifetime of low cost ownership.
- Standard service intervals of 500 hours under normal operating conditions.
- The S•O•SSM program is available from your Cat dealer to optimize oil change intervals.
- Ideal for high-hour applications over 10,000 hours.
- Remote mount options for serviceable items such as oil and fuel filters.

Benefits & Features (continued)

Quality

Every Cat engine is manufactured to stringent standards in order to assure customer satisfaction.

World-class Product Support Offered Through Global Cat Dealer Network

- Scheduled maintenance, including S•O•S sample
- Customer support agreements (CSA)
- Extended service coverage (ESC)
- Superior dealer service network
- Extended dealer service network through the Cat Industrial Service Distributor (ISD) program

Tier 4 Final, Stage V Aftertreatment – C18 (>560 kW)

- Clean emissions module (CEM) consisting of a single-can diesel oxide catalyst (DOC).
- No coolant, fuel, or electrical connection points required.
- No thermal management or regeneration required.
- Maintenance-free until major engine overhaul.
- No diesel exhaust fluid (DEF) required (reduced lifelong operating cost).
- Remote-mounted aftertreatment standard for greatest flexibility. Engine-mounted aftertreatment (EMAT) optional for simplified installation.



Shown with optional engine-mounted aftertreatment (EMAT)

Standard Equipment

Air Inlet System

- Series Twin Turbocharged
- Air-to-Air Aftercooled
- Rear exhaust configuration

Control System

- Electronic control system
- Over-foam wiring harness
- Configurable software features
- Engine monitoring system SAE J1939 broadcast and control
- Integrated Electronic Control Unit (ECU)
- Remote fan control
- 12V and 24V available

Cooling System

- Vertical outlet thermostat housing
- Centrifugal water pump
- Guidance on cooling system design available through your dealer to ensure equipment reliability

Flywheels and Flywheel Housing

- SAE No. 0 and SAE No. 1 flywheel housings
- Available SAE 1 power take-off (PTO) housing with optional SAE B and SAE C power take-off drives
- Engine power can also be taken from the front of the engine with optional attachments

Standard Equipment (continued)

Fuel System

- Mechanical Electronic Unit Injectors (MEUI)
- Primary fuel filter
- Secondary and tertiary fuel filters
- Fuel transfer pump
- Electronic fuel priming

Lube System

- Oil cooler
- Oil filler
- Lube oil filter
- Oil dipstick
- Gear-driven oil pump
- Choice of front, rear or center sumps
- Open crankcase ventilation system with fumes disposal (OCV filter system) standard on C18 engines with ratings greater than 560 kW

PTO

- SAE 1 PTO available with optional SAE B and SAE C PTO drives
- Engine power can also be taken from the front of the engine on some applications

General

- Caterpillar Yellow paint, with optional colors available



**Emissions: U.S. EPA Tier 4 Final
and EU Stage V Nonroad
Emission Standards**

C18 (>560 kW)
563-597 kW/ 755-800 bhp
1800 rpm

Image shown may not reflect actual configuration

	Metric	English
General Engine		
Number of Cylinders	6	
Bore	145 mm	5.7 in
Stroke	183 mm	7.2 in
Displacement	18.1 L	1104.5 in ³
Compression Ratio	16.0:1	

RATING DEFINITIONS AND CONDITIONS

IND-A (Continuous) for heavy duty service where the engine is operated at maximum power and speed up to 100% of the time without interruption or load cycling.

IND-B for service where power and/or speed are cyclic (time at full load not to exceed 80%).

IND-C (Intermittent) is the horsepower and speed capability of the engine where maximum power and/or speed are cyclic (time at full load not to exceed 50%).


IND-D for service where maximum power is required for periodic overloads (time at full load not to exceed 10% of the duty cycle).

Diesel Engines – greater than 7.1 liter. All rating conditions are based on SAE J1995, inlet air standard conditions of 99 kPa (29.31 in Hg) dry barometer and 25°C (77°F) temperature. Performance measured using a standard fuel with fuel gravity of 35° API having a lower heating value of 42,780 kJ/kg (18,390 btu/lb) when used at 29°C (84.2°F) with a density of 838.9 g/L.



**Emissions: U.S. EPA Tier 4 Final
 and EU Stage V Nonroad
 Emission Standards**

Performance Data

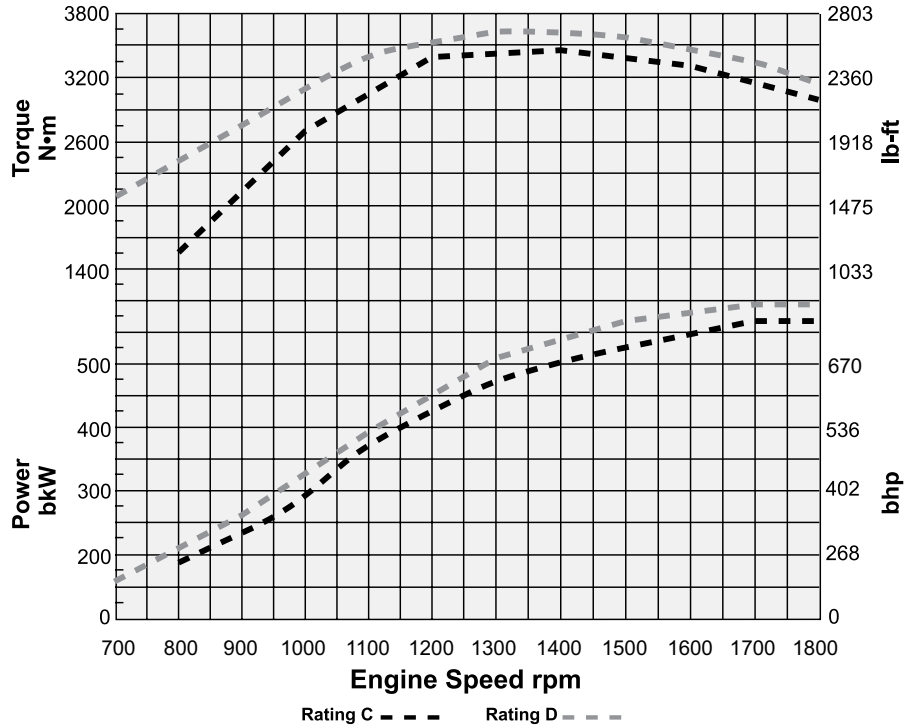

Rating	Aspiration	Rated Speed rpm	Rated Power kW	Rated Power bhp	Peak Torque N·m	Peak Torque lb-ft	Speed rpm
C	TTA	1800	563	755	3504	2585	1300
D	TTA	1800	596	799	3710	2736	1300

www.cat-Industrial.com

©2018 Caterpillar

All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos, S•O•S, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.