



# Cat<sup>®</sup> AP655

## Steel Track Asphalt Paver

*The Cat<sup>®</sup> AP655 Asphalt Paver delivers a high-return on investment with its fast-heating screed system, durable components, and easy to use technology. A variety of screed choices provide versatility and high-quality results on interstates, highways, airports, and parking lots.*

### High Return on Investment

- Exclusive 70 kW integrated generator delivers fast, reliable screed heating and is designed for long life by the same team that developed the D7E electric drive dozer
- Fast heating screed leads to more daily production, heating time in as little as 15 minutes
- The steel track undercarriage delivers excellent traction, good flotation, and smooth travel with its bogied design
- Exclusive air flow design improves operating conditions for the crew and keeps components cooler for lasting durability

### Technology That Works For You

- Pave Start Assistant (option) saves set-up profiles for repeatable use on future job sites including: tow-point height, screed heat temperature, paving speed, paving width, paving depth, crown, extender slope and height, screed assist, and screed locking features
- A hopper level sensor (option) with temperature indication keeps the operator informed of material height and delivery temperatures, indicators are located in each tractor display
- Exclusive screed heating system monitors elements for failure conditions and helps eliminate unnecessary replacement
- Cat<sup>®</sup> Grade Control (option) is integrated into the tractor and screed displays for optimized operator efficiency

### High Quality Results, Higher Earnings

- Versatile tamper-bar screed designs deliver excellent ride, density, and mat texture while providing superior adjustment
- Tow-point utilizes exclusive linkage design for optimal screed flotation
- Exclusive 2-speed proportional control on the screed extenders
- Cat Grade Control is a factory-integrated guidance system that helps remove irregularities from the surface and control mat thickness for increased production, lower operating costs, and higher profitability

### Low Owning and Operating Costs

- Exclusive Eco-mode and Automatic Engine Speed Control, reduce fuel consumption and lower sound levels for better comfort and communication
- 4-pump feeder system is designed for high production in Eco-mode, leads to lower fuel consumption
- Million cycle switches provide reliability
- Conveyor bed plates and chain guards designed to minimize labor requirements and provide lower cost replacement
- Heating elements slide-out for easy replacement
- Machined screed frames simplify screed plate replacement
- Enhanced hopper flashing with increased memory and temperature resiliency offers better performance during truck exchanges



# Cat® AP655 Steel Track Asphalt Paver

---

## More Comfort

- Ventilation system draws fumes from the auger chamber and redirects them away from the operator for a more comfortable working environment
- Dual operating station provide back-up capability and complete control from either side of the machine, each station can swing-out beyond the frame for good all-around visibility
- Heated seat option, pneumatic suspension, multiple adjustments, and tilting consoles provide day-long comfort
- Eco-mode provides low sound levels that supports clear communication with the crew
- High visibility 76 mm (3") seat belt helps with crew safety compliance
- USB port simplifies software updates
- Cup holders offer convenience

## Easy Viewing Displays, Simple Operation

- Touch-screen displays with adjustable brightness control enable operators to fine-tune performance in various lighting conditions
- Touch-screen access simplifies activation of the generator and auxiliary power, while also providing easy adjustments to screed plate heating temperatures, tamper and vibratory speeds, Cat Grade Control (option), and stored operator preferences
- Operating displays can be tailored to specific language requirements with multiple options available

## Cat Electronics

- Cat Electronic Control Modules (ECM) and Electronic Technician (ET) compatibility simplifies diagnostics and trouble-shooting procedures

## Product Link™

- Make timely, fact-based decisions to maximize efficiency, improve productivity, and lower owning and operating costs
- Easily track location, machine hours, fuel usage, and idle time
- Diagnostic codes are made available through online web applications

## Service and Repair Kits

- Paver and screed service and repair kits include the parts necessary to complete specific repairs
- Cat genuine parts are manufactured to precise specifications and designed for optimal performance and maximum uptime
- Repair kits are identified by a single part number to make ordering easy
- Select kits are available to be packaged as a kit by the dealer for over-the-counter purchases or through the dealer service shop

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>OPERATING ENVIRONMENT</b>			<b>MATERIAL DELIVERY</b>		
Air-ride seat		✓	Auger extensions		✓
Canopy – hard top		✓	Leveling devices		✓
Deceleration pedal		✓	Mainframe extensions – manual		✓
Dual operating stations	✓		Mainframe extensions – power		✓
Friction steering		✓	Material feed sensors – contact	✓	
Heated seats		✓	Material feed sensors – sonic		✓
Side shields		✓	Power folding front hopper apron		✓
Steering guide	✓		Push-roller – adjustable	✓	
Tow-point indicator		✓	Wash-down pump and reel		✓
Umbrella – tractor/screed		✓	Washdown tank		✓
Ventilation system		✓	Wide-width paving packages		✓
Visor – LCD screen		✓	<b>SERVICE AND MAINTENANCE</b>		
Windshield – requires hard top canopy		✓	Extended-life coolant to -35° C (-37° F)	✓	
<b>TECHNOLOGY</b>			Engine coolant heater (C4.4 engine)	✓	
Cat® Grade Control		✓	Hydraulic oil – extended life	✓	
Hopper level and material temperature indication		✓	Remote access drains and lubrication points	✓	
Pave Start Assistant		✓	Service repair kits		✓
Product Link™ Elite 631 – satellite		✓	Sampling ports for Scheduled Oil Sampling (S.O.S <sup>SM</sup> )	✓	
Product Link Elite 641 – cellular	✓		Sight Gauges – engine coolant, hydraulic oil	✓	
<b>POWERTRAIN</b>			Uptime kit		✓
Automatic engine speed control	✓		<b>SAFETY</b>		
Ballast - front weights		✓	Alarm – back-up	✓	
Cat C4.4 – four-cylinder		✓	Horn – warning (front & rear)	✓	
Cat C7.1 – six-cylinder		✓	Lights – working	✓	
Cooling fan – variable speed	✓		Lights – roading		✓
Eco-mode	✓		Mirror package	✓	
<b>ELECTRICAL SYSTEM</b>			Vandal covers	✓	
1000 CCA batteries (2)	✓		Warning – LED safety beacons		✓
100 amp alternator	✓				
12-volt power receptacle	✓				
24-volt charging system	✓				
Automotive-type fuse system	✓				
Auxiliary power panel – 6.6 kW		✓			
Cat Electronic Technician (Cat ET)	✓				
Generator – 70 kW	✓				
Machine security – wire ready	✓				
Remote jump-start receptacle	✓				

# Cat® AP655 Steel Track Asphalt Paver

## Technical Specifications

### PowerTrain

Engine model	Cat C4.4	
Engine power @ 2200 rpm (ISO 14396-2002)	129 kW	173 hp

*Meets U.S. EPA Tier 4 Final, EU Stage V, Korea Tier 5, and China Nonroad Stage IV emission standards.*

Engine model	Cat C7.1	
Engine power @ 2200 rpm (ISO 14396-2002)	151 kW	202 hp

*Meets Brazil MAR-1 emissions standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA*

Speed – paving	25 mpm	82 fpm
Speed – travel	14.5 km/hr	9 mph

### Machine Weight

Paver only (shipping)	15 754 kg	34,731 lb
w/SE50 VT screed (operating)	19 530 kg	43,056 lb
w/SE60 VT XW screed (operating)	21 052 kg	46,411 lb

*Operating Weights are approximate and include coolant, lubricants, full fuel tank, and 75 kg (165 lb) operator.*

### Service Refill Capacities



Maximum throughput capacity	1300 Tonnes	1433 Tons
Hopper capacity (including tunnels)	7.1 m <sup>3</sup>	250 ft <sup>3</sup>
Cooling system – C4.4 engine	31 L	8 gal
Cooling system – C7.1 engine	37 L	9.8 gal
Diesel Exhaust Fluid (DEF) – C4.4 engine	19.1 L	5 gal
Engine oil – C4.4	13.5 L	3.6 gal
Engine oil – C7.1	15.5 L	4.1 gal
Fuel tank	278 L	73 gal
Hydraulic tank	219 L	58 gal
Washdown spray tank	30 L	7.9 gal

### Paving Range With Extensions

SE50 VT screed	2.55 m - 8 m	8' 4" - 26' 4"
SE60 VT XW screed	3.0 m - 10.0 m	10' - 33'
Paving depth	305 mm	12"

### Dimensions

1	Operating length w/SE50 VT	6831 mm	22' 5"
	Shipping length w/SE50 VT	6666 mm	21' 10"
	Shipping width w/end gates - SE50 VT	2762 mm	9' 1"
	Shipping width w/folded end gates - SE50 VT	2550 mm	8' 4"
1	Operating length w/SE60 VT XW	7034 mm	23' 1"
	Shipping length w/SE60 VT XW	6910 mm	22' 8"
	Shipping width w/end gates - SE60 VT XW	3211 mm	10' 6"
	Shipping width w/end gates folded - SE60 VT XW	3000 mm	9' 10"
2	Operating width	3306 mm	10' 10"
3	Operating height	3873 mm	12' 9"
4	Shipping height	3040 mm	10'
5	Operating platform height	1792 mm	5' 10"
6	Truck entry height	509 mm	20"
7	Truck entry width	3194 mm	10' 6"
8	Hopper length with push roller extended	2414 mm	7' 11"
	Auger diameter	406 mm	16"

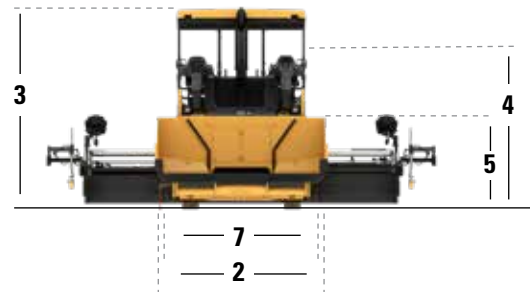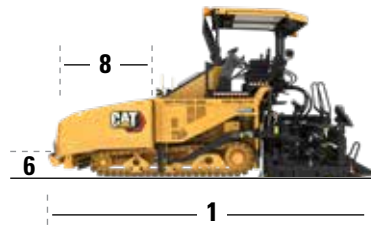

## Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit [www.caterpillar.com/en/company/sustainability.html](http://www.caterpillar.com/en/company/sustainability.html).

### ENGINE

- The Cat® C4.4 engine is available in configurations that meet U.S. EPA Tier 4 Final, EU Stage V, Korea Tier 5, and China Nonroad Stage IV emission standards.
- The Cat® C7.1 engine is available in configurations that meet Brazil MAR-1, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
- Cat U.S. EPA Tier 4 Final, EU Stage V, Korea Tier 5, and China Nonroad IV diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
  - ✓ 20% biodiesel FAME (fatty acid methyl ester)\*
  - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels
- Cat engines meeting Brazil MAR-1, equivalent to U.S. EPA Tier 3 and EU Stage IIIA, are compatible with diesel fuel blended with the following lower-carbon intensity fuels up to:
  - ✓ 100% biodiesel FAME (fatty acid methyl ester)\*\*
  - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

\*Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.

\*\* For use of blends higher than 20% biodiesel, consult your Cat dealer.

### PAINT

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
  - Barium < 0.01%
  - Cadmium < 0.01%
  - Chromium < 0.01%
  - Lead < 0.01%

### SOUND PERFORMANCE

With cooling fan speed at 70% of maximum value, engines meeting U.S. EPA Tier 4 Final, EU Stage V, Korea Tier 5, and China Nonroad Stage IV:

---

Operator Sound Pressure Level – 88 dB(A) European Directive 2000/14/EC, ISO 11201, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

---

Exterior Sound Power Level – 104 dB(A) European Directive 2000/14/EC, European Directive 2005/88/EC, ISO 3744, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

---

With cooling fan speed at 70% of maximum value, engines meeting Brazil MAR-1, equivalent to U.S. EPA Tier 3 and EU Stage IIIA:

---

Operator Sound Pressure Level – 89 dB(A) European Directive 2000/14/EC, ISO 11201, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

---

Exterior Sound Power Level – 106 dB(A) European Directive 2000/14/EC, European Directive 2005/88/EC, ISO 3744, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

---

- Hearing protection may be needed when operating with an open operator station for extended periods or in a noisy environment.

### OILS AND FLUIDS

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

### FEATURES AND TECHNOLOGY

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
  - Eco-mode operates at a lower rpm to minimize fuel consumption
  - Automatic engine speed control modifies engine speed when moved to and from neutral to enhance fuel efficiency
  - Advanced Eco-mode combines automatic engine speed control and Eco-mode to modify engine speed based on engine load, conserving fuel and increasing efficiency
  - Extended maintenance intervals reduce fluid and filter consumption





# Cat® AP655 Steel Track Asphalt Paver

---



For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2022 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

QEHQ2946-02 (10-2022)  
Build Number:07A

