



Cat[®] PM310, PM312, PM313

Cold Planers

Cat[®] PM310, PM312 and PM313 Cold Planers with integrated Cat Grade and Slope technology and the latest System K rotors are equipped to deliver performance, productivity and cutting precision. A comfortable operator environment puts intuitive controls at your fingertips, while long service intervals and easy maintenance access help simplify service. Although designed for a single operator, the PM300-Series includes features for supporting ground personnel. Many options are available to enhance machine versatility when optimum maneuverability or high production capabilities are required.

Efficient Performance

- The Cat[®] C9.3B engine meets Brazil MAR-1 emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA and delivers an increase in power density along with the latest electronic, fuel, and air systems compared to the previous Cat C9.3 engine
- Engine Idle Speed Management and multiple rotor speeds allow for optimal output and demand on the engine
- A variable-speed cooling fan operates at the lowest possible speed for quiet and efficient cooling
- Automatic Load Control monitors demand on the engine and adjusts milling speed to help prevent stalls while maintaining high production

Optimal Maneuverability and Control

- The reliable track undercarriage leverages proven designs from Cat mini excavators and uses an automatic tensioning system for consistent performance and longer track life
- A robust propel system features dual displacement motors at each leg post, utilizing a cross-drive pattern for additional traction in straight cuts
- Automatic traction control helps maintain consistent speed in the most challenging applications
- The articulating right rear leg can be easily positioned outside to help provide extra stability and traction or positioned in front of the rotor chamber for flush cutting
- An optional ballast weight kit is available to add weight over the rotor for increased cutting capability in more demanding applications
- Electronically switch rotor speeds during operation

Highly Effective Material Removal

- High-capacity conveyors efficiently remove milled material with variable speed discharge control
- A wide opening and seamless belt effectively clear the rotor chamber
- Adjust the belt speed to match material type and production rate
- The belt reverses direction to easily remove material from the conveyor during clean-up, and easy-access covers allow for quick inspection and cleaning of the rollers
- Conveyor folds for transportation and maintenance

Durable and Dependable Cutting System

- The rotor drive system is engineered to maximize torque transfer and features a heavy-duty dry clutch, dual stage belt drive and automatic belt-tensioning
- Durable, reinforced cutting chamber
- Hardened full-length side plate skis, inboard ski shoe, and anti-slab shoes are designed to reduce wear and maintenance



Cat® PM310, PM312, PM313 Cold Planers

High Production System K Rotors

Optimize Cutting Capability

- Cat System K rotors can be used for numerous applications and feature efficient material flow with a uniform cutting pattern
- A fastener-free design secures toolholders in place without a retaining pin, bolt or setscrew, speeding up replacement and eliminating the need for torquing
- Toolholders, base blocks and kicker paddles are built from high-strength alloy steel that's abrasion resistant for extended life
- Optional Cat Diamond bits are designed to stay sharp and last significantly longer than a carbide bit (ideal for bituminous applications without obstacles such as interstates or motorways)

Comfortable Work Environment

- Operate in comfort with a standard suspension seat, adjustable right arm console and intuitive, ergonomic controls
- A sliding operator station extends up to 215 mm (8.5 in) to provide improved visibility to the cutting edge
- Work areas are illuminated for nighttime operation with backlit keypads and wide-dispersion LED or halogen lighting options
- An optional hydraulically-powered canopy with extendible wing and handrail-mounted windscreen help protect the operator from sun, wind, and rain
- Better direct exhaust up and away from ground personnel or when milling close to buildings with the optional and stowable exhaust diverter
- Maximize dust removal from the working areas with the optional dust abatement system

Easy Operation

- Access integrated technology and automated systems through easy-to-use controls and a highly intuitive touchscreen interface
- Displays provide access to the gauge cluster, operating information, grade and slope, remote camera feeds, machine controls and diagnostics
- An optional grade control display can be positioned in the operator station or on the back of the machine to enable interaction with the grade system from the ground level
- A 14-button ground-level keypad gives ground operators convenient access to various machine functions (leg height, water spray, sideplates, moldboard and lights)
- A Standby/Resume button pauses major machine functions and lowers engine speed to conserve fuel during truck exchanges, and when ready to resume milling a push of the button automatically brings the machine back up to production at the same speed
- Once a rotor speed is selected and the cutting pattern is established, use of the Cruise Control button stores the propel speed and repeatedly returns to that same speed for every pass, and when used in combination with Standby/Resume allows for easy and precise pattern control
- Cut closer to obstacles on either side with the assistance of optional remote cameras and adjustable on-screen guidance lines

Boost Precision with Integrated Cat Technology

- Achieve accurate, repeatable and automatic cutting precision with the integrated Cat Grade and Slope system
- Obtain full control of grade and slope from any machine display
- Easily adjust grade control values and sensors through the touchscreen displays
- Adjust the speed at which the rotor drops into the cut for optimal machine control
- Set and automate transitions into/out of cuts
- Clear obstacles in the cutting path with ease using the obstacle jump feature
- Enhance for full 3D milling operation (additional hardware required)

Simple Service, Low Maintenance Costs

- Daily maintenance areas are easily accessible through large service doors
- Track components do not require routine maintenance and easy to replace track pads help lower service costs
- Standard ground-level controls and an optional hydraulically-operated rotor turning device simplify bit removal and replacement
- High and low pressure washdown options connect to the onboard water tank for convenient clean-up
- The accessory drive system allows use of select machine functions when the engine is off
- Electrical system wiring is color-coded and numbered for easy identification and wrapped in a protective, abrasion-resistant nylon braid for longer life
- Monitor fluid conditions with regular sampling to help extend change intervals up to 500 hours engine oil, 6000 hours hydraulic oil and 12000 hours coolant
- Built-in diagnostics monitor machine systems, alert the operator of performance issues and provide troubleshooting information
- VisionLink® takes the guesswork out of managing your entire fleet—regardless of size or equipment manufacturer*—by providing maintenance needs, machine hours, location, fuel usage, idle time, diagnostic codes, and more through interactive dashboards on your mobile device or desktop, helping you make informed decisions that lower costs, simplify maintenance, and improve safety and security on your jobsite
- Remote Flash allows you to update onboard software without a technician being present, allowing you to initiate software updates when convenient, increasing your overall operating efficiency**
- Remote Troubleshoot allows your Cat dealer to perform diagnostic testing on your connected machine remotely**
- Cat Inspect is a mobile application that allows you to easily perform digital preventative maintenance checks, inspections, and daily walkarounds
- Convenient parts availability, dealer locations and service repair kits simplify ordering of high wear components

** Data field availability can vary by equipment manufacturer and is provided through an application programming interface (API).*

*** Must be within cell range coverage.*

Cat® PM310, PM312, PM313 Cold Planers

Standard and Optional Equipment

Features, standard and optional equipment may vary by region. Please check with your local Cat dealer for specific offerings and availability in your area.

	Standard	Optional		Standard	Optional
OPERATOR ENVIRONMENT			ROTOR SYSTEM		
Sliding operator station	✓		Automatic plunge-cut	✓	
Suspension seat	✓		Automatic grade and slope transition feature	✓	
Ergonomically-adjustable arm rest	✓		Obstacle jump	✓	
Ground control keypad	✓		Three cutting speeds	✓	
High-resolution LCD touchscreen display	✓		Powered rotor turning device (with pendant control)		✓
Additional high-resolution LCD touchscreen display		✓	System K Rotor – Coarse (18 mm)		✓
12-Volt power receptacle	✓		System K Rotor – Standard (15 mm)		✓
Powered canopy		✓	System K Rotor – Fine (8 mm)		✓
Windscreen		✓	Cat Diamond bits		✓
Exhaust diverter		✓	Pneumatic bit removal tool		✓
CAT® TECHNOLOGY			Tool holder extractor		✓
Remote Flash	✓		510 kg (1124 lb) ballast kit		✓
Remote Troubleshoot	✓		SERVICE AND MAINTENANCE		
Cat Grade and Slope	✓		Scheduled Oil Sampling (S•O•S SM) Ports	✓	
VisionLink® telematics	✓		Platform-level engine oil dipsticks	✓	
Sonic grade control sensors		✓	Rotor chamber water spray system	✓	
High-resolution LCD touchscreen display (for ground level grade controls)		✓	1260 L (332.9 gal) onboard water tank	✓	
CONVEYOR			Side water fill valve	✓	
Dust extraction system		✓	Water tank fill pump	✓	
Hydraulically folding conveyor		✓	Air compressor		✓
Mechanically folding conveyor		✓	Accessory drive system		✓
Additional spray bars (dust control)		✓	High pressure washdown		✓
POWERTRAIN			Low pressure washdown		✓
Engine Idle Speed Management	✓		Additional water spray system (dust control)		✓
High capacity cooling system	✓		SAFETY AND SECURITY		
Automatic Load Control	✓		Platform handrails	✓	
HYDRAULIC SYSTEM			Signaling/warning horn	✓	
Traction Control	✓		Halogen work lighting		✓
Cat Bio HYDO™ Advanced biodegradable hydraulic oil		✓	Wide-dispersion LED work lighting		✓
High ambient hydraulic oil		✓	Warning beacon (fixed)		✓
			LED roading lights		✓
			Truck signal lights		✓
			Remote cameras (rear back up, front conveyor, left and/or right cutting edges, magnetic mount)		✓

Cat® PM310, PM312, PM313 Cold Planers

Technical Specifications

Weights

	PM310		PM312		PM313	
	kg	lb	kg	lb	kg	lb
Operating Weight	20 924	46,131	21 213	46,766	21 267	46,886
Transport Weight	20 516	45,230	20 804	45,865	20 859	45,986

Weights shown are approximate:

- Operating weight includes base machine with 75 kg (165 lb) operator, all standard equipment, power canopy, dust abatement system, high pressure wash system, 15 mm rotor, 510 kg (1124 lb) ballast kit, pneumatic compressor, 50% water, 50% fuel and full operating fluids.
- Transport weight includes base machine, all standard equipment, power canopy, dust abatement system, high pressure wash system, 15 mm rotor, 510 kg (1124 lb) ballast kit, pneumatic compressor, empty water, full fuel and other operating fluids.

Powertrain

Engine Model	Cat C9.3B	
Cylinders	6	
Emission Standards	Brazil MAR-1, equivalent to U.S. EPA Tier 3 and EU Stage IIIA	
Gross Power – SAE J1995:2014	256 kW	343 hp
Engine Power – ISO 14396:2002	253 kW	339 hp
Build Number	02C	
Maximum Milling Speed	33 m/min	108 ft/min
Maximum Travel Speed	5.5 km/h	3.4 mph

Cutting System

Milling Width		
PM310	1000 mm	39.4 in
PM312	1225 mm	48.2 in
PM313	1300 mm	51.2 in
Number of Bits (15 mm spacing)		
PM310	91	
PM312	106	
PM313	111	
Maximum Cutting Depth	330 mm	13 in
Rotor Speeds	97 / 109 / 121 rpm	
Minimum Left Cutting Radius	4.14 m	13.58 ft
Minimum Right Cutting Radius	1.92 m	6.30 ft

Service Refill Capacities


Fuel Tank	522 L	137.9 gal
Cooling System	64 L	16.9 gal
Engine Oil	30 L	7.9 gal
Hydraulic Oil	55 L	14.5 gal
Water Tank	1260 L	332.9 gal

Operating Dimensions

A Overall Length	11.11 m	36.45 ft
B Machine Width (leg in)	2.18 m	7.15 ft
B' Machine Width (leg out)	2.54 m	8.33 ft
C Machine Height (rotor at scratch)	5.15 m	16.90 ft
D Height to Optional Canopy	3.75 m	12.30 ft
E Maximum Truck Clearance	4.70 m	15.42 ft
F Conveyor Length	7.08 m	23.23 ft
G Conveyor Swing	±60° from center	

Shipping Dimensions

H Transport Length (conveyor folded)	9.32 m	30.58 ft
B' Transport Width (leg out)	2.54 m	8.33 ft
D' Transport Height (rotor at scratch and canopy lowered)	3.00 m	9.84 ft
I Length (track to track)	4.26 m	13.98 ft
J Length of Machine (rear to front track)	5.04 m	16.54 ft
K Length of Base Machine	5.90 m	19.36 ft

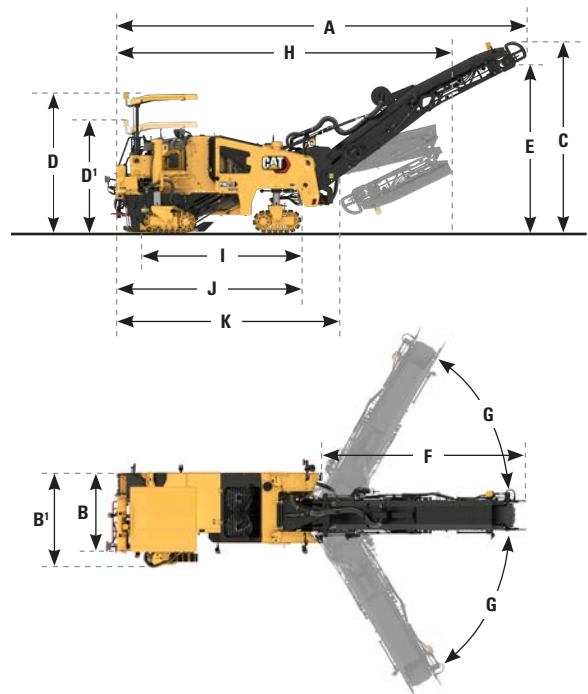

Cat® PM310, PM312, PM313 Cold Planers

Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit www.caterpillar.com/en/company/sustainability.html.

ENGINE

- The Cat 9.3B meets Brazil MAR-1, equivalent to U.S. EPA Tier 3 and EU Stage IIIA emission standards.
- Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels* up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

PAINT

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

SOUND PERFORMANCE

With cooling fan speed at 70% of maximum value:

Operator Sound Pressure Level (ISO 6396:2008) – 94 dB(A)

Exterior Sound Power Level (ISO 6395:2008) – 111 dB(A)

- The dynamic operator sound pressure level measurements are performed according to the dynamic test procedures that are specified in ISO 6396:2008.
- The dynamic spectator sound power level measurements are performed according to the dynamic test procedures that are specified in ISO 6395:2008.
- Hearing protection may be needed when operating with an open operator station for extended periods or in a noisy environment.

OILS AND FLUIDS

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

FEATURES AND TECHNOLOGY

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Advanced hydraulic systems balance power and efficiency
 - Adjustable rotor speeds allow for milling at lower engine speeds
 - Engine Idle Speed Management allows the machine to idle at the lowest possible RPM
 - The variable-speed cooling fan operates at the lowest speed for optimal cooling
 - System K rotor efficiently removes material and reduces drag
 - Cat Diamond bits are designed to stay sharp, last significantly longer than a carbide bit and maintains cutting efficiency
 - The Standby/Resume feature pauses machine functions and lowers engine speed during truck exchanges
 - Extended maintenance intervals reduce fluid and filter consumption
 - Remote Flash and Remote Troubleshoot

RECYCLING

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage (Track Undercarriage)
Steel	79.95%
Iron	7.44%
Nonferrous Metal	4.00%
Mixed Metal	0.55%
Mixed-Metal and Nonmetal	1.14%
Plastic	3.64%
Rubber	0.94%
Mixed Nonmetallic	0.01%
Fluid	1.06%
Other	0.72%
Uncategorized	0.55%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 95%

Cat® PM310, PM312, PM313 Cold Planers



For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2024 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

QEHQ3141-03 (12-2024)
Build Number: 02C
(Afr-ME, Eurasia, Aus-NZ, Indonesia,
Hong Kong, Pacific Islands, SE Asia, Taiwan,
Thailand, S Am [excl. Chile, Colombia])

