



333

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	3
Sound Performance	3
Operating Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Working Ranges	6
Reach Boom Lift Capacities	7
Mass Boom Lift Capacities	15
SLR Boom Lift Capacities	19
Bucket Specifications and Compatibility:	
Africa, Middle East, Eurasia	25
Indonesia	26
South America	27
Southeast Asia	28
Pacific Islands	29
Attachments Offering Guide:	
Africa, Middle East	30
Eurasia	36
South America	42
Southeast Asia, Indonesia	48
Standard and Optional Equipment	49
Dealer Installed Kits and Attachments	51
333 Environmental Declaration	52

333 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C7.1	
Net Power		
ISO 9249	193.8 kW	260 hp
ISO 9249 (DIN)	263 hp (metric)	
Engine Power		
ISO 14396	195 kW	261 hp
ISO 14396 (DIN)	265 hp (metric)	
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.01 L	428 in ³
Biodiesel Capability	Up to B20 ⁽¹⁾	

- Cat C7.1 engine emits equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
- Recommended for use up to 4500 m (14,764 ft) altitude with engine power derate above 3000 m (9,842.5 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 2,000 rpm.

⁽¹⁾Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels** up to:

- ✓ 100% biodiesel FAME (fatty acid methyl ester)*
- ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

*For use of blends higher than 20% biodiesel, consult your Cat dealer.

**Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

Swing Mechanism

Swing Speed	11.5 rpm	
Maximum Swing Torque	111 kN·m	81,869 lbf·ft

Weights

Operating Weight	32 600 kg	71,800 lb
------------------	-----------	-----------

- Long undercarriage, HD Reach boom, HD R3.2 (10'6") stick, HD 2.0 m³ (2.62 yd³) bucket, 600 mm (24") triple grouser shoes and 7700 kg (16,980 lb) counterweight.

Operating Weight	32 100 kg	70,900 lb
------------------	-----------	-----------

- Long undercarriage, Mass boom, M2.5 (8'2") stick, HD 2.36 m³ (3.08 yd³) bucket, 600 mm (24") triple grouser shoes and 7700 kg (16,980 lb) counterweight.

Track

Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	800 mm	31 in
Number of Shoes (each side)	50	
Number of Track Rollers (each side)	9	
Number of Carrier Rollers (each side)	2	

Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.9 km/h	3.7 mph
Maximum Drawbar Pull	248 kN	55,820 lbf

Hydraulic System

Main System – Maximum Flow – Implement	560 L/min (280 × 2 pumps)	148 gal/min (74 × 2 pumps)
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	29 800 kPa	4,321 psi
Boom Cylinder – Bore	140 mm	6 in
Boom Cylinder – Stroke	1407 mm	55 in
Stick Cylinder – Bore	160 mm	6 in
Stick Cylinder – Stroke	1646 mm	65 in
Bucket Cylinder – Bore	145 mm	6 in
Bucket Cylinder – Stroke	1151 mm	45 in

Service Refill Capacities

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	11.5 L	3.0 gal
Final Drive (each)	4.5 L	1.2 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank (including suction pipe)	147 L	38.8 gal

333 Hydraulic Excavator Specifications

Standards

Brakes	ISO 10265:2008
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008
Cab/Falling Object Guard System (FOGS) (optional)	ISO 10262:1998 – Level II

Sound Performance

ISO 6395 (external)	103 dB(A)
ISO 6396 (inside cab)	73 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Operating Weights and Ground Pressures

Base Machine Configurations	600 mm (24") Double Grouser Track Shoes		600 mm (24") Triple Grouser Shoes		700 mm (28") Triple Grouser Shoes		800 mm (31") Triple Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
Base Frame with Track Rollers and Carrier Rollers	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
7700 kg (16,980 lb) Counterweight and Long Undercarriage Base Machine								
HD Reach Boom + HD R3.2 (10'6") Stick + 2.0 m ³ (2.62 yd ³) HD Bucket	32 900 (72,500)	63 (9.1)	32 600 (71,800)	62 (9.0)	32 900 (72,600)	54 (7.8)	33 500 (73,900)	48 (6.9)
HD Reach Boom + HD R2.8 (9'2") Stick + 2.0 m ³ (2.62 yd ³) HD Bucket	32 800 (72,300)	62 (9.1)	32 500 (71,600)	62 (9.0)	32 800 (72,400)	54 (7.8)	33 500 (73,700)	48 (6.9)
Mass Boom + M2.5 (8'2") Stick + 2.36 m ³ (3.08 yd ³) HD Bucket	32 500 (71,700)	62 (9.0)	32 100 (70,900)	61 (8.9)	32 500 (71,600)	53 (7.7)	33 100 (73,000)	47 (6.8)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

333 Hydraulic Excavator Specifications

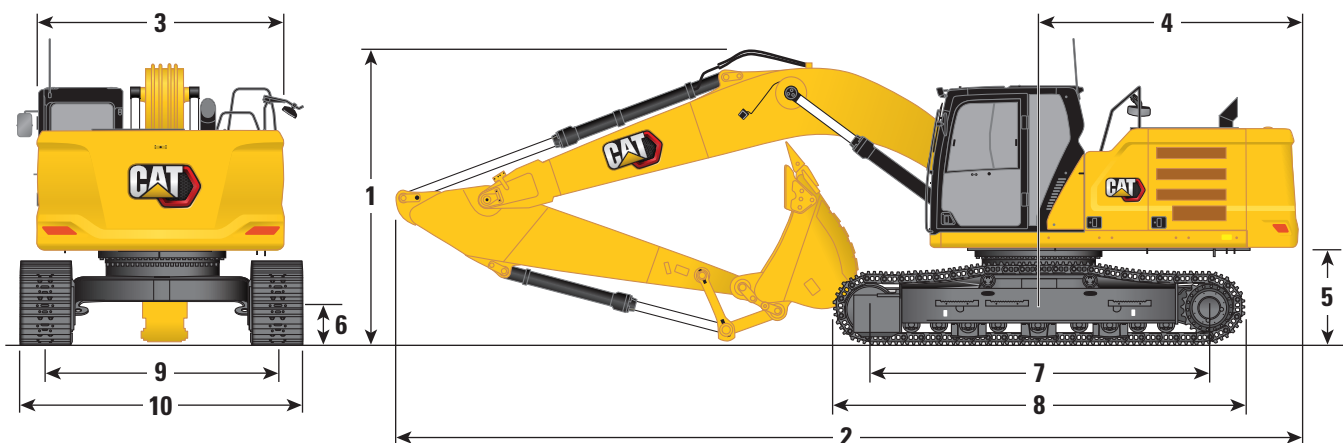
Major Component Weights

	kg	lb
Base Machine Weight (with 7700 kg [16,980 lb] counterweight, upper frame, long undercarriage with track rollers and two boom cylinders – does not include boom, stick, bucket, stick cylinder, bucket cylinder, tracks, fuel tank and operator)	22 130	48,770
Track Shoes:		
600 mm (24") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	3650	8,040
600 mm (24") Width, 14.5 mm (0.57") Thick Double Grouser Track Shoes	3980	8,800
700 mm (28") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	3990	8,790
800 mm (31") Width, 13 mm (0.51") Thick, Triple Grouser Track Shoes with Step Extension	4610	10,160
Two Boom Cylinders	500	1,100
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	470	1,040
Counterweight:		
7700 kg (16,980 lb) Counterweight	7700	16,970
Booms (including lines, pins, stick cylinder):		
6.15 m (20'2") HD Reach Boom	2770	6,110
5.55 m (18'2") Mass Boom	2390	5,270
10.2 m (33'6") Super Long Reach Boom	3250	7,160
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
R2.8DB (9'2") HD Reach Stick	1780	3,920
R3.2DB (10'6") HD Reach Stick	1870	4,120
M2.5DB (8'2") Mass Stick (with rebar)	1730	3,800
SLR7.85A (25'9") Super Long Reach Stick	1580	3,480
Buckets (without linkage, with tips and side cutters):		
1.64 m ³ (2.15 yd ³) SDS, DB Linkage	1770	3,900
1.88 m ³ (2.46 yd ³) HD, DB Linkage	1680	3,700
1.91 m ³ (2.50 yd ³) SDS, DB Linkage	1930	4,250
2.0 m ³ (2.62 yd ³) HD, DB Linkage	1680	3,700
2.36 m ³ (3.08 yd ³) HD, DB Linkage	1790	3,950
2.4 m ³ (3.13 yd ³) HD, DB Linkage	1850	4,100
2.6 m ³ (3.40 yd ³) HD, DB Linkage	1920	4,230
0.57 m ³ (0.75 yd ³) DC, A Linkage	390	860
0.74 m ³ (0.97 yd ³) DC, A Linkage	460	1,010
Quick Couplers:		
Pin Grabber QC CB without Pins	500	1,100
Pin Grabber QC CB with Pins	530	1,170

333 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

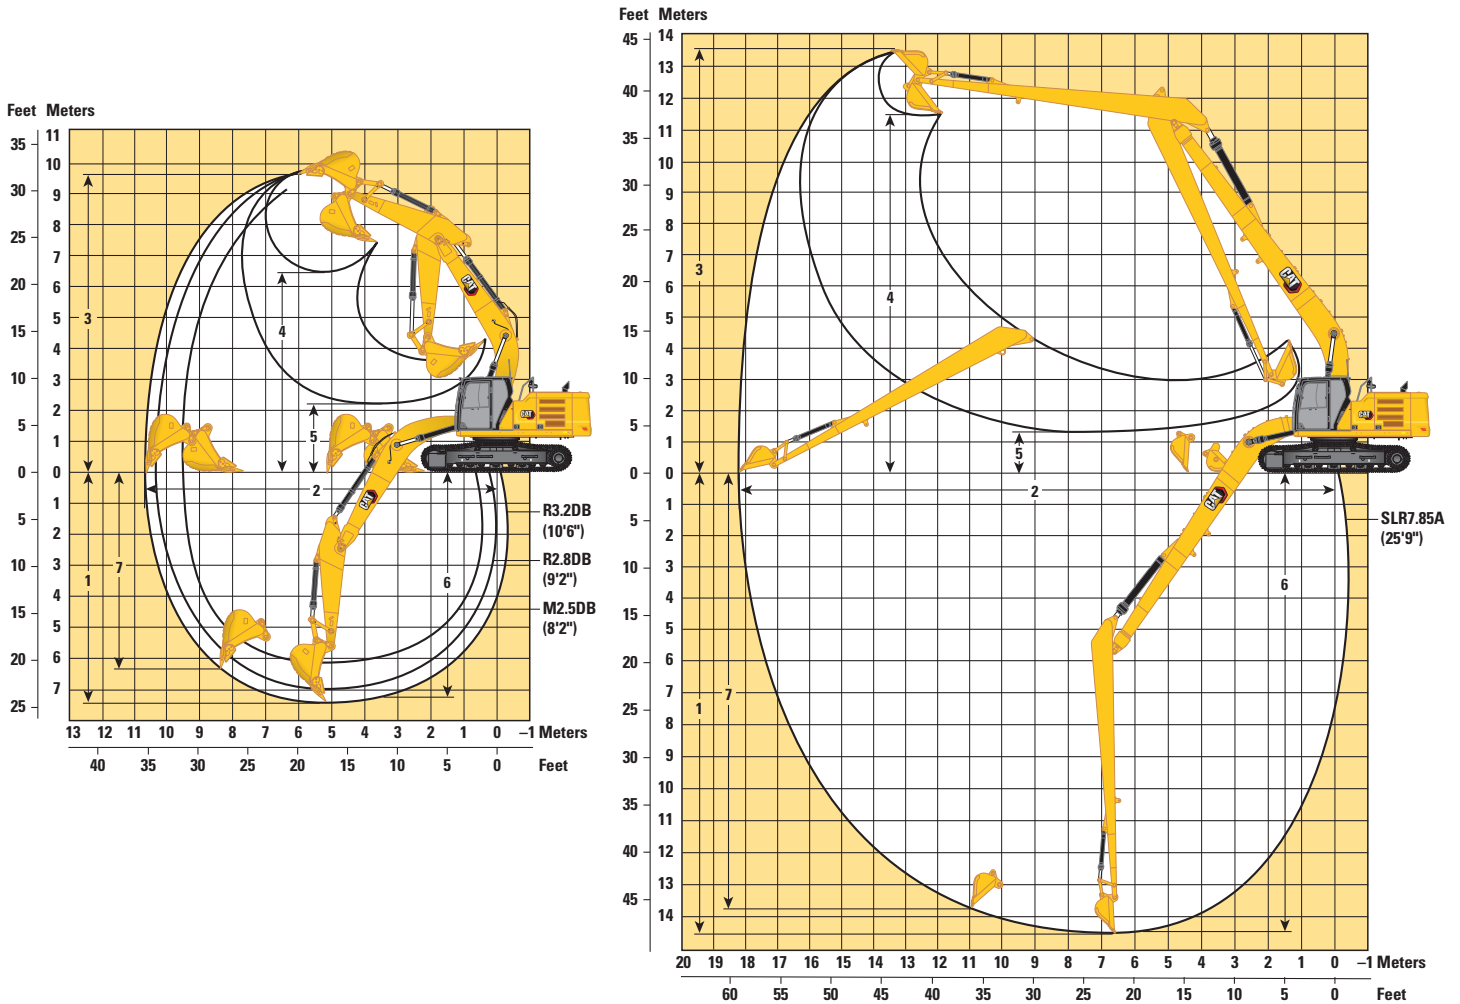


Boom Options	HD Reach Boom 6.15 m (20'2")		Mass Boom 5.55 m (18'2")		SLR Boom 10.2 m (33'6")			
Stick Options	HD Reach Stick HD R2.8DB (9'2")		HD R3.2DB (10'6")		Mass Stick M2.5DB (8'2")		SLR Stick SLR7.85A (25'9")	
1 Machine Height:								
Top of Cab Height	3060 mm	10'0"	3060 mm	10'0"	3060 mm	10'0"	3060 mm	10'0"
Top of FOGS Height	3200 mm	10'6"	3200 mm	10'6"	3200 mm	10'6"	3200 mm	10'6"
Handrail Height	3060 mm	10'0"	3060 mm	10'0"	3060 mm	10'0"	3060 mm	10'0"
With Boom/Stick/Bucket Installed	3650 mm	12'0"	3580 mm	11'9"	3530 mm	11'7"	3230 mm	10'7"
With Boom/Stick Installed	3650 mm	12'0"	3580 mm	11'9"	3440 mm	11'3"	3230 mm	10'7"
With Boom Installed	3060 mm	10'0"	3060 mm	10'0"	3060 mm	10'0"	3060 mm	10'0"
2 Machine Length:								
With Boom/Stick/Bucket Installed	10 450 mm	34'3"	10 450 mm	34'3"	9870 mm	32'5"	14 480 mm	47'6"
With Boom/Stick Installed	10 450 mm	34'3"	10 450 mm	34'3"	9850 mm	32'4"	14 480 mm	47'6"
With Boom Installed	9230 mm	30'3"	9230 mm	30'3"	8600 mm	28'3"	13 390 mm	43'11"
3 Upperframe Width	2930 mm	9'7"	2930 mm	9'7"	2930 mm	9'7"	2930 mm	9'7"
4 Tail Swing Radius	3130 mm	10'3"	3130 mm	10'3"	3130 mm	10'3"	3130 mm	10'3"
5 Counterweight Clearance	1120 mm	3'8"	1120 mm	3'8"	1120 mm	3'8"	1120 mm	3'8"
6 Ground Clearance	480 mm	1'7"	480 mm	1'7"	490 mm	1'7"	480 mm	1'7"
7 Track Length – Length to Center of Rollers	3990 mm	13'1"	3990 mm	13'1"	3990 mm	13'1"	3990 mm	13'1"
8 Track Length – Overall Length	4860 mm	15'11"	4860 mm	15'11"	4860 mm	15'11"	4860 mm	15'11"
9 Track Gauge – Extended	2740 mm	9'0"	2740 mm	9'0"	2740 mm	9'0"	2740 mm	9'0"
10 Undercarriage Width:								
600 mm (24") Shoes	3340 mm	10'11"	3340 mm	10'11"	3340 mm	10'11"	3340 mm	10'11"
700 mm (28") Shoes	3440 mm	11'3"	3440 mm	11'3"	3440 mm	11'3"	3440 mm	11'3"
800 mm (31") Shoes	3540 mm	11'7"	3540 mm	11'7"	3540 mm	11'7"	3540 mm	11'7"
Bucket Type	HD		HD		HD		DC	
Bucket Capacity	2.0 m ³	2.62 yd ³	2.0 m ³	2.62 yd ³	2.36 m ³	3.09 yd ³	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1784 mm	5'10"	1784 mm	5'10"	1787 mm	5'10"	1073 mm	3'6"

333 Hydraulic Excavator Specifications

Working Ranges

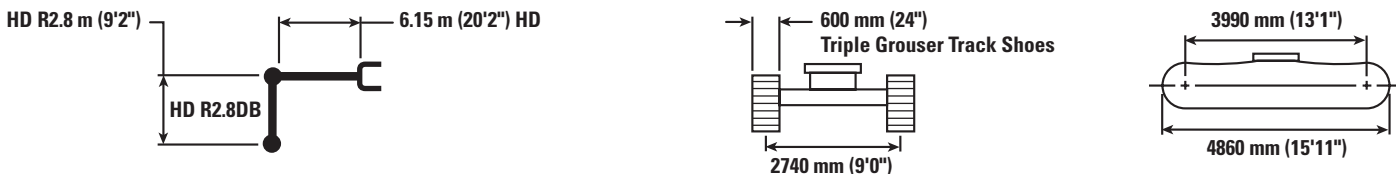
All dimensions are approximate and may vary depending on bucket selection.














Boom Options	HD Reach Boom 6.15 m (20'2")		Mass Boom 5.55 m (18'2")		SLR Boom 10.2 m (33'6")			
	HD Reach Stick		Mass Stick		SLR Stick			
Stick Options	HD R2.8DB (9'2")		HD R3.2DB (10'6")		M2.5DB (8'2")		SLR7.85A (25'9")	
1 Maximum Digging Depth	6970 mm	22'10"	7370 mm	24'2"	6130 mm	20'1"	14 590 mm	47'10"
2 Maximum Reach at Ground Line	10 390 mm	34'1"	10 680 mm	35'0"	9470 mm	31'1"	18 270 mm	59'11"
3 Maximum Cutting Height	9770 mm	32'1"	9660 mm	31'8"	9150 mm	30'0"	13 620 mm	44'8"
4 Maximum Loading Height	6540 mm	21'5"	6510 mm	21'4"	5970 mm	19'7"	11 590 mm	38'0"
5 Minimum Loading Height	2580 mm	8'6"	2170 mm	7'1"	2440 mm	8'0"	1330 mm	4'4"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	6800 mm	22'4"	7200 mm	23'7"	5940 mm	19'6"	14 490 mm	47'6"
7 Maximum Vertical Wall Digging Depth	5270 mm	17'3"	6240 mm	20'6"	4380 mm	14'4"	13 870 mm	45'6"
Bucket Digging Force (ISO)	197 kN	44,290 lbf	197 kN	44,290 lbf	211 kN	47,430 lbf	62 kN	13,940 lbf
Stick Digging Force (ISO)	164 kN	36,870 lbf	147 kN	33,050 lbf	153 kN	34,400 lbf	45 kN	10,120 lbf
Bucket Type	HD		HD		HD		DC	
Bucket Capacity	2.0 m ³	2.62 yd ³	2.0 m ³	2.62 yd ³	2.36 m ³	3.09 yd ³	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1784 mm	5'10"	1784 mm	5'10"	1787 mm	5'10"	1073 mm	3'6"

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in
												
7500 mm 25'0"	kg lb									*7450 *16,400	*7450 *16,400	6750 21'9"
6000 mm 20'0"	kg lb					*7600 *16,500	*7600 *16,500	*7300 *16,100	6900 14,750	*7300 *16,100	6500 14,450	7770 25'3"
4500 mm 15'0"	kg lb			*10 400 *22,400	*10 400 *22,400	*8500 *18,450	*8500 *18,450	*7600 *16,550	6750 14,500	*7350 *16,200	5650 12,450	8400 27'5"
3000 mm 10'0"	kg lb			*13 150 *28,300	*13 150 *28,300	*9750 *21,100	9050 19,550	*8200 *17,800	6550 14,050	7500 *16,500	5200 11,450	8720 28'6"
1500 mm 5'0"	kg lb			*15 250 *32,900	13 050 28,100	*10 900 *23,600	8650 18,650	*8800 *19,050	6350 13,600	7350 16,150	5050 11,100	8780 28'9"
0 mm 0'0"	kg lb			*15 950 *34,550	12 750 27,350	*11 600 *25,100	8400 18,100	9100 19,550	6200 13,300	7500 16,550	5150 11,350	8570 28'1"
-1500 mm -5'0"	kg lb	*12 000 *27,400	*12 000 *27,400	*15 600 *33,800	12 700 27,250	*11 600 *25,150	8300 17,900	9050 19,450	6150 13,200	8150 18,000	5600 12,300	8070 26'5"
-3000 mm -10'0"	kg lb	*19 450 *42,150	*19 450 *42,150	*14 300 *30,900	12 850 27,600	*10 800 *23,250	8400 18,050			*8450 *18,650	6550 14,500	7240 23'7"
-4500 mm -15'0"	kg lb	*15 350 *32,900	*15 350 *32,900	*11 550 *24,650	*11 550 *24,650					*8400 *18,450	*8400 *18,450	5900 19'1"



ISO 10567



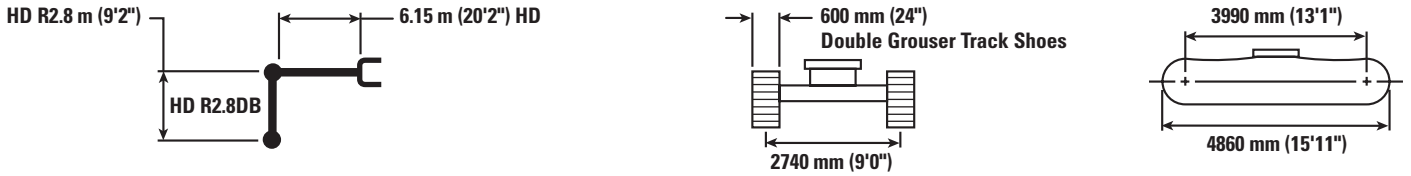
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in
												
7500 mm 25'0"	kg lb									*7450 *16,400	*7450 *16,400	6750 21'9"
6000 mm 20'0"	kg lb					*7600 *16,500	*7600 *16,500	*7300 *16,100	6950 14,900	*7300 *16,100	6550 14,600	7770 25'3"
4500 mm 15'0"	kg lb			*10 400 *22,400	*10 400 *22,400	*8500 *18,450	*8500 *18,450	*7600 *16,550	6800 14,650	*7350 *16,200	5700 12,550	8400 27'5"
3000 mm 10'0"	kg lb			*13 150 *28,300	*13 150 *28,300	*9750 *21,100	9150 19,700	*8200 *17,800	6600 14,200	*7500 *16,500	5250 11,600	8720 28'6"
1500 mm 5'0"	kg lb			*15 250 *32,900	13 150 28,350	*10 900 *23,600	8750 18,850	*8800 *19,050	6400 13,750	7400 16,300	5100 11,250	8780 28'9"
0 mm 0'0"	kg lb			*15 950 *34,550	12 850 27,600	*11 600 *25,100	8500 18,250	*9150 19,750	6250 13,450	7600 16,700	5200 11,450	8570 28'1"
-1500 mm -5'0"	kg lb	*12 000 *27,400	*12 000 *27,400	*15 600 *33,800	12 800 27,500	*11 600 *25,150	8400 18,050	*9050 *19,550	6200 13,350	*8250 *18,150	5650 12,400	8070 26'5"
-3000 mm -10'0"	kg lb	*19 450 *42,150	*19 450 *42,150	*14 300 *30,900	12 950 27,850	*10 800 *23,250	8450 18,250			*8450 *18,650	6600 14,650	7240 23'7"
-4500 mm -15'0"	kg lb	*15 350 *32,900	*15 350 *32,900	*11 550 *24,650	*11 550 *24,650					*8400 *18,450	*8400 *18,450	5900 19'1"



ISO 10567



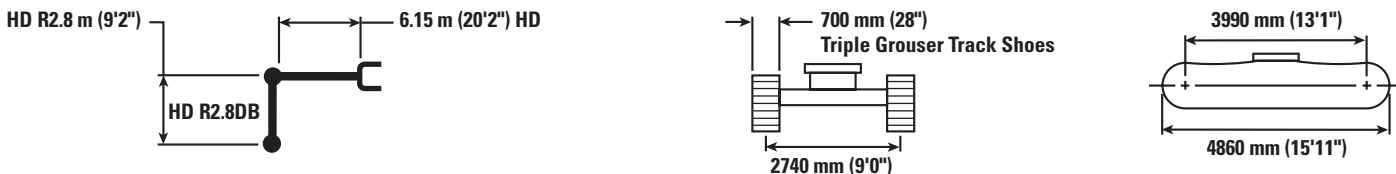
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in
												
7500 mm 25'0"	kg lb									*7450 *16,400	*7450 *16,400	6750 21'9"
6000 mm 20'0"	kg lb					*7600 *16,500	*7600 *16,500	*7300 *16,100	6950 14,900	*7300 *16,100	6550 14,600	7770 25'3"
4500 mm 15'0"	kg lb			*10 400 *22,400	*10 400 *22,400	*8500 *18,450	*8500 *18,450	*7600 *16,550	6800 14,650	*7350 *16,200	5700 12,600	8400 27'5"
3000 mm 10'0"	kg lb			*13 150 *28,300	*13 150 *28,300	*9750 *21,100	9150 19,700	*8200 *17,800	6600 14,200	*7500 *16,500	5250 11,600	8720 28'6"
1500 mm 5'0"	kg lb			*15 250 *32,900	13 150 28,350	*10 900 *23,600	8750 18,850	*8800 *19,050	6400 13,750	7400 16,300	5100 11,250	8780 28'9"
0 mm 0'0"	kg lb			*15 950 *34,550	12 850 27,600	*11 600 *25,100	8500 18,250	*9150 19,750	6250 13,450	7600 16,700	5200 11,450	8570 28'1"
-1500 mm -5'0"	kg lb	*12 000 *27,400	*12 000 *27,400	*15 600 *33,800	12 800 27,500	*11 600 *25,150	8400 18,050	*9050 *19,550	6200 13,350	*8250 *18,150	5650 12,400	8070 26'5"
-3000 mm -10'0"	kg lb	*19 450 *42,150	*19 450 *42,150	*14 300 *30,900	12 950 27,850	*10 800 *23,250	8450 18,250			*8450 *18,650	6600 14,650	7240 23'7"
-4500 mm -15'0"	kg lb	*15 350 *32,900	*15 350 *32,900	*11 550 *24,650	*11 550 *24,650					*8400 *18,450	*8400 *18,450	5900 19'1"



ISO 10567



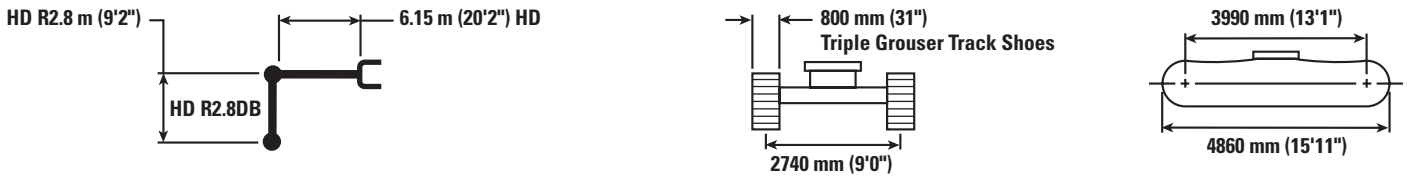
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in
												
7500 mm 25'0"	kg lb									*7450 *16,400	*7450 *16,400	6750 21'9"
6000 mm 20'0"	kg lb					*7600 *16,500	*7600 *16,500	*7300 *16,100	7050 15,150	*7300 *16,100	6650 14,800	7770 25'3"
4500 mm 15'0"	kg lb			*10 400 *22,400	*10 400 *22,400	*8500 *18,450	*8500 *18,450	*7600 *16,550	6950 14,900	*7350 *16,200	5800 12,800	8400 27'5"
3000 mm 10'0"	kg lb			*13 150 *28,300	*13 150 *28,300	*9750 *21,100	9300 20,050	*8200 *17,800	6700 14,450	*7500 *16,500	5350 11,800	8720 28'6"
1500 mm 5'0"	kg lb			*15 250 *32,900	13 400 28,850	*10 900 *23,600	8900 19,150	*8800 *19,050	6500 14,000	7550 16,600	5200 11,450	8780 28'9"
0 mm 0'0"	kg lb			*15 950 *34,550	13 050 28,100	*11 600 *25,100	8650 18,600	*9150 *19,850	6350 13,700	7750 17,000	5300 11,700	8570 28'1"
-1500 mm -5'0"	kg lb	*12 000 *27,400	*12 000 *27,400	*15 600 *33,800	13 050 28,000	*11 600 *25,150	8550 18,400	*9050 *19,550	6300 13,600	*8250 *18,150	5750 12,650	8070 26'5"
-3000 mm -10'0"	kg lb	*19 450 *42,150	*19 450 *42,150	*14 300 *30,900	13 200 28,350	*10 800 *23,250	8600 18,550			*8450 *18,650	6750 14,900	7240 23'7"
-4500 mm -15'0"	kg lb	*15 350 *32,900	*15 350 *32,900	*11 550 *24,650	*11 550 *24,650					*8400 *18,450	*8400 *18,450	5900 19'1"



ISO 10567



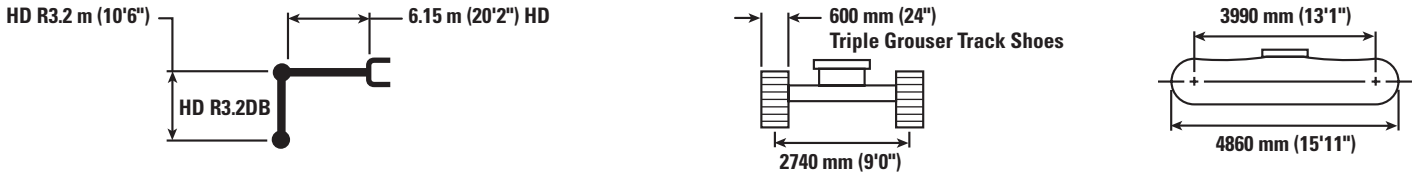
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		1500 mm (5'0")		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")		9000 mm (30'0")		mm ft/in		
7500 mm 25'0"	kg lb													*6750 *14,950	*6750 *14,950	7110 23'0"
6000 mm 20'0"	kg lb									*6800 *14,950	*6800 14,900			*6550 *14,400	6100 13,600	8080 26'4"
4500 mm 15'0"	kg lb							*8000 *17,400	*8000 *17,400	*7200 *15,700	6800 14,600			*6600 *14,500	5350 11,850	8690 28'5"
3000 mm 10'0"	kg lb					*12 350 *26,600	*12 350 *26,600	*9350 *20,150	9150 19,700	*7850 *17,050	6550 14,100			*6850 *15,100	4950 10,900	9000 29'6"
1500 mm 5'0"	kg lb					*14 700 *31,700	13 150 28,350	*10 550 *22,850	8700 18,750	*8550 *18,500	6350 13,600	7050	4850	6950 15,350	4800 10,550	9060 29'8"
0 mm 0'0"	kg lb					*15 800 *34,150	12 750 27,350	*11 400 *24,650	8400 18,050	*9000 19,500	6150 13,250			7150 15,700	4900 10,750	8860 29'0"
-1500 mm -5'0"	kg lb	*8300 *18,550	*8300 *18,550	*12 650 *28,650	*12 650 *28,650	*15 750 *34,100	12 600 27,100	*11 600 *25,150	8250 17,800	8950 19,300	6050 13,100			7700 16,950	5250 11,550	8380 27'5"
-3000 mm -10'0"	kg lb	*14 250 *31,900	*14 250 *31,900	*19 950 *44,800	*19 950 *44,800	*14 750 *31,850	12 700 27,300	*11 050 *23,850	8300 17,850	*8400 18,500	6150			*8300 *18,250	6050 13,400	7570 24'8"
-4500 mm -15'0"	kg lb			*16 950 *36,450	*16 950 *36,450	*12 450 *26,700	*12 450 *26,700	*9150 *19,400	8500 18,400					*8500 *18,700	7950 17,850	6320 20'5"



ISO 10567



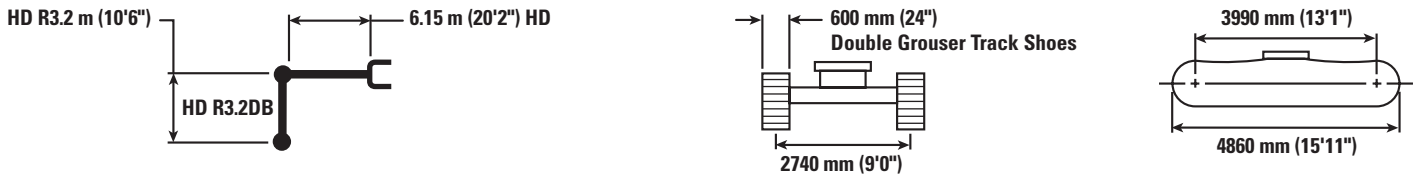
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		1500 mm (5'0")		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")		9000 mm (30'0")		mm ft/in		
7500 mm 25'0"	kg lb													*6750 *14,950	*6750 *14,950	7110 23'0"
6000 mm 20'0"	kg lb									*6800 *14,950	*6800 *14,950			*6550 *14,400	6200 13,750	8080 26'4"
4500 mm 15'0"	kg lb							*8000 *17,400	*8000 *17,400	*7200 *15,700	6850 14,750			*6600 *14,500	5400 11,950	8690 28'5"
3000 mm 10'0"	kg lb					*12 350 *26,600	*12 350 *26,600	*9350 *20,150	9250 19,850	*7850 *17,050	6650 14,250			*6850 *15,100	5000 11,000	9000 29'6"
1500 mm 5'0"	kg lb					*14 700 *31,700	13 300 28,600	*10 550 *22,850	8800 18,900	*8550 *18,500	6400 13,750	7100 4900		7050 15,500	4850 10,700	9060 29'8"
0 mm 0'0"	kg lb					*15 800 *34,150	12 850 27,650	*11 400 *24,650	8500 18,250	*9000 *19,500	6200 13,350			7200 15,850	4950 10,850	8860 29'0"
-1500 mm -5'0"	kg lb	*8300 *18,550	*8300 *18,550	*12 650 *28,650	*12 650 *28,650	*15 750 *34,100	12 750 27,350	*11 600 *25,150	8350 17,950	9050 19,500	6150 13,200		7750 17,100	5300 11,650	8380 27'5"	
-3000 mm -10'0"	kg lb	*14 250 *31,900	*14 250 *31,900	*19 950 *44,800	*19 950 *44,800	*14 750 *31,850	12 850 27,550	*11 050 *23,850	8350 18,000	*8400 18,000	6200		*8300 *18,250	6100 13,550	7570 24'8"	
-4500 mm -15'0"	kg lb			*16 950 *36,450	*16 950 *36,450	*12 450 *26,700	*12 450 *26,700	*9150 *19,400	8600 18,550				*8500 *18,700	8050 18,000	6320 20'5"	



ISO 10567



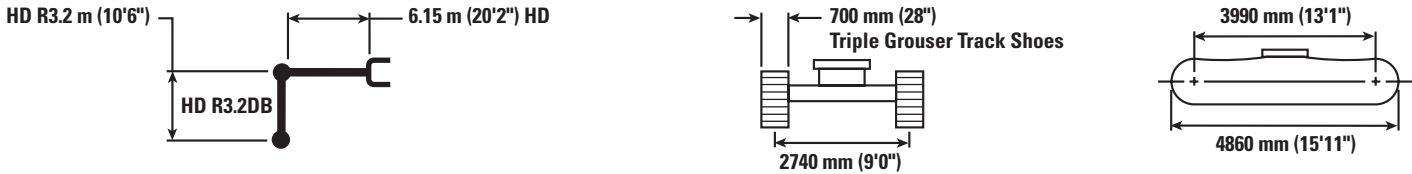
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		1500 mm (5'0")		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")		9000 mm (30'0")		mm ft/in		
7500 mm 25'0"	kg lb													*6750 *14,950	*6750 *14,950	7110 23'0"
6000 mm 20'0"	kg lb									*6800 *14,950	*6800 *14,950			*6550 *14,400	6200 13,750	8080 26'4"
4500 mm 15'0"	kg lb							*8000 *17,400	*8000 *17,400	*7200 *15,700	6850 14,750			*6600 *14,500	5400 11,950	8690 28'5"
3000 mm 10'0"	kg lb					*12 350 *26,600	*12 350 *26,600	*9350 *20,150	9250 19,900	*7850 *17,050	6650 14,250			*6850 *15,100	5000 11,000	9000 29'6"
1500 mm 5'0"	kg lb					*14 700 *31,700	13 300 28,600	*10 550 *22,850	8800 18,900	*8550 *18,500	6400 13,750	7100 4900		7050 15,500	4850 10,700	9060 29'8"
0 mm 0'0"	kg lb					*15 800 *34,150	12 850 27,650	*11 400 *24,650	8500 18,250	*9000 *19,500	6200 13,350			7200 15,850	4950 10,850	8860 29'0"
-1500 mm -5'0"	kg lb	*8300 *18,550	*8300 *18,550	*12 650 *28,650	*12 650 *28,650	*15 750 *34,100	12 750 27,350	*11 600 *25,150	8350 17,950	9050 19,500	6150 13,200		7750 17,100	5300 11,650	8380 27'5"	
-3000 mm -10'0"	kg lb	*14 250 *31,900	*14 250 *31,900	*19 950 *44,800	*19 950 *44,800	*14 750 *31,850	12 850 27,550	*11 050 *23,850	8350 18,000	*8400 18,000	6200		*8300 *18,250	6100 13,550	7570 24'8"	
-4500 mm -15'0"	kg lb			*16 950 *36,450	*16 950 *36,450	*12 450 *26,700	*12 450 *26,700	*9150 *19,400	8600 18,550				*8500 *18,700	8050 18,000	6320 20'5"	



ISO 10567



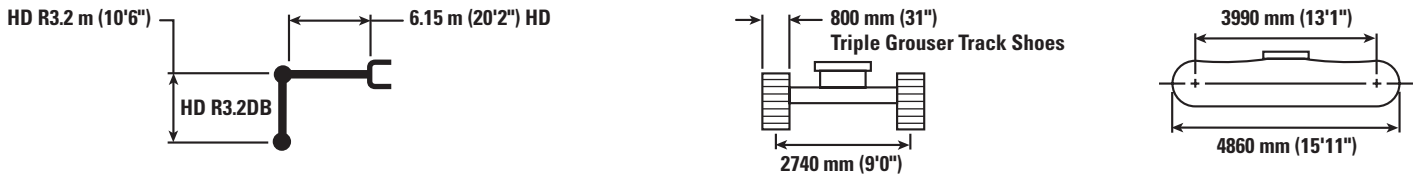
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		1500 mm (5'0")		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")		9000 mm (30'0")		mm ft/in		
7500 mm 25'0"	kg lb													*6750 *14,950	*6750 *14,950	7110 23'0"
6000 mm 20'0"	kg lb									*6800 *14,950	*6800 *14,950			*6550 *14,400	6300 14,000	8080 26'4"
4500 mm 15'0"	kg lb							*8000 *17,400	*8000 *17,400	*7200 *15,700	6950 15,000			*6600 *14,500	5500 12,150	8690 28'5"
3000 mm 10'0"	kg lb					*12 350 *26,600	*12 350 *26,600	*9350 *20,150	*9350 *20,150	*7850 *17,050	6750 14,500			*6850 *15,100	5100 11,200	9000 29'6"
1500 mm 5'0"	kg lb					*14 700 *31,700	13 500 29,100	*10 550 *22,850	8950 19,250	*8550 *18,500	6500 14,000	7250 5000		7200 15,800	4950 10,900	9060 29'8"
0 mm 0'0"	kg lb					*15 800 *34,150	13 100 28,100	*11 400 *24,650	8650 18,550	*9000 *19,500	6350 13,600			7350 16,150	5050 11,050	8860 29'0"
-1500 mm -5'0"	kg lb	*8300 *18,550	*8300 *18,550	*12 650 *28,650	*12 650 *28,650	*15 750 *34,100	12 950 27,850	*11 600 *25,150	8500 18,300	*9100 *19,650	6250 13,450		7900 17,450	5400 11,900	8380 27'5"	
-3000 mm -10'0"	kg lb	*14 250 *31,900	*14 250 *31,900	*19 950 *44,800	*19 950 *44,800	*14 750 *31,850	13 050 28,050	*11 050 *23,850	8500 18,350	*8400 18,350	6300		*8300 *18,250	6250 13,800	7570 24'8"	
-4500 mm -15'0"	kg lb			*16 950 *36,450	*16 950 *36,450	*12 450 *26,700	*12 450 *26,700	*9150 *19,400	8750 18,900				*12 450 *18,700	8200 18,350	6320 20'5"	



ISO 10567





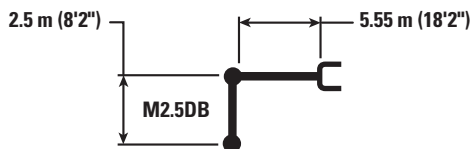
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.













Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



	3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in	
												
7500 mm 25'0"	kg									*7850	*7850	5510
	lb									*17,500	*17,500	17'7"
6000 mm 20'0"	kg				*8750	*8750				*7350	*7350	6720
	lb				*19,200	*19,200				*16,150	*16,150	21'10"
4500 mm 15'0"	kg		*11 150	*11 150	*9400	*9400				*7300	6950	7440
	lb		*24,000	*24,000	*20,500	*20,500				*16,000	15,350	24'3"
3000 mm 10'0"	kg		*13 800	*13 800	*10 550	9350	*9050	6750		*7550	6350	7810
	lb		*29,700	*29,700	*22,900	20,100	*19,750	14,450		*16,650	13,950	25'6"
1500 mm 5'0"	kg		*15 950	13 700	*11 650	9050	9500	6600		*8250	6150	7870
	lb		*34,400	29,500	*25,200	19,450	20,400	14,150		*18,100	13,550	25'9"
0 mm 0'0"	kg		*16 650	13 400	*12 200	8850	9400	6500		9150	6350	7630
	lb		*36,100	28,800	*26,450	19,000	20,200	14,000		20,150	13,950	25'0"
-1500 mm -5'0"	kg	*16 400	*16 400	*16 100	13 350	*11 950	8800			*9700	7050	7070
	lb	*37,250	*37,250	*34,850	28,700	*25,800	18,900			*21,350	15,500	23'1"
-3000 mm -10'0"	kg	*19 100	*19 100	*14 050	13 500	*10 100	8900			*9850	8750	6100
	lb	*41,400	*41,400	*30,250	29,100					*21,650	19,450	19'10"



ISO 10567





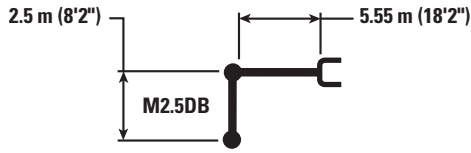
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.













Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



	3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in	
												
7500 mm 25'0"	kg									*7850	*7850	5510
	lb									*17,500	*17,500	17'7"
6000 mm 20'0"	kg				*8750	*8750				*7350	*7350	6720
	lb				*19,200	*19,200				*16,150	*16,150	21'10"
4500 mm 15'0"	kg		*11 150	*11 150	*9400	*9400				*7300	7000	7440
	lb		*24,000	*24,000	*20,500	*20,500				*16,000	15,500	24'3"
3000 mm 10'0"	kg		*13 800	*13 800	*10 550	9400	*9050	6800		*7550	6400	7810
	lb		*29,700	*29,700	*22,900	20,300	*19,750	14,600		*16,650	14,100	25'6"
1500 mm 5'0"	kg		*15 950	13 850	*11 650	9100	*9500	6650		*8250	6200	7870
	lb		*34,400	29,750	*25,200	19,600	20,600	14,300		*18,100	13,650	25'9"
0 mm 0'0"	kg		*16 650	13 500	*12 200	8900	9500	6550		9250	6400	7630
	lb		*36,100	29,100	*26,450	19,200	20,400	14,150		20,350	14,100	25'0"
-1500 mm -5'0"	kg	*16 400	*16 400	*16 100	13 500	*11 950	8850			*9700	7100	7070
	lb	*37,250	*37,250	*34,850	29,000	*25,800	19,050			*21,350	15,650	23'1"
-3000 mm -10'0"	kg	*19 100	*19 100	*14 050	13 650	10 100	9000			*9850	8800	6100
	lb	*41,400	*41,400	*30,250	29,350					*21,650	19,600	19'10"



ISO 10567





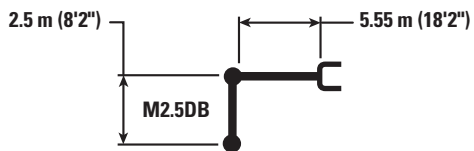
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in
												
7500 mm 25'0"	kg lb									*7850 *17,500	*7850 *17,500	5510 17'7"
6000 mm 20'0"	kg lb					*8750 *19,200	*8750 *19,200			*7350 *16,150	*7350 *16,150	6720 21'10"
4500 mm 15'0"	kg lb			*11 150 *24,000	*11 150 *24,000	*9400 *20,500	*9400 *20,500			*7300 *16,000	7000 15,500	7440 24'3"
3000 mm 10'0"	kg lb			*13 800 *29,700	*13 800 *29,700	*10 550 *22,900	9400 20,300	*9050 *19,750	6800 14,600	*7550 *16,650	6400 14,100	7810 25'6"
1500 mm 5'0"	kg lb			*15 950 *34,400	13 850 29,750	*11 650 *25,200	9100 19,600	*9500 20,600	6650 14,300	*8250 *18,100	6200 13,650	7870 25'9"
0 mm 0'0"	kg lb			*16 650 *36,100	13 500 29,100	*12 200 *26,450	8900 19,200	9500 20,400	6550 14,150	9250 20,350	6400 14,100	7630 25'0"
-1500 mm -5'0"	kg lb	*16 400 *37,250	*16 400 *37,250	*16 100 *34,850	13 500 29,000	*11 950 *25,800	8850 19,050			*9700 *21,350	7100 15,650	7070 23'1"
-3000 mm -10'0"	kg lb	*19 100 *41,400	*19 100 *41,400	*14 050 *30,250	13 650 29,350	*10 100	9000			*9850 *21,650	8800 19,600	6100 19'10"



ISO 10567





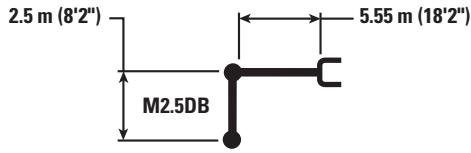
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")				mm ft/in
												
7500 mm 25'0"	kg lb									*7850 *17,500	*7850 *17,500	5510 17'7"
6000 mm 20'0"	kg lb					*8750 *19,200	*8750 *19,200			*7350 *16,150	*7350 *16,150	6720 21'10"
4500 mm 15'0"	kg lb			*11 150 *24,000	*11 150 *24,000	*9400 *20,500	*9400 *20,500			*7300 *16,000	7100 15,750	7440 24'3"
3000 mm 10'0"	kg lb			*13 800 *29,700	*13 800 *29,700	*10 550 *22,900	9550 20,600	*9050 *19,750	6900 14,850	*7550 *16,650	6500 14,350	7810 25'6"
1500 mm 5'0"	kg lb			*15 950 *34,400	14 050 30,250	*11 650 *25,200	9250 19,950	*9500 *20,600	6750 14,550	*8250 *18,100	6300 13,900	7870 25'9"
0 mm 0'0"	kg lb			*16 650 *36,100	13 750 29,550	*12 200 *26,450	9050 19,500	*9600 *20,750	6650 14,350	*9400 *20,700	6500 14,350	7630 25'0"
-1500 mm -5'0"	kg lb	*16 400 *37,250	*16 400 *37,250	*16 100 *34,850	13 700 29,450	*11 950 *25,800	9000 19,400			*9700 *21,350	7200 15,950	7070 23'1"
-3000 mm -10'0"	kg lb	*19 100 *41,400	*19 100 *41,400	*14 050 *30,250	13 850 29,850	*10 100	9150			*9850 *21,650	8950 19,950	6100 19'10"



ISO 10567



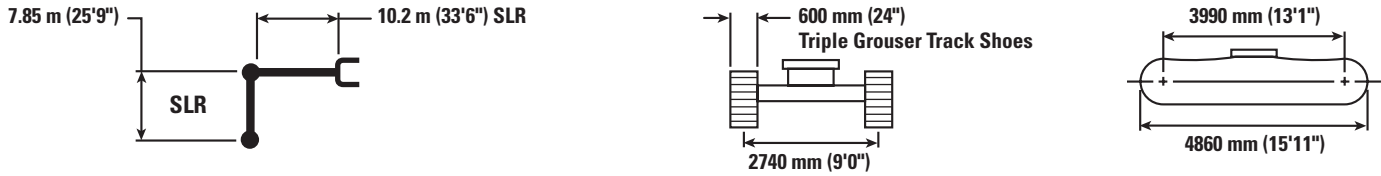
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		1500 mm (5'0")		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")		9000 mm (30'0")		mm ft/in			
12 000 mm 40'0"	kg lb													*1300 *2,850	*1300 *2,850	14 030 45'6"	
10 500 mm 35'0"	kg lb													*1250 *2,750	*1250 *2,750	15 010 48'10"	
9000 mm 30'0"	kg lb													*1250 *2,700	*1250 *2,700	15 780 51'6"	
7500 mm 25'0"	kg lb													*1250 *2,700	*1250 *2,700	16 370 53'6"	
6000 mm 20'0"	kg lb													*1250 *2,700	*1250 *2,700	16 810 55'0"	
4500 mm 15'0"	kg lb													*1250 *2,750	*1250 *2,750	17 110 56'1"	
3000 mm 10'0"	kg lb			*4000 *4000									*4100 *8,900	*4100 *8,900	*1300 *2,850	*1300 *2,850	17 270 56'7"
1500 mm 5'0"	kg lb			*1500 *3,450	*1500 *3,450	*5100 *12,000	*5100 *12,000	*7300 *15,750	*7300 *15,750	*5650 *12,250	*5650 *12,250	*4700 *10,150	*4700 *10,150	*1350 *2,950	*1350 *2,950	17 300 56'8"	
0 mm 0'0"	kg lb			*1650 *3,700	*1650 *3,700	*3550 *8,150	*3550 *8,150	*8200 *18,300	7500 16,200	*6450 *13,950	5650 12,150	*5250 *11,400	4450 9,600	*1450 *3,150	*1450 *3,150	17 190 56'4"	
-1500 mm -5'0"	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3500 *7,900	*3500 *7,900	*6450 *14,800	*6450 *14,800	*7100 *15,350	5300 11,400	*5750 *12,400	4200 9,000	*1550 *3,350	*1550 *3,350	16 960 55'7"	
-3000 mm -10'0"	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6200 *14,100	*6200 *14,100	*7550 *16,350	5050 10,850	*6100 *13,150	4000 8,600	*1650 *3,650	*1650 *3,650	16 580 54'3"	
-4500 mm -15'0"	kg lb	*2800 *6,250	*2800 *6,250	*3350 *7,450	*3350 *7,450	*4400 *9,950	*4400 *9,950	*6550 *14,850	*6550 *14,250	7700 16,600	4900 10,550	6000 12,900	3850 8,300	*1850 *4,050	1800 3,900	16 050 52'6"	
-6000 mm -20'0"	kg lb	*3450 *7,650	*3450 *7,650	*4000 *9,000	*4000 *9,000	*5150 *11,550	*5150 *11,550	*7200 *16,400	6600 14,250	7650 16,500	4850 10,450	5950 12,750	3800 8,200	*2050 *4,600	1900 4,150	15 360 50'2"	
-7500 mm -25'0"	kg lb	*4100 *9,200	*4100 *9,200	*4800 *10,700	*4800 *10,700	*6000 *13,500	*6000 *13,500	*8200 *18,700	6700 14,400	7700 16,550	4900 10,550	5950 12,800	3800 8,250	*2400 *5,400	2100 4,600	14 470 47'2"	
-9000 mm -30'0"	kg lb	*4850 *10,850	*4850 *10,850	*5650 *12,650	*5650 *12,650	*7000 *15,900	*7000 *15,900	*9500 *20,450	6850 14,750	*7600 *16,400	5000 10,750	6000 12,950	3900 8,350	*2950 *6,650	2350 5,250	13 360 43'5"	
-10 500 mm -35'0"	kg lb	*5650 *12,650	*5650 *12,650	*6600 *14,950	*6600 *14,950	*8300 *18,900	*8300 *18,900	*8750 *18,800	7050 15,250	*7100 *15,150	5150 11,100	*5850 *12,550	4000 8,650	*3900 *8,950	2800 6,350	11 960 38'7"	
-12 000 mm -40'0"	kg lb			*7800 *17,600	*7800 *17,600	*9700 *20,550	*9700 *20,550	*7600 *16,100	7400 16,000	*6200 *13,050	5400 11,700	*5050 *10,550	4250 9,200	*4300 *9,450	3650 8,400	10 140 32'4"	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

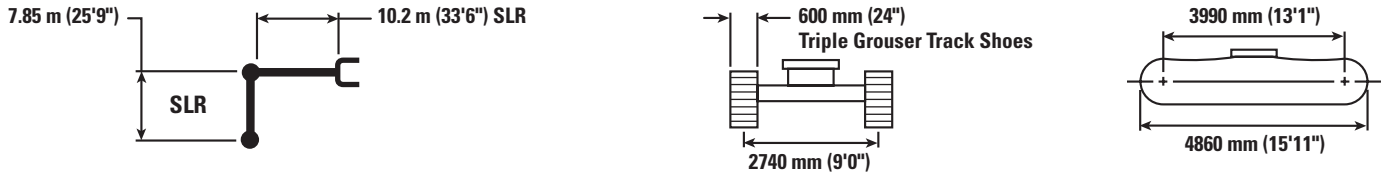
Lift capacity stays with ±5% for all available track shoes.















Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

333 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket (continued)



		10 500 mm (35'0")		12 000 mm (40'0")		13 500 mm (45'0")		15 000 mm (50'0")		16 500 mm (55'0")				mm ft/in
														
12 000 mm 40'0"	kg lb					*3,300	*3,300					*1300 *2,850	*1300 *2,850	14 030 45'6"
10 500 mm 35'0"	kg lb							*1250	*1250			*1250 *2,750	*1250 *2,750	15 010 48'10"
9000 mm 30'0"	kg lb							*2050 *3,900	*2050 *3,900			*1250 *2,700	*1250 *2,700	15 780 51'6"
7500 mm 25'0"	kg lb					*2600 *5,700	*2600 *5,700	*2550 *5,150	2500 *5,150			*1250 *2,700	*1250 *2,700	16 370 53'6"
6000 mm 20'0"	kg lb					*2750 *6,000	*2750 *6,000	*2700 *5,950	2450 5,200	*1650 *2,800	*1650 *2,800	*1250 *2,700	*1250 *2,700	16 810 55'0"
4500 mm 15'0"	kg lb			*3050 *6,650	*3050 *6,650	*2950 *6,400	2850 6,150	*2850 *6,200	2350 5,050	*2100 *3,800	1950 *3,800	*1250 *2,750	*1250 *2,750	17 110 56'1"
3000 mm 10'0"	kg lb	*3650 *7,950	*3650 *7,950	*3350 *7,300	3350 7,150	*3150 *6,850	2750 5,850	*3000 *6,550	2300 4,850	*2350 *4,450	1900 4,050	*1300 *2,850	*1300 *2,850	17 270 56'7"
1500 mm 5'0"	kg lb	*4100 *8,850	3850 8,250	*3650 *7,950	3150 6,750	*3350 *7,350	2600 5,600	*3150 *6,850	2200 4,650	*2550 *4,800	1850 3,900	*1350 *2,950	*1350 *2,950	17 300 56'8"
0 mm 0'0"	kg lb	*4500 *9,750	3600 7,750	*3950 *8,600	3000 6,400	*3600 *7,800	2500 5,350	3150 6,800	2100 4,500	*2550 *4,750	1800 3,800	*1450 *3,150	*1450 *3,150	17 190 56'4"
-1500 mm -5'0"	kg lb	*4850 *10,500	3400 7,350	*4250 9,150	2850 6,100	3600 7,750	2400 5,100	3100 6,650	2050 4,350	*2350 *4,150	1750 3,700	*1550 *3,350	*1550 *3,350	16 960 55'7"
-3000 mm -10'0"	kg lb	4950 10,700	3250 7,000	4150 8,900	2700 5,850	3550 7,550	2300 4,950	3050 6,500	2000 4,250	*1800	1700	*1650 *3,650	*1650 *3,650	16 580 54'3"
-4500 mm -15'0"	kg lb	4850 10,450	3150 6,800	4050 8,750	2650 5,700	3450 7,450	2250 4,850	3000 6,450	1950 4,150			*1850 *4,050	1800 3,900	16 050 52'6"
-6000 mm -20'0"	kg lb	4800 10,350	3100 6,700	4050 8,650	2600 5,600	3450 7,400	2250 4,800	*3000 *4,950	1950 4,200			*2050 *4,600	1900 4,150	15 360 50'2"
-7500 mm -25'0"	kg lb	4800 10,350	3100 6,700	4050 8,700	2600 5,650	3450 7,500	2250 4,850					*2400 *5,400	2100 4,600	14 470 47'2"
-9000 mm -30'0"	kg lb	4850 10,500	3150 6,850	4100 8,850	2700 5,750							*2950 *6,650	2350 5,250	13 360 43'5"
-10 500 mm -35'0"	kg lb	*4900 *10,450	3300 7,100									*3900 *8,950	2800 6,350	11 960 38'7"
-12 000 mm -40'0"	kg lb											*4300 *9,450	3650 8,400	10 140 32'4"



ISO 10567



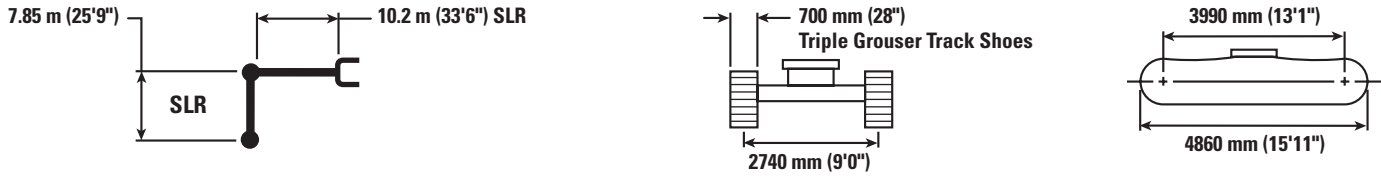
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		1500 mm (5'0")		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")		9000 mm (30'0")		mm ft/in			
12 000 mm 40'0"	kg lb													*1300 *2,850	*1300 *2,850	14 030 45'6"	
10 500 mm 35'0"	kg lb													*1250 *2,750	*1250 *2,750	15 010 48'10"	
9000 mm 30'0"	kg lb													*1250 *2,700	*1250 *2,700	15 780 51'6"	
7500 mm 25'0"	kg lb													*1250 *2,700	*1250 *2,700	16 370 53'6"	
6000 mm 20'0"	kg lb													*1250 *2,700	*1250 *2,700	16 810 55'0"	
4500 mm 15'0"	kg lb													*1250 *2,750	*1250 *2,750	17 110 56'1"	
3000 mm 10'0"	kg lb			*4000	*4000								*4100 *8,900	*4100 *8,900	*1300 *2,850	*1300 *2,850	17 270 56'7"
1500 mm 5'0"	kg lb			*1500 *3,450	*1500 *3,450	*5100 *12,000	*5100 *12,000	*7300 *15,750	*7300 *15,750	*5650 *12,250	*5650 *12,250	*4700 *10,150	*4700 *10,150	*1350 *2,950	*1350 *2,950	17 300 56'8"	
0 mm 0'0"	kg lb			*1650 *3,700	*1650 *3,700	*3550 *8,150	*3550 *8,150	*8200 *18,300	7600 16,350	*6450 *13,950	5700 12,300	*5250 *11,400	4500 9,700	*1450 *3,150	*1450 *3,150	17 190 56'4"	
-1500 mm -5'0"	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3500 *7,900	*3500 *7,900	*6450 *14,800	*6450 *14,800	*7100 *15,350	5350 11,500	*5750 *12,400	4250 9,100	*1550 *3,350	*1550 *3,350	16 960 55'7"	
-3000 mm -10'0"	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6200 *14,100	*6200 *14,100	*7550 *16,350	5100 11,000	*6100 *13,250	4050 8,700	*1650 *3,650	*1650 *3,650	16 580 54'3"	
-4500 mm -15'0"	kg lb	*2800 *6,250	*2800 *6,250	*3350 *7,450	*3350 *7,450	*4400 *9,950	*4400 *9,950	*6550 *14,850	*6550 *14,450	7800 16,800	4950 10,700	6050 13,050	3900 8,450	*1850 *4,050	1800 3,950	16 050 52'6"	
-6000 mm -20'0"	kg lb	*3450 *7,650	*3450 *7,650	*4000 *9,000	*4000 *9,000	*5150 *11,550	*5150 *11,550	*7200 *16,400	6700 14,400	7750 16,650	4950 10,600	6000 12,900	3850 8,300	*2050 *4,600	1900 4,250	15 360 50'2"	
-7500 mm -25'0"	kg lb	*4100 *9,200	*4100 *9,200	*4800 *10,700	*4800 *10,700	*6000 *13,500	*6000 *13,500	*8200 *18,700	6750 14,600	7800 16,750	4950 10,650	6000 12,950	3850 8,350	*2400 *5,400	2100 4,650	14 470 47'2"	
-9000 mm -30'0"	kg lb	*4850 *10,850	*4850 *10,850	*5650 *12,650	*5650 *12,650	*7000 *15,900	*7000 *15,900	*9500 *20,450	6900 14,900	*7600 *16,400	5050 10,850	6100 13,100	3950 8,500	*2950 *6,650	2400 5,300	13 360 43'5"	
-10 500 mm -35'0"	kg lb	*5650 *12,650	*5650 *12,650	*6600 *14,950	*6600 *14,950	*8300 *18,900	*8300 *18,900	*8750 *18,800	7150 15,400	*7100 *15,150	5200 11,250	*5850 *12,550	4050 8,800	*3900 *8,950	2850 6,400	11 960 38'7"	
-12 000 mm -40'0"	kg lb			*7800 *17,600	*7800 *17,600	*9700 *20,550	*9700 *20,550	*7600 *16,100	7450 *16,100	*6200 *13,050	5450 11,800	*5050 *10,550	4300 9,300	*4300 *9,450	3700 8,500	10 140 32'4"	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

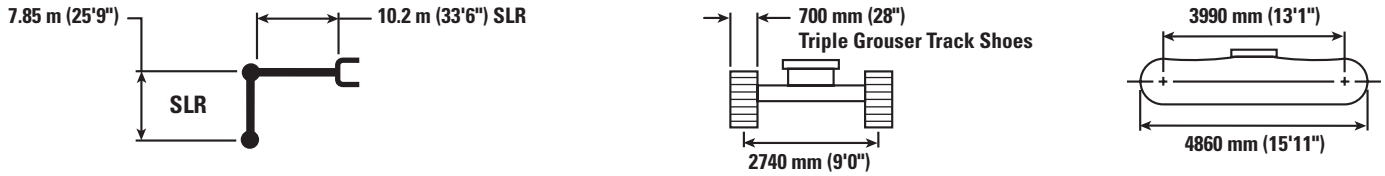
Lift capacity stays with ±5% for all available track shoes.















Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

333 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket (continued)



		10 500 mm (35'0")		12 000 mm (40'0")		13 500 mm (45'0")		15 000 mm (50'0")		16 500 mm (55'0")				mm ft/in
														
12 000 mm 40'0"	kg lb					*3,300	*3,300					*1300	*1300	14 030 45'6"
10 500 mm 35'0"	kg lb							*1250	*1250			*1250	*1250	15 010 48'10"
9000 mm 30'0"	kg lb							*2050	*2050			*1250	*1250	15 780 51'6"
7500 mm 25'0"	kg lb					*2600	*2600	*2550	2550			*1250	*1250	16 370 53'6"
6000 mm 20'0"	kg lb					*2750	*2750	*2700	2450	*1650	*1650	*1250	*1250	16 810 55'0"
4500 mm 15'0"	kg lb			*3050	*3050	*2950	2900	*2850	2400	*2100	2000	*1250	*1250	17 110 56'1"
3000 mm 10'0"	kg lb	*3650	*3650	*3350	3350	*3150	2750	*3000	2300	*2350	1900	*1300	*1300	17 270 56'7"
1500 mm 5'0"	kg lb	*4100	3900	*3650	3200	*3350	2650	*3150	2200	*2550	1850	*1350	*1350	17 300 56'8"
0 mm 0'0"	kg lb	*4500	3650	*3950	3000	*3600	2500	*3200	2150	*2550	1800	*1450	*1450	17 190 56'4"
-1500 mm -5'0"	kg lb	*4850	3450	*4250	2850	3650	2400	3150	2050	*2350	1750	*1550	*1550	16 960 55'7"
-3000 mm -10'0"	kg lb	5050	3300	4200	2750	3550	2350	3100	2000	*1800	1750	*1650	*1650	16 580 54'3"
-4500 mm -15'0"	kg lb	4950	3200	4100	2700	3500	2300	3050	1950			*1850	1800	16 050 52'6"
-6000 mm -20'0"	kg lb	4850	3150	4100	2650	3500	2250	*3000	2000			*2050	1900	15 360 50'2"
-7500 mm -25'0"	kg lb	4850	3150	4100	2650	3500	2300					*2400	2100	14 470 47'2"
-9000 mm -30'0"	kg lb	4950	3200	4150	2700							*2950	2400	13 360 43'5"
-10 500 mm -35'0"	kg lb	*4900	3350									*3900	2850	11 960 38'7"
-12 000 mm -40'0"	kg lb											*4300	3700	10 140 32'4"



ISO 10567



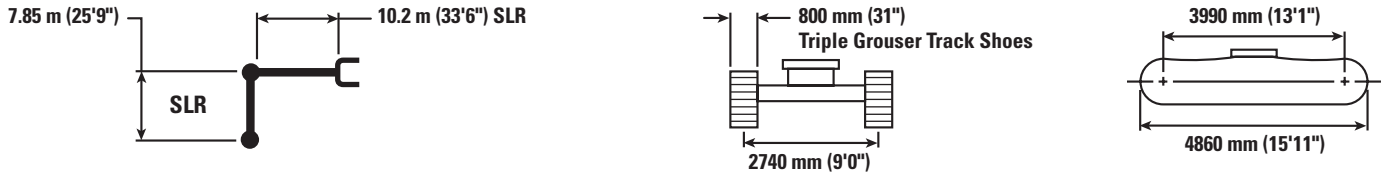
*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket



		1500 mm (5'0")		3000 mm (10'0")		4500 mm (15'0")		6000 mm (20'0")		7500 mm (25'0")		9000 mm (30'0")		mm ft/in			
12 000 mm 40'0"	kg lb													*1300 *2,850	*1300 *2,850	14 030 45'6"	
10 500 mm 35'0"	kg lb													*1250 *2,750	*1250 *2,750	15 010 48'10"	
9000 mm 30'0"	kg lb													*1250 *2,700	*1250 *2,700	15 780 51'6"	
7500 mm 25'0"	kg lb													*1250 *2,700	*1250 *2,700	16 370 53'6"	
6000 mm 20'0"	kg lb													*1250 *2,700	*1250 *2,700	16 810 55'0"	
4500 mm 15'0"	kg lb													*1250 *2,750	*1250 *2,750	17 110 56'1"	
3000 mm 10'0"	kg lb			*4000	*4000								*4100 *8,900	*4100 *8,900	*1300 *2,850	*1300 *2,850	17 270 56'7"
1500 mm 5'0"	kg lb			*1500 *3,450	*1500 *3,450	*5100 *12,000	*5100 *12,000	*7300 *15,750	*7300 *15,750	*5650 *12,250	*5650 *12,250	*4700 *10,150	*4700 *10,150	*1350 *2,950	*1350 *2,950	17 300 56'8"	
0 mm 0'0"	kg lb			*1650 *3,700	*1650 *3,700	*3550 *8,150	*3550 *8,150	*8200 *18,300	7750 16,700	*6450 *13,950	5800 12,550	*5250 *11,400	4600 9,900	*1450 *3,150	*1450 *3,150	17 190 56'4"	
-1500 mm -5'0"	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3500 *7,900	*3500 *7,900	*6450 *14,800	*6450 *14,800	*7100 *15,350	5450 11,750	*5750 *12,400	4300 9,300	*1550 *3,350	*1550 *3,350	16 960 55'7"	
-3000 mm -10'0"	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6200 *14,100	*6200 *14,100	*7550 *16,350	5200 11,250	*6100 *13,250	4150 8,900	*1650 *3,650	*1650 *3,650	16 580 54'3"	
-4500 mm -15'0"	kg lb	*2800 *6,250	*2800 *6,250	*3350 *7,450	*3350 *7,450	*4400 *9,950	*4400 *9,950	*6550 *14,850	*6550 *14,750	*7800 *16,950	5100 10,950	6200 13,350	4000 8,650	*1850 *4,050	*1850 *4,050	16 050 52'6"	
-6000 mm -20'0"	kg lb	*3450 *7,650	*3450 *7,650	*4000 *9,000	*4000 *9,000	*5150 *11,550	*5150 *11,550	*7200 *16,400	6850 14,750	7900 17,050	5050 10,850	6150 13,200	3950 8,500	*2050 *4,600	1950 4,350	15 360 50'2"	
-7500 mm -25'0"	kg lb	*4100 *9,200	*4100 *9,200	*4800 *10,700	*4800 *10,700	*6000 *13,500	*6000 *13,500	*8200 *18,700	6900 14,900	*7850 *17,000	5050 10,900	6150 13,250	3950 8,550	*2400 *5,400	2150 4,750	14 470 47'2"	
-9000 mm -30'0"	kg lb	*4850 *10,850	*4850 *10,850	*5650 *12,650	*5650 *12,650	*7000 *15,900	*7000 *15,900	*9500 *20,450	7050 15,250	*7600 *16,400	5150 11,100	6200 13,400	4000 8,700	*2950 *6,650	2450 5,450	13 360 43'5"	
-10 500 mm -35'0"	kg lb	*5650 *12,650	*5650 *12,650	*6600 *14,950	*6600 *14,950	*8300 *18,900	*8300 *18,900	*8750 *18,800	7300 15,750	*7100 *15,150	5300 11,500	*5850 *12,550	4150 9,000	*3900 *8,950	2900 6,550	11 960 38'7"	
-12 000 mm -40'0"	kg lb			*7800 *17,600	*7800 *17,600	*9700 *20,550	*9700 *20,550	*7600 *16,100	*7600 *16,100	*6200 *13,050	5550 12,050	*5050 *10,550	4350 9,500	*4300 *9,450	3800 8,650	10 140 32'4"	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

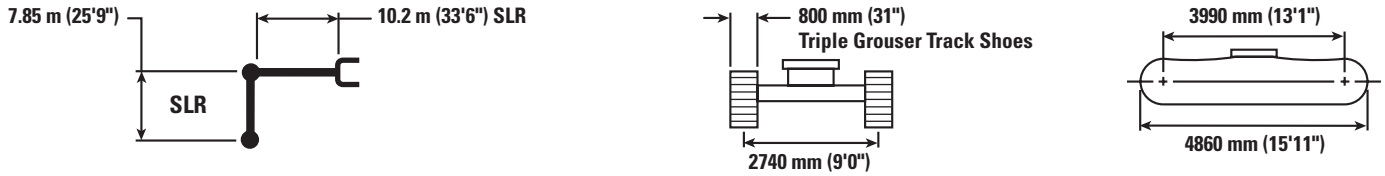
Lift capacity stays with ±5% for all available track shoes.















Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

333 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 7700 kg (16,980 lb) – with Bucket Linkages, without Bucket (continued)



		10 500 mm (35'0")		12 000 mm (40'0")		13 500 mm (45'0")		15 000 mm (50'0")		16 500 mm (55'0")				mm ft/in
														
12 000 mm 40'0"	kg lb					*3,300	*3,300					*1300 *2,850	*1300 *2,850	14 030 45'6"
10 500 mm 35'0"	kg lb							*1250	*1250			*1250 *2,750	*1250 *2,750	15 010 48'10"
9000 mm 30'0"	kg lb							*2050 *3,900	*2050 *3,900			*1250 *2,700	*1250 *2,700	15 780 51'6"
7500 mm 25'0"	kg lb					*2600 *5,700	*2600 *5,700	*2550 *5,150	*2550 *5,150			*1250 *2,700	*1250 *2,700	16 370 53'6"
6000 mm 20'0"	kg lb					*2750 *6,000	*2750 *6,000	*2700 *5,950	2500 5,350	*1650 *2,800	*1650 *2,800	*1250 *2,700	*1250 *2,700	16 810 55'0"
4500 mm 15'0"	kg lb			*3050 *6,650	*3050 *6,650	*2950 *6,400	*2950 *6,300	*2850 *6,200	2450 5,200	*2100 *3,800	2000 *3,800	*1250 *2,750	*1250 *2,750	17 110 56'1"
3000 mm 10'0"	kg lb	*3650 *7,950	*3650 *7,950	*3350 *7,300	*3350 *7,300	*3150 *6,850	2850 6,050	*3000 *6,550	2350 5,000	*2350 *4,450	1950 4,200	*1300 *2,850	*1300 *2,850	17 270 56'7"
1500 mm 5'0"	kg lb	*4100 *8,850	3950 8,500	*3650 *7,950	3250 6,950	*3350 *7,350	2700 5,800	*3150 *6,850	2250 4,850	*2550 *4,800	1900 4,050	*1350 *2,950	*1350 *2,950	17 300 56'8"
0 mm 0'0"	kg lb	*4500 *9,750	3750 8,000	*3950 *8,600	3100 6,600	*3600 *7,800	2600 5,500	3300 7,050	2200 4,650	*2550 *4,750	1850 3,950	*1450 *3,150	*1450 *3,150	17 190 56'4"
-1500 mm -5'0"	kg lb	*4850 *10,500	3550 7,600	*4250 *9,200	2950 6,300	3750 8,000	2500 5,300	3200 6,900	2100 4,500	*2350 *4,150	1800 3,850	*1550 *3,350	*1550 *3,350	16 960 55'7"
-3000 mm -10'0"	kg lb	5150 11,050	3400 7,250	4300 9,200	2850 6,050	3650 7,850	2400 5,150	3150 6,750	2050 4,400	*1800	1800	*1650 *3,650	*1650 *3,650	16 580 54'3"
-4500 mm -15'0"	kg lb	5050 10,850	3300 7,050	4200 9,050	2750 5,900	3600 7,750	2350 5,000	3100 6,700	2000 4,350			*1850 *4,050	*1850 *4,050	16 050 52'6"
-6000 mm -20'0"	kg lb	5000 10,750	3250 6,950	4150 9,000	2700 5,800	3550 7,700	2300 5,000	*3000 *4,950	2050 4,350			*2050 *4,600	1950 4,350	15 360 50'2"
-7500 mm -25'0"	kg lb	5000 10,750	3250 6,950	4200 9,000	2700 5,850	3600 7,750	2350 5,050					*2400 *5,400	2150 4,750	14 470 47'2"
-9000 mm -30'0"	kg lb	5050 10,850	3300 7,100	4250 9,150	2800 6,000							*2950 *6,650	2450 5,450	13 360 43'5"
-10 500 mm -35'0"	kg lb	*4900 *10,450	3400 7,350									*3900 *8,950	2900 6,550	11 960 38'7"
-12 000 mm -40'0"	kg lb											*4300 *9,450	3800 8,650	10 140 32'4"



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

333 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Africa, Middle East, Eurasia

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		Mass Boom	SLR Boom
		mm	in	m ³	yd ³	kg	lb		%	HD R2.8 (9'2")		
Pin-On (No Quick Coupler)												
Heavy Duty	DB	1500	60	1.88	2.46	1556	3,430	100	●	⊙		
	DB	1650	66	2.12	2.77	1691	3,729	100			⊙	
	DB	1800	72	2.36	3.08	1788	3,911	100			⊙	
Severe Duty	DB	1500	60	1.91	2.50	1678	3,696	90	●	⊙		
	DB	1650	66	2.15	2.81	1816	4,004	90			●	
	DB	1800	71	2.30	3.01	1914	4,220	90			⊙	
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100				⊙
Maximum load with pin-on (payload + bucket)								kg	5342	5055	6031	1435
								lb	11,777	11,144	13,296	3,164
With Pin Grabber Quick Coupler												
Heavy Duty	DB	1500	60	1.88	2.46	1556	3,430	100	⊙	⊖		
	DB	1650	66	2.12	2.77	1691	3,729	100			⊙	
	DB	1800	72	2.36	3.08	1788	3,911	100			⊖	
	DB	1500	60	1.91	2.50	1678	3,696	90	⊙	⊖		
Severe Duty	DB	1650	66	2.15	2.81	1816	4,004	90			⊙	
	DB	1800	71	2.30	3.01	1914	4,220	90			⊙	
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100				⊙
Maximum load with coupler (payload + bucket)								kg	4816	4529	5505	909
								lb	10,617	9,984	12,136	2,003

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

333 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Indonesia

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		Mass Boom	SLR Boom
		mm	in	m ³	yd ³	kg	lb		%	HD R2.8 (9'2")		
Pin-On (No Quick Coupler)												
Heavy Duty	DB	1500	61	1.88	2.46	1633	3,601	100	⊙	⊙		
	DB	1500	61	1.88	2.46	1588	3,601	100	●	⊙		
	DB	1800	73	2.36	3.08	1844	3926	100			⊙	
	DB	1750	69	2.60	3.40	1932	4255	100			⊖	
	DB	1600	63	2.00	2.62	1532	3,377	100	⊙	⊙	●	
Ditch Cleaning	A	1200	48	0.57	0.74	388	855	100				⊙
Maximum load with pin-on (payload + bucket)								kg	5342	5055	6031	1435
								lb	11,777	11,144	13,296	3,164
With Pin Grabber Quick Coupler												
Heavy Duty	DB	1500	61	1.88	2.46	1633	3,601	100	⊖	⊖		
	DB	1500	61	1.88	2.46	1588	3,601	100	⊙	⊖		
	DB	1800	73	2.36	3.08	1844	3926	100			⊙	
	DB	1750	69	2.60	3.40	1932	4255	100			⊖	
	DB	1600	63	2.00	2.62	1532	3,377	100	⊙	⊙	●	
Ditch Cleaning	A	1200	48	0.57	0.74	388	855	100				◇
Maximum load with coupler (payload + bucket)								kg	4816	4529	5505	909
								lb	10,617	9,984	12,136	2,003

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

333 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – South America

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		Mass Boom	SLR Boom
		mm	in	m ³	yd ³	kg	lb		%	HD R2.8 (9'2")		
Pin-On (No Quick Coupler)												
Heavy Duty	DB	1800	72	2.36	3.08	1788	3,911	100			⊙	
	DB	1600	63	2.00	2.62	1532	3,377	100	⊙	⊙	●	
Severe Duty	DB	1500	60	1.91	2.50	1678	3,696	90	●	⊙		
	DB	1650	65	2.30	3.01	1893	4,174	90			⊙	
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100				⊙
Maximum load with pin-on (payload + bucket)								kg	5342	5055	6031	1435
								lb	11,777	11,144	13,296	3,164
With Pin Grabber Quick Coupler												
Heavy Duty	DB	1800	72	2.36	3.08	1788	3,911	100			⊙	
	DB	1600	63	2.00	2.62	1532	3,377	100			⊙	
Severe Duty	DB	1500	60	1.91	2.50	1678	3,696	90	⊙	⊖		
	DB	1650	65	2.30	3.01	1893	4,174	90			⊙	
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100				◇
Maximum load with coupler (payload + bucket)								kg	4816	4529	5505	909
								lb	10,617	9,984	12,136	2,003

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.
Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

333 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Southeast Asia

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		Mass Boom	SLR Boom
		mm	in	m ³	yd ³	kg	lb		%	HD R2.8 (9'2")		
Pin-On (No Quick Coupler)												
Heavy Duty	DB	1500	61	1.88	2.46	1633	3,601	100	⊙	⊙		
	DB	1500	61	1.88	2.46	1588	3,601	100	●	⊙		
	DB	1800	73	2.36	3.08	1844	3,926	100			⊙	
	DB	1750	69	2.60	3.40	1932	4,255	100			⊖	
	DB	1600	63	2.00	2.62	1532	3,377	100	⊙	⊙	●	
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100				⊙
Maximum load with pin-on (payload + bucket)								kg	5342	5055	6031	1435
								lb	11,777	11,144	13,296	3,164
With Pin Grabber Quick Coupler												
Heavy Duty	DB	1500	61	1.88	2.46	1633	3,601	100	⊖	⊖		
	DB	1500	61	1.88	2.46	1588	3,601	100	⊙	⊖		
	DB	1800	73	2.36	3.08	1844	3,926	100			⊙	
	DB	1750	69	2.60	3.40	1932	4,255	100			⊖	
	DB	1600	63	2.00	2.62	1532	3,377	100	⊙	⊙	●	
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100				◇
Maximum load with coupler (payload + bucket)								kg	4816	4529	5505	909
								lb	10,617	9,984	12,136	2,003

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

333 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Pacific Islands

	Linkage	Width		Capacity		Weight		Fill	HD Reach Boom		SLR Boom
		mm	in	m ³	yd ³	kg	lb		%	HD R2.8 (9'2")	HD R3.2 (10'6")
Pin-On (No Quick Coupler)											
Heavy Duty	DB	1550	61	1.88	2.46	1621	3,574	100	⊙	⊙	
Severe Duty	DB	1550	56	1.90	2.49	1877	4,138	90	●	⊙	
	DB	1600	63	2.00	2.62	1532	3,377	100	⊙	⊙	●
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100			⊙
Maximum load with pin-on (payload + bucket)								kg	5342	5055	1435
								lb	11,777	11,144	3,164
With Pin Grabber Quick Coupler											
Heavy Duty	DB	1550	61	1.88	2.46	1621	3,574	100	⊖	⊖	
Severe Duty	DB	1550	56	1.90	2.49	1877	4,138	90	⊙	⊖	
Ditch Cleaning	312, A	1200	48	0.57	0.74	388	855	100			◇
Maximum load with coupler (payload + bucket)								kg	4816	4529	909
								lb	10,617	9,984	2,003

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

No Match

PIN-ON ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
Multi-Processors	H180 S			✓
	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top	✓	✓	✓
MP332 Universal Jaw-Flat Top	✓	✓	✓	
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035-Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

No Match

1800 kg/m³ (3,000 lb/yd³)

1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS (continued)

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Orange Peel Grapples	GSH440-950	●	●	●
	GSH440-1150	●	●	●
	GSH440-1550	●	○	●
	GSH455-1000	●	●	●
	GSH455-1500	○	○	●
	GSH455-2000	○		○
	GSH555-1000	●	○	●
	GSH555-1500	○		●
	GSM-50-1000	●	○	●
	GSM-50-1250	○	○	●
	GSM-50-1500			●
	GSM-50-2000			○
	Clamshell Grapples	CTV20-1300	●	●
CTV20-1500		●	●	●
CTV20-1700		●	○	●
CTV20-1900		○	○	●
CTV20-2300		○	○	○
CTV20-2700				○
CTV30-1700		○	○	●
CTV30-1900		○	○	●
CTV30-2300				○
CTV30-2700				○

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓*		✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓*	✓
	MP332 Demolition Jaw-Flat Top	✓*	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓*		✓
	MP332 Shear Jaw-Flat Top	✓	✓*	✓
MP332 Tank Shear Jaw-Flat Top			✓	
MP332 Universal Jaw-Flat Top	✓*		✓	
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓*	✓
Mobile Scrap and Demolition Shears	S3035-Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓*	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-45s DEDICATED COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓*	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓*	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top	✓*		✓
MP332 Universal Jaw-Flat Top	✓	✓*	✓	
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035-Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-45 DEDICATED COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
Multi-Processors	H180 S			✓
	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓*	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓*	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top			✓
MP332 Universal Jaw-Flat Top	✓	✓*	✓	
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035-Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

BOOM-MOUNT ATTACHMENTS

Boom Type		HD Reach Boom	Mass Boom
Mobile Scrap and Demolition Shears	S2070 Boom-Mount	✓	✓
	S2090 Boom-Mount	✓	✓
	S3070 Boom-Mount-Flat Top	✓*	✓

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Eurasia

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

No Match

PIN-ON ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
Multi-Processors	H180 S			✓
	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top	✓	✓	✓
	MP332 Universal Jaw-Flat Top	✓	✓	✓
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035 Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Eurasia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

No Match

1800 kg/m³ (3,000 lb/yd³)

1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS (continued)

Boom Type		HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Orange Peel Grapples	GSH440-950	●	●	●
	GSH440-1150	●	●	●
	GSH440-1550	●	○	●
	GSH455-1000	●	●	●
	GSH455-1500	○	○	●
	GSH455-2000	○		○
	GSH555-1000	●	○	●
	GSH555-1500	○		●
	GSM-50-1000	●	○	●
	GSM-50-1250	○	○	●
	GSM-50-1500			●
	GSM-50-2000			○
	Clamshell Grapples	CTV20-1300	●	●
CTV20-1500		●	●	●
CTV20-1700		●	○	●
CTV20-1900		○	○	●
CTV20-2300		○	○	○
CTV20-2700				○
CTV30-1700		○	○	●
CTV30-1900		○	○	●
CTV30-2300				○
CTV30-2700				○

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Eurasia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓*		✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓*	✓
	MP332 Demolition Jaw-Flat Top	✓*	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓*		✓
	MP332 Shear Jaw-Flat Top	✓	✓*	✓
MP332 Tank Shear Jaw-Flat Top			✓	
MP332 Universal Jaw-Flat Top	✓*		✓	
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓*	✓
Mobile Scrap and Demolition Shears	S3035 Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓*	✓*	✓
Compactors (Vibratory Plate)	CVPI10	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Eurasia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-45s DEDICATED COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓*	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓*	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top	✓*		✓
MP332 Universal Jaw-Flat Top	✓	✓*	✓	
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035 Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Eurasia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-45 DEDICATED COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓*	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓*	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
MP332 Tank Shear Jaw-Flat Top			✓	
MP332 Universal Jaw-Flat Top	✓	✓*	✓	
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035 Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Eurasia *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

BOOM-MOUNT ATTACHMENTS

Boom Type		HD Reach Boom	Mass Boom
Mobile Scrap and Demolition Shears	S2070	✓	✓
	S2090	✓	✓
	S3070 Flat Top	✓*	✓

333 Hydraulic Excavator Specifications

Attachments Offering Guide – South America

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

PIN-ON ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC-Side Mount	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top	✓	✓	✓
	MP332 Universal Jaw-Flat Top	✓	✓	✓
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035-Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓
Mulchers	HM5515	✓	✓	✓

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – South America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

No Match

1800 kg/m³ (3,000 lb/yd³)

1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS *(continued)*

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Rotary Cutters	RC30	✓	✓	✓
Orange Peel Grapples	GSH440-950	●	●	●
	GSH440-1150	●	●	●
	GSH440-1550	●	○	○
	GSH455-1000	●	●	●
	GSH455-1500	○	○	●
	GSH455-2000	○		○
	GSH555-1000	○	●	●
	GSH555-1500		○	●

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – South America (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC-Side Mount	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓*		✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓*	✓
	MP332 Demolition Jaw-Flat Top	✓*	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓*		✓
	MP332 Shear Jaw-Flat Top	✓	✓*	✓
	MP332 Tank Shear Jaw-Flat Top			✓
	MP332 Universal Jaw-Flat Top	✓*		✓
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓*	✓	✓
Mobile Scrap and Demolition Shears	S3035-Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓*	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓
Mulchers	HM5515	✓	✓	✓
Rotary Cutters	RC30	✓	✓	

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – South America (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-45 DEDICATED COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw	✓	✓	✓
	MP332 Demolition Jaw	✓	✓	✓
	MP332 Pulverizer Jaw	✓	✓	✓
	MP332 Shear Jaw	✓	✓	✓
	MP332 Tank Shear Jaw	✓	✓*	✓
	MP332 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓	✓*	✓
	MP332 Pulverizer Jaw-Flat Top	✓	✓*	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
MP332 Tank Shear Jaw-Flat Top			✓	
	MP332 Universal Jaw-Flat Top	✓	✓*	✓
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035-Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓	✓*	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓
Rotary Cutters	RC30	✓	✓	

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – South America (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

S80 DEDICATED COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP332 Demolition Jaw-Flat Top	✓*	✓	✓
	MP332 Pulverizer Jaw-Flat Top	✓*	✓	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top		✓*	✓
	MP332 Universal Jaw-Flat Top	✓*	✓	✓
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3035 Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓*	✓	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓*	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓
Rotary Cutters	RC30	✓	✓	

(continued on next page)

333 Hydraulic Excavator Specifications

Attachments Offering Guide – South America (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

HCS80 DEDICATED COUPLER ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 S			✓
Multi-Processors	MP324 Concrete Cutter Jaw	✓	✓	✓
	MP324 Demolition Jaw	✓	✓	✓
	MP324 Pulverizer Jaw	✓	✓	✓
	MP324 Shear Jaw	✓	✓	✓
	MP324 Tank Shear Jaw	✓	✓	✓
	MP324 Universal Jaw	✓	✓	✓
	MP332 Concrete Cutter Jaw-Flat Top	✓*	✓	✓
	MP332 Demolition Jaw-Flat Top	✓*	✓	✓
	MP332 Pulverizer Jaw-Flat Top	✓*	✓	✓
	MP332 Shear Jaw-Flat Top	✓	✓	✓
	MP332 Tank Shear Jaw-Flat Top			✓
	MP332 Universal Jaw-Flat Top	✓*	✓	✓
Demolition and Sorting Grapples	G332	✓	✓	✓
	G345	✓*	✓	✓
Mobile Scrap and Demolition Shears	S3035 Flat Top	✓	✓	✓
Pulverizers	P224 Secondary Pulverizer	✓	✓	✓
	P232 Secondary Pulverizer	✓*	✓	✓
	P324 Primary Pulverizer	✓	✓	✓
	P332 Primary Pulverizer-Flat Top	✓*	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓
Rotary Cutters	RC30	✓	✓	

BOOM-MOUNT ATTACHMENTS

Boom Type		HD Reach Boom	Mass Boom
Mobile Scrap and Demolition Shears	S2070 Boom-Mount	✓	✓
	S2090 Boom-Mount	✓	✓
	S3070 Boom-Mount-Flat Top	✓*	✓

333 Hydraulic Excavator Specifications

Attachments Offering Guide – Southeast Asia, Indonesia

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

No Match

CAT PIN-ON ATTACHMENTS

Boom Type	Stick Length	HD Reach Boom		Mass Boom
		HD R2.8 m (9'2")	HD R3.2 m (10'6")	M2.5 m (8'2")
Hydraulic Hammers	H130 GC	✓	✓	✓
	H130 GC S	✓	✓	✓
	H130 S	✓	✓	✓
	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC S			✓
	H180 S			✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓
Rotary Cutters	RC30	✓	✓	

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			CAT TECHNOLOGY		
6.15 m (20'2") HD Reach boom		✓	VisionLink®	✓*	
5.55 m (18'2") Mass boom		✓ ⁽¹⁾	VisionLink Productivity		✓
10.2 m (33'6") Super Long Reach boom		✓	Remote Flash	✓	
2.8 m (9'2") HD Reach stick		✓ ⁽²⁾	ELECTRICAL SYSTEM		
3.2 m (10'6") HD Reach stick		✓	Maintenance-free 1,000 CCA batteries	✓	
2.5 m (8'2") Mass stick (with rebar)		✓ ⁽¹⁾	Centralized electrical disconnect switch	✓	
7.85 m (25'9") Super Long Reach stick		✓	Programmable time-delay working lights	✓	
Bucket linkage, DB-type with lifting eye	✓ ⁽³⁾		LED chassis, boom and cab lights	✓	
Bucket linkage, DB-type without lifting eye		✓ ⁽⁴⁾	ENGINE		
Bucket linkage, A-type with lifting eye		✓ ⁽⁵⁾	Cat® C7.1 single turbo diesel engine	✓	
Bucket linkage, A-type without lifting eye		✓ ⁽⁶⁾	Two selectable modes: Power, Smart	✓	
CAB			4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓	
ROPS	✓		Electric cooling fans with auto-reverse function	✓	
High-resolution 203 mm (8") LCD touchscreen monitor	✓		Auto engine speed control	✓	
Auto bi-level air conditioner	✓		Auto engine idle shutdown	✓	
Keyless push-to-start engine control	✓		Electric fuel priming pump	✓	
Height-adjustable console, three steps with tool	✓		50° C (122° F) high-ambient cooling capacity	✓	
Fixed left-side console	✓		-18° C (0° F) cold start capability	✓	
Mechanical-suspension seat	✓		Double element air filter with integrated pre-cleaner	✓	
51 mm (2") seat belt	✓		2 × 115 Amp dual alternator	✓	
Bluetooth integrated radio® with USB/Auxiliary ports	✓		Two-stage fuel filtration system with water separator and indicator	✓	
24V DC outlets	✓		*Connect subscription only. Additional subscriptions are available. Contact your Cat dealer for availability.		
Document storage	✓		<i>(continued on next page)</i>		
Cup holder	✓				
Beverage holder	✓				
Openable two-piece front window	✓				
Rear window emergency exit	✓				
Upper radial wiper with washer	✓				
Openable steel hatch	✓				
LED dome light	✓				
Roller front sunscreen	✓				
Roller rear sunscreen		✓			
Washable floor mat	✓				
Beacon ready	✓				
Cat Stick Steer		✓			

⁽¹⁾All regions except Pacific Islands.

⁽²⁾All regions except South America.

⁽³⁾Not available for Eurasia or Gulf states.

⁽⁴⁾Standard Eurasia; mandatory for Gulf states; optional for Southeast Asia; not available in other regions.

⁽⁵⁾South America only.

⁽⁶⁾All regions except South America.

333 Standard and Optional Equipment

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
HYDRAULIC SYSTEM			SERVICE AND MAINTENANCE		
Electronic main control valve	✓		Side entry to service platform	✓	
Boom and stick regeneration circuit	✓		Grouped location of engine oil and fuel filters	✓	
Tandem type electronic main pump	✓		Scheduled Oil Sampling (S-O-S SM) ports	✓	
Auto warm up	✓		Ground-level 2nd dipstick for engine oil	✓	
Auto two-speed travel	✓		Integrated vehicle health management system	✓	
Boom and stick drift reduction valve	✓		UNDERCARRIAGE AND STRUCTURES		
Element type main hydraulic filter	✓		Long undercarriage	✓	
SAFETY AND SECURITY			600 mm (24") triple grouser track shoes		✓ ⁽⁶⁾
Auto hammer stop	✓		600 mm (24") double grouser shoes		✓ ⁽⁹⁾
Rearview camera	✓		700 mm (28") triple grouser track shoes		✓ ⁽¹⁰⁾
Right-hand-side mirror		✓	750 mm (30") triple grouser track shoes		✓ ⁽¹¹⁾
Right-hand-sideview camera		✓ ⁽⁷⁾	800 mm (31") triple grouser track shoes		✓
Lockable disconnect switch	✓		Three-piece segmented track guiding guards		✓
Ground-level engine shutoff switch	✓		Full-length segmented track guiding guards		✓
Right-hand handrail and hand hold	✓		Travel motor guards	✓	
Signaling/warning horn	✓		Bottom guards	✓	
Service platform with anti-skid plate and countersunk bolts	✓		Swivel guards		✓
Hydraulic lock out lever neutralizes all controls	✓		Grease lubricated track links	✓	
Travel alarm		✓ ⁽⁸⁾	7700 kg (16,980 lb) counterweight	✓	
Swing alarm		✓	Tie-down points (ISO 15818 compliant)	✓	

⁽⁶⁾All regions except South America.

⁽⁷⁾Mandatory for Kingdom of Saudi Arabia.

⁽⁸⁾Standard in South America and Pacific.

⁽⁹⁾Africa, Middle East and South America only.

⁽¹⁰⁾All regions except Africa, Middle East.

⁽¹¹⁾Africa, Middle East, Eurasia and Indonesia only.

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Radial lower wiper for 70/30 with washer
- RH electrical pedal (two-way) for tool control
- LH electrical pedal (two-way) for tool control
- Radial lower wiper for two piece (70/30) windshield, with washer
- Polycarbonate roof hatch
- P5A laminated glass front windshield and roof hatch (for EU demolition regulation)

GUARDS

- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Full protecting vandalism guard (not compatible with cab light cover, rain protector)

SERVICE AND MAINTENANCE

- Grease gun holder

SAFETY AND SECURITY

- Bluetooth receiver kit
- 75 mm (3") retractable seat belt

333 Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C7.1 engine emits equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
- Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels** up to:
 - ✓ 100% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**For use of blends higher than 20% biodiesel, consult your Cat dealer.*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.85 kg (1.9 lb) of refrigerant which has a CO₂ equivalent of 1.216 metric tonnes (1.340 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

Exterior Sound Power Level (ISO 6395:2008) – 103 dB(A)

Operator Sound Pressure Level (ISO 6396:2008) – 76 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Smart mode matches machine power to digging requirements automatically
 - Push-to-start engine with automatic engine speed control
 - Cut maintenance costs with extended service intervals
 - Reduce fuel consumption with the high-efficiency hydraulic fan that cools the engine on demand
 - The latest hydraulic oil filter provides longer life with a 3,000-hour replacement interval – 50% longer than previous filter designs
 - Remote Flash and Remote Troubleshoot

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2024 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

AEXQ3370-05 (04-2024)
Replaces AEXQ3370-04
Build Number: 07F
(Afr-ME, Eurasia, Indonesia,
S Am [except Brazil, Chile,
Colombia], SE Asia,
Pacific Islands)

