

C13D

Engine | 800-1,000 bhp (597-746 kW) | 2,206-2,780 lb-ft (2990-3770 Nm)



Get legendary Cat reliability and durability with high power density using the Cat® C13D Diesel Engines.

Based on decades of diesel engine innovation and expertise, these engines are designed for severe duty equipment and the most demanding environments and applications around the world.



More importantly, they are backed by the Cat® global dealer network ready to keep missions moving anywhere in the world.

Built to Power:

Tracked/Wheeled IFVs

MBTs

Heavy Utility Trucks

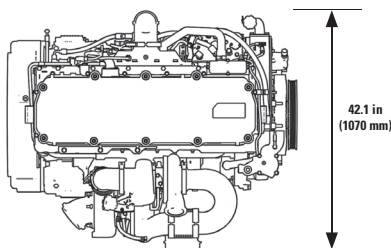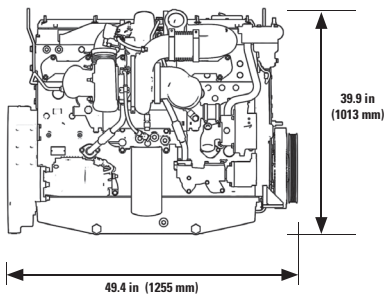


Cat® C13 shown above.

Specifications

Engine Configuration	In-line 6 Cylinder
Bore and Stroke (in/mm)	5.1 x 6.4 / 130 x 162
Displacement (in ³ /L)	787.2 / 12.9
Aspiration	Turbocharged and Aftercooled
Cycle	4 Stroke
Combustion System	Direct Injection
Compression Ratio	18:1
Rotation from Flywheel End	Counterclockwise
Oil Capacity (gal/L)	8 / 30
Cooling System	Liquid
Coolant Capacity (gal/L)	3.8 / 14.2
Dry Weight (lb/kg)	2,535-2,866 / 1150-1300



C13D Engine

800-1,000 bhp (597-746 kW) | 2,206-2,780 lb-ft (2990-3770 Nm)

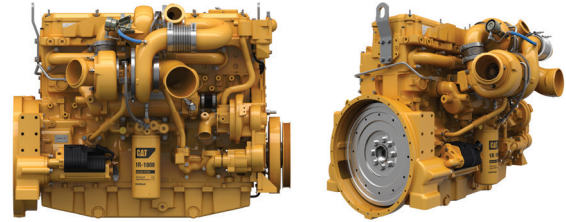

Cat® C13 shown above.

Superior torque for optimal performance. (based on SAE J1995)

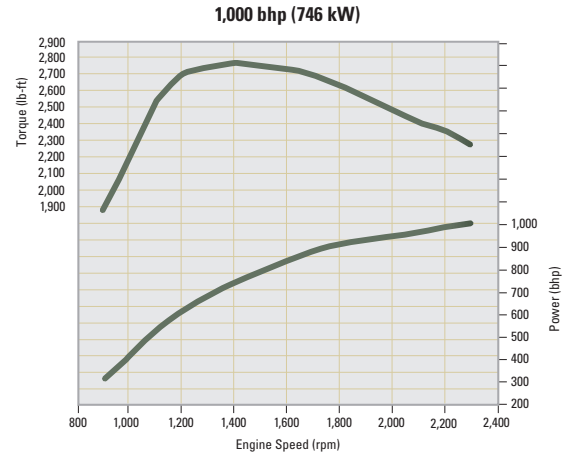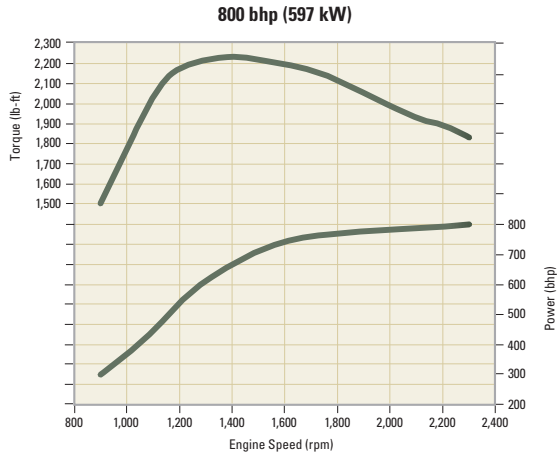

Brake Power (bhp)	Speed (rpm)	Torque (lb-ft)	Speed (rpm)	Emission Level
800	2,300	2,300	1,400	Low BSFC & Euro III*
1,000	2,300	2,780	1,400	Unregulated

Standard Equipment

Air Inlet and Exhaust System

- Single or series sequential turbochargers
- Exhaust manifold, dry

Control System

- Electronic governing, PTO speed control
- Automatic altitude compensation
- Power compensation for fuel temperature
- Programmable low and high idle and total engine limit
- Electronic diagnostics and fault logging
- SAE J1939 broadcast and control
- ADEM™ Electronic Control Unit (ECU)

Cooling System

- Thermostats and housing
- Jacket water pump, centrifugal
- Water pump, inlet

Flywheels and Flywheel Housing

- SAE No. 1 flywheel housing

Fuel System

- Fuel filter, secondary
- ACERT™ Technology
- Fuel transfer pump

Lube System

- Crankcase breather
- Oil cooler
- Oil filler
- Lube oil filter
- Oil pan
- Oil dipstick
- Gear driven oil pump

General

- Vibration damper
- Lifting eyes

*Emits equivalent to Euro III. Does not meet current EU emission standards.

Media number: PEHJ0850

© 2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

