

# **Cat**<sup>®</sup> 265

COMPACT TRACK LOADER

#### FEATURES:

The Cat® 265 Compact Track Loader, with its vertical lift design, delivers extended reach and lift height for quick and easy truck loading. Its standard torsion suspension undercarriage system provides superior traction, flotation, stability, and speed to work in a wide range of applications and underfoot conditions. The 265 features the following:

- Redesigned Operator Station delivers a larger operating environment, and combined with additional seat travel, the 265 provides more space for operators of any size. The optional one-piece, sealed, and pressurized cab offers a clean and quiet workspace with excellent air distribution through optimally placed vents throughout the cab.
- Available ventilated and heated high-back air ride seat with seatmounted adjustable joystick controls deliver industry-leading operator comfort.
- High-performance power train provides selectable settings for drive power priority and hystat drive response to customize the machine performance to match the task.
- Three levels of auxiliary hydraulic performance available Standard Flow, High Flow, and High Flow XPS. Standard flow for attachments that require a base level of auxiliary flow and horsepower, High Flow boosts the auxiliary flow for applications that demand additional hydraulic flow for increased attachment performance, and the High Flow XPS hydraulic system provides maximum auxiliary hydraulic performance by delivering additional flow and additional pressure for the most demanding attachments and applications.

- Electronically controlled Cat C2.8TA (turbo after-cooled) engine meets U.S. EPA Tier 4 Final and EU Stage V emission standards while delivering maximum horsepower across a wide RPM range and providing high torque for increased working performance, no matter the application.
- Standard torsion suspension undercarriage and standard two-speed travel, combined with the optional Speed Sensitive Ride Control system improves operation on rough terrain, enabling better load retention, increased productivity, and greater operator comfort.
- Maximize machine capability and control with the Advanced Joysticks and Advanced Touchscreen Monitor. The 20.3 cm (8-inch) Advanced Touchscreen Monitor offers cutting-edge functionality and control that includes an integrated radio, Bluetooth® connectivity, and multi-camera (side-view) option, and supports 32 different language choices. The Advanced Joysticks provide unmatched control of machine functions and adjustments within the display without operators having to remove their hands from the controls. This includes the on-joystick navigation of the Advanced Touchscreen Monitor, radio volume up/down/mute, creep activation, creep on/off, creep speed increment/decrement, one-button Smart Attachment control activation, and additional auxiliary control buttons that deliver single-button control of complex attachment functions.
- Ground-level access to all daily service and routine maintenance points help reduce machine downtime for greater productivity.
- Broad range of performance-matched Cat Attachments make the Cat Compact Track Loaders the most versatile machine on the job site.

# **Specifications**

## **Engine**

Engine Model	Model Cat® C2.8TA (turbo after-cooled)	
O D OAE 1100E	•	•
Gross Power SAE J1995	55.2 kW	74 hp
Net Power SAE 1349	54.9 kW	74 hp
Net Power ISO 9249	54.4 kW	73 hp
Peak Torque at 1,360 rpm SAE J1995	380 N·m	280 lbf-ft
Displacement	2.8 L	171 in³
Stroke	110 mm	4.3 in
Bore	90 mm	3.5 in

### Weights\*

Operating Weight 4759 kg	10,492 lb
--------------------------	-----------

\*Operating Weight, Operating Specifications, and Dimensions are based on 2036 mm (80") low profile bucket with bolt on cutting edge, 450 mm (17.7") wide track, 75 kg (165 lb) operator, open canopy, mechanical suspension seat, HD battery with disconnect, standard flow hydraulics, manual coupler, and full fluids. No external counterweights, and no dual self-level/return-to-dig/work tool positioner.


#### **Power Train**

Travel Speed (Forward or Reverse)		_
One Speed	8 km/h	5 mph
Two Speed	13 km/h	8.1 mph
Cab		
Rollover Protective Structure (ROPS)	ISO 3471:20	08
Falling Object Protective Structure (FOPS)	ISO 3449:20	05 Level I
	ISO 3449:200	5 Level II (optional)

## **Service Refill Capacities**

Cooling System	10.7 L	2.8 gal
Engine Crankcase	8 L	2.1 gal
Fuel Tank	120.7 L	31.9 gal
Hydraulic System	36.8 L	9.7 gal
Hydraulic Tank	26 L	6.9 gal



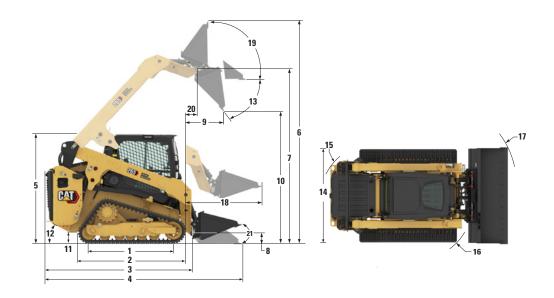

# Dimensions\*

1 Length of Track on Ground	1626 mm	64.0 in
2 Overall Length of Track	2126 mm	83.7 in
3 Length without Bucket	2950 mm	116.1 in
4 Length with Bucket on Ground	3580 mm	140.9 in
5 Height to Top of Cab	2115 mm	83.3 in
6 Maximum Overall Height	4173 mm	164.3 in
7 Bucket Pin Height at Maximum Lift	3354 mm	132.0 in
8 Bucket Pin Height at Carry Position	213 mm	8.4 in
9 Reach at Maximum Lift and Dump	638 mm	25.1 in
10 Clearance at Maximum Lift and Dump	2655 mm	104.5 in
11 Ground Clearance	216 mm	8.5 in

12 Departure Angle	28.2	
13 Maximum Dump Angle	46.4	0
14 Vehicle Width (450 mm/17.7 in tracks)	1925 mm	75.8 in
15 Turning Radius from Center – Machine Rear	1741 mm	68.5 in
16 Turning Radius from Center – Coupler	1436 mm	56.5 in
17 Turning Radius from Center – Bucket (racked)	2229 mm	87.8 in
18 Maximum Reach with Arms Parallel to Ground	1187 mm	46.7 in
19 Rack Back Angle at Maximum Height	85.3	0
20 Bucket Pin Reach at Maximum Lift	249 mm	9.8 in
21 Roll Back Angle (ground level)	27°	•

# Hydraulic System

Hydraulic Flow – Standard:		
Loader Hydraulic Pressure	24 130 kPa	3,500 psi
Loader Hydraulic Flow	86 L/min	23 gal/min
Hydraulic Power (calculated)	34.6 kW	46.4 hp
Hydraulic Flow – High Flow:		
Loader Hydraulic Pressure	24 130 kPa	3,500 psi
Loader Hydraulic Flow	113 L/min	30 gal/min
Hydraulic Power (calculated)	45.4 kW	60.9 hp
Hydraulic Flow – High Flow XPS:		
Loader Hydraulic Pressure	28 000 kPa	4,061 psi
Loader Hydraulic Flow	129 L/min	34 gal/min
Hydraulic Power (calculated)	60.2 kW	80.7 hp

# **Operating Specifications\***

Rated Operating Capacity:		
35% Tipping Load	1280 kg	2,823 lb
50% Tipping Load	1829 kg	4,033 lb
Rated Operating Capacity		
with Optional Counterweight (at 35%)	1342 kg	2,961 lb
Tipping Load	3659 kg	8,066 lb
Breakout Force, Tilt Cylinder	3937 kg	8,680 lb
Breakout Force, Lift Cylinder	3057 kg	6,739 lb
Ground Contact Area (450 mm/17.7 in track)	1.62 m <sup>2</sup>	2,512 in <sup>2</sup>
Ground Pressure (450 mm/17.7 in tracks)	28.8 kPa	4.2 psi
Enclosed Cab Adds:		
Operating Weight	+82 kg	+181 lb
Tip Load	+97 kg	+214 lb
Rated Operating Capacity (35%)	+34 kg	+75 lb
Counterweight Adds:		
Operating Weight	+125 kg	+276 lb
Tip Load	+224 kg	+494 lb
Rated Operating Capacity (35%)	+78 kg	+173 lb
· · · · ·	-	

# **265 Environmental Declaration**

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <a href="https://www.caterpillar.com/en/company/sustainability">https://www.caterpillar.com/en/company/sustainability</a>.

## **Engine**

- The Cat® C2.8TA (turbo, after-cooled) engine meets U.S. EPA Tier 4
  Final and EU Stage V emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
  - ✓ 20% biodiesel FAME (fatty acid methyl ester)
  - √ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

## **Air Conditioning System**

• The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a or R1234yf (Europe). See label or instruction manual for gas refrigerant identification. If machine is provided with R134a (Global Warming Potential = 1430), the system contains 0.85 kg (1.87 lbs) of refrigerant, which has a CO<sub>2</sub> equivalent of 1.216 metric tons (1.34 tons). If machine is provided with R1234yf (Global Warming Potential = 0.501), the system contains 0.85 kg (1.87 lbs) of refrigerant, which has a CO<sub>2</sub> equivalent of 0.00043 metric tons (0.00047 tons).

#### **Paint**

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
- Barium < 0.01%
- Cadmium < 0.01%
- Chromium < 0.01%
- Lead < 0.01%

#### **Sound Performance**

Inside Cab\* – 80 dB(A)

Outside Cab\*\* - 103 dB(A)

- Cab and ROPS are standard in North America and Europe.
   \*The declared dynamic operator sound pressure levels per ISO 6395:2008. The measurements were conducted with the cab doors and windows closed and at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.
- \*\*The labeled sound power level for the CE marked configurations when measured according to the test procedure and conditions specified in 2000/14/EC.

## **Oils and Fluids**

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

# **Features and Technology**

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
- Extended life coolant and long life hydraulic fluid extend maintenance intervals to reduce fluid consumption
- Boost productivity with Cat technologies like work tool positioner, return to dig and Cat Smart Attachments
- Save fuel with efficiency features such as foot throttle pedal and cooling system demand fan
- Remote machine monitoring through onboard Product Link telematics

## Recycling

 The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	66.31
Rubber	9.23
Iron	7.31
Other	3.95
Nonferrous Metal	3.76
Fluid	3.27
Plastic	2.18
Mixed Metal	1.72
Mixed-Metal and Nonmetal	1.18
Uncategorized	1.08
Mixed Nonmetallic	0.01
Total	100.00

A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714:2008 (Earth-moving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714:2008 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following values in the table may vary.

Recyclability - 95%

The data provided above was based on the product configuration as provided by the individual product group.

# **ATTACHMENTS**

Get more from your machine with Cat attachments. Choose from a wide variety of options and tailor your machine to different tasks and conditions.

Augers

Backhoes

Bale Grabs

**Bale Spears** 

Blades, Grader, Box, Angle and Dozer

Brooms, Angle, Pickup and Utility

Brushcutters

**Buckets** 

**Cold Planers** 

Compactors

Fork Tines and Carriages

Hammers

Material Handling Arm

Mulchers

**Nursery Forks** 

Rakes, Grapple, Landscape

and Power Box

Shears

**Snow Blowers** 

**Snow Plows** 

**Snow Pushes** 

**Snow Wings** 

Stump Grinders

Tillers


Trenchers

Wheel Saws

Smart Backhoe

Smart Dozer Blade with Assist

Smart Grader Blade with Assist

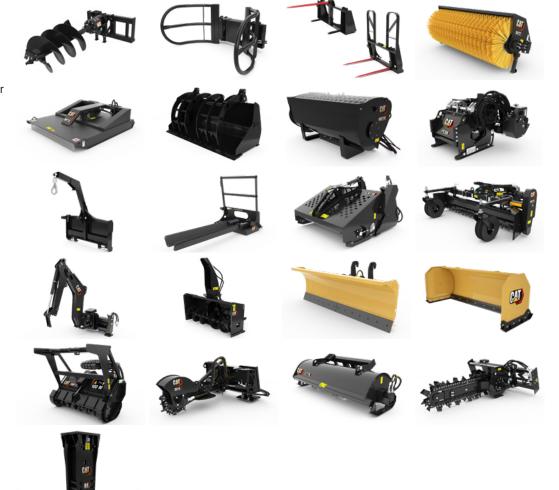

## **MANDATORY EQUIPMENT**

- Quick Coupler: Manual or Hydraulic
- High Visibility Seat Belt: 50 mm (2 in), 75 mm (3 in), or 3-point lap/shoulder
- Steel Imbed Rubber Track 450 mm (17.7 in) bar tread, 450 mm (17.7 in) block tread
- Dual Flange Front Idler/Single Flange Rear Idler or Triple Flange Front/Rear Idlers

#### **PERFORMANCE PACKAGES**

- Performance Package HP1: Standard Flow Hydraulics
- Performance Package HP3: High Flow XPS Hydraulics

#### **COMFORT PACKAGES**

- Open canopy: Cup Holder, Cell Phone Pocket, choice of vinyl Seat (Mechanical Suspension, High Back/Heated/Air Ride Seat)
- Enclosed Cab with heat and air conditioning: Side Windows, Cup Holder, Cell Phone Pocket, choice of Seat (Mechanical Suspension, High Back/Heated Air Ride Seat, High Back/Ventilated and Heated Air Ride Seat) and Door choice (Glass or Polycarbonate)

#### **TECHNOLOGY PACKAGES**

- T2 Standard Display, Standard Joysticks, traditional Key Start switch, and Rear-view camera.
- T4 Advanced Touchscreen Monitor, Advanced Joysticks, Push start, X-mount cell phone holder, and a Rear-view camera.
- T5 T4 + 2 additional side view cameras.

#### **RADIO**

- Radio, none for open canopy machines and countries not certified for Bluetooth® technology
- Integrated AM/FM radio with Bluetooth technology.

  Includes USB port, 3.5 mm (0.13 in) AUX input, and BT microphone.

  Only for use with enclosed cab. Availability varies by country.
- Integrated DAB+/AM/FM radio with Bluetooth technology.

  Includes USB port, 3.5 mm (0.13 in) AUX input, and BT microphone.

  Only for use with enclosed cab. Availability varies by country.

#### PRODUCT LINK™

- Product Link™ Basic series PL243
- Product Link Elite series PLE643

#### **COOLING FAN**

- On-demand, variable speed hydraulic cooling fan
- On-demand, variable speed hydraulic cooling fan, with automatic and manual purge reversing operation

#### **GUARDING AND SEALING PACKAGES**

- HD0 base guarding and sealing (engine air inlet rain cap, front cabto-frame sealing, and hydraulic fill access door)
- HD1- intermediate guarding and sealing† (HD0 + cab-to-frame side sealing, lockable fuel fill access door, tilt cylinder guarding, and drive line bottom guarding.)
- HD2 most comprehensive guarding and sealing† (HD1 + turbo guard, exhaust stack wrap, DPF wrap, quick disconnect guarding, fully enclosed drive line guarding, under step hydraulic lines guard cover, engine air inlet pre-cleaner.)

†Some equipment varies by region.

## **STANDARD EQUIPMENT**

#### **ELECTRICAL**

- Work Tool Electrical Harness
- Heavy duty battery
- Battery disconnect with lockout feature
- 12-volt Electrical System
- 85 Ampere Alternator
- LED Work Lights
- Auto Reverse Lights
- Switch Backlighting
- Interior LED Dome Light
- Backup Alarm
- Electrical Outlet, Beacon
- Exterior Courtesy Lighting

#### **OPERATOR ENVIRONMENT**

- Full color LCD monitor: Creep speed control, Drive response adjustment, Implement response adjustment, Drive Power Priority adjustment, Language selection (× 32), Multi-operator Anti-theft Security System and Monitoring, Maintenance schedule and reminders, Event and Diagnostic Code monitoring, Date /Time/Units/Brightness settings, and Smart Technology for use with Smart Attachments.
- Operator Warning System Indicators: Air Filter Restriction, Alternator Output, Armrest Raised/Operator Out of Seat, Engine Coolant Temperature, Engine Oil Pressure, Glow Plug Activation, Hydraulic Supply Filter Restriction, Hydraulic Oil Temperature, Park Brake Engaged, Engine Emission System (where applicable)
- Gauges: Fuel Level, Hour Meter, Hydraulic Temperature, Hour Meter, Battery Voltage, Tachometer
- Fold In Ergonomic Contoured Armrest
- Control Interlock System, when operator leaves seat or armrest raised: Hydraulic System Disables, Hydrostatic Transmission Disables, Parking Brake Engages
- ROPS Cab, Tilt Up
- FOPS, Level I
- Top and Rear Windows
- Floor Mat
- Headliner
- Interior Rearview Mirror
- Horn
- Hand (Dial) Throttle, Electronic
- Seat Mounted Joystick Controls
- Cell Phone Storage Pocket
- Cup Holder
- 12-volt power port
- Foot Throttle
- Rear-view Camera

#### **HYDRAULICS**

- Selectable control pattern ISO or H
- Electro/hydraulic implement control
- Electro/hydraulic hydrostatic transmission control
- Speed sensor guarding
- Heavy duty flat faced quick disconnects with integrated pressure release lever
- Hydraulic oil level sight gauge

#### **POWER TRAIN**

- Cat C2.8TA turbocharged, after-cooled diesel engine, meeting
   Tier 4 Final and Stage V Emission Standards:
  - · Glow plugs starting aid
  - Liquid cooled, direct injection
- Extended life antifreeze (-37° C, -34° F)
- Air cleaner, dual element, radial seal
- Scheduled Oil Sampling (S·O·S<sup>SM</sup>) Valve, Hydraulic Oil
- Ecology drain coolant
- Radiator coolant level sight gauge
- Radiator expansion bottle
- Filter, hydraulic supply, cartridge type
- Filter, hydraulic return, cartridge type
- Filter, canister type, engine oil
- Filter, canister type, fuel and water separator
- Radiator/hydraulic oil
- Cooler (side-by-side)
- Spring applied, hydraulically released, parking brakes
- Hydrostatic transmission
- Lockable fuel cap
- Hydraulic demand cooling fan
- Auto engine idle

## UNDERCARRIAGE

- Torsion Suspension (4 independent torsion axles)
- Two speed travel
- Integrated tie downs on track frame (4)

#### **FRAME**

- Machine tie down points (9)
- Removable panels for machine frame cleanout
- Support, lift arm
- Steel rear and front bumpers, welded
- Fuel fill, machine right hand side

## **OTHER**

- Auxiliary Hydraulics, Continuous Flow
- Telematics, Product Link, Cellular
- Steel engine door with replaceable louvers
- Engine door lockable
- Work tool attachment coupler
- Cat ToughGuard<sup>TM</sup> hose

# **OPTIONAL EQUIPMENT**

- External Counterweights
- Beacon, LED
- Engine Block Heater 120V
- Oil, Hydraulic, Cold Operation
- 4-point machine lifting eyes
- Paint, Custom

- Speed Sensitive Ride Control
- Bluetooth Key Security
- Attachment Hose Guide
- Corrosion Inhibitor Coating

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at **www.cat.com** 

© 2025 Caterpillar All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, VisionLink™, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ8451-04 (10-2025) Replaces AEHQ8451-03 Build Number: 05A (N Am, EU, Chile, Turkey, Colombia, S Korea)

